MORROW DESIGNS

User's Manual

DISK JOCKEY 2D (tm)

MODEL B

Table of Contents

Copyright 1980 G. Morrow

FOR TECHNICAL SUPPORT

OR REPAIR SERVICE

CALL

(415) 524-2104

User's Manual

DISK JOCKEY 2/D tm

INTRODUCTION

The Morrow Designs DISK JOCKEY 2/D Model B (DJ) board features four distinct subsections:

1. A floppy disk controller, capable of reading and writing data in either single density FM code or double density MFM code with write precompensation, which can be connected to any floppy disk drive plug compatible with the Shugart 800/850.

2. A baud rate selectable hardware UART serial interface that allows communication with a terminal device at TTY 20ma current loop or RS-232 levels.

3. Automatic address generation upon reset or power-up which allows a "jump start" to the boot strap program in the ROM contained on the board.

4. Bank select logic which allows the board to be enabled or disabled under software control. This logic also can be programed to force the board to be enabled or disabled during power-on/reset sequences.

The DJ plugs into an S-100 bus slot in a system with an 8080, 8085, or Z80 (1.7MHz - 5MHz) CPU. The controller has a cable connector for attaching a flat cable to the first floppy disk drive, and can control a chain of up to four drives daisy chained on this cable. A second connector on the DJ is provided for attaching a terminal device.

The DJ uses memory mapped I/O. Device registers used to input from and output to the floppy disk and the serial port are accessed from the CPU board of the S-100 system by references to memory addresses. Some registers differ in function depending on whether they are being read or written.

Most users will not wish to use the hardware level registers directly. Instead, they can call standard disk and serial I/O subroutines contained in 1016 bytes of EPROM memory on the DJ board. This EPROM occupies a 1024 byte block of S-100 bus memory address space. A 1024 byte RAM is also provided which is used by the EPROM firmware for the storage of various disk related variables such as the current track number, the current drive number, etc. An exact map of these variables is included at the end of the PROM listings.

The actual addresses where the I/O registers,EPROM, and RAM appear are controlled by another PROM, referred to as the address selection PROM. The PROM is supplied with standard addresses burned into it for these registers. If the standard addresses would conflict with some other device on the system bus, a PROM burned with non-standard addresses can be substituted.

The DISK JOCKEY 2/D uses 2048 bytes of memory starting at 340:000 or E000H (standard version). The first 1016 bytes are occupied by EPROM, the next 8 bytes constitute the memory mapped I/O, and the last 1024 bytes contain the RAM buffer.

ROM JUMP TABLE

Most users will wish to take advantage of the standard I/O subroutines supplied in PROM on the DJ.

The user should branch to the appropriate address in a jump table in the first few words of the system ROM. Since each subroutine ends with a RET instruction, a CALL instruction should be used to branch to the subroutine.

The jump table contains jump instructions to the true address of the utility routines within the ROM. Having a jump table allows the individual routines to be updated and moved around within the ROM without having to change software that calls the routines. Let A represent the address of word 0 of the onboard ROM. In boards with standard address decoding PROMS, A = 340:000Q (E000H). The address to call for the utility routines are then:

ADDRESS	STANDARD VALUE		SYMBOLIC VALUE	FUNCTION
	Octal	Hex		
A	340:000	E000	DBOOT	DOS bootstrap routine
A+3	340:003	E003	TERMIN	Serial input
A+6	340:006	E006	TRMOUT	Serial output
A+9	340:011	E009	TKZERO	Recalibrate (seek to TRK0)
A+12	340:014	E00C	TRKSET	Seek
A+15	340:017	E00F	SETSEC	Select sector
A+18	340:022	E012	SETDMA	Set DMA address
A+21	340:025	E015	DREAD	Read a sector of disk data
A+24	340:030	E018	DWRITE	Write a sector of disk data
A+27	340:033	E01B	SELDRV	Select a disk drive
A+30	340:036	E01E	TPANIC	Test for panic character
A+33	340:041	E021	TSTAT	Serial status input
A+36	340:044	E024	DMAST	Read current DMA address
A+39	340:047	E027	STATUS	Disk status input
A+42	340:052	E02A	DSKERR	Loop to strobe error LED
A+45	340:055	E02D	SETDEN	Set density
A+48	340:060	E030	SETSID	Set side for 2-headed drives

The specific function of each subroutine is described below.

The subroutine upon completion will execute a RET instruction. A disk subroutine that completes normally will return with the carry flag cleared to zero. A disk subroutine that detects an error condition will return with the carry flag set to 1. A program should always test the carry flag after a return from a disk utility subroutine and branch to an appropriate error handling routine if the carry flag is set.

SERIAL I/O

GENERAL

There is a hardware UART on the DJ board along with a crystal controlled baud rate generator. There are sixteen different baud rates available including 12 of the most common. The baud rate of the UART must match the baud rate of the terminal connected to the DJ board in order for the serial interface to function properly.

The UART (Universal Asynchronous Receiver-Transmitter) consists of two independent sections: a transmitter section and a receiver section. Each section has two registers. In the transmitter section one register is loaded by the system bus. The contents of this bus register are transferred to a shift register where start, stop, and (conditionally) parity bits are appended. The transmitted serial data originates from this shift register. Whenever the contents of the system bus register have been transferred to the second shift register the UART sets the TBRE (Transmitter Buffer Register Empty) bit in its status register.

In the receiver section there is a shift register which assembles a parallel data word from the input serial stream after start and stop bits have been removed. When a complete data word has been assembled in this register it is loaded into a second register that is accessible from the system bus. Whenever this bus register is loaded from the receiver shift register the UART sets the DR (Data Ready) bit in its status register.

TERMIN

This subroutine is used to collect input characters from a terminal which is connected to the serial port on the board. The routine waits for the UART to raise the DR bit of its status register. The character is then transferred to the A register and trimmed to seven bits. Reading the UART's data register automatically resets the DR bit. This routine will not return until a character arrives from the terminal.

TRMOUT

This subroutine is used to transmit characters to a terminal that is connected to the serial port on the board. The routine waits until the TBRE bit in the UART's status register is high. When this bit is high, the data in the C register of the CPU is transfered to the UART's system bus register. This automatically resets the TBRE bit.

TPANIC

This subroutine is used to detect the presence of a "panic" character in the input data stream from the terminal. A program which uses this routine must load the C register with the desired "panic" character. If the UART has collected a character (i.e. the DR bit of the UART's status register is high) and it matches the character in the C register, the routine SETS the ZERO flag of the CPU's FLAGS register. On the other hand, the routine will CLEAR this flag if 1) the DR bit is not high or 2) the character in the UART's system bus register does not match the character in the C register.

TSTAT

This subroutine is used to test the condition of the DR bit in the UART's status register. If the DR bit is high, TSTAT will SET the ZERO flag of the CPU's FLAGS register. If the DR bit is low, TSTAT will CLEAR the ZERO flag of the CPU's FLAGS register. The routine does NOT alter the state of the DR bit.

DISK I/O

To understand the significance of the disk utility subroutines, it is necessary to say a few words about how data is organized on the disk.

Information on the disk is organized into 77 concentric tracks. The disk read/write head can be moved to any track by a series of step in or step out commands. A step in command moves the read/write head one track towards the center of the disk. A step out command moves the head one track away from the center of the disk. The numbering of the tracks is arranged so that track zero is the farthest from the center of the disk. One of the responsibilities of the Western Digital 1791 / Fujitsu 8866 controller is to know the current track number over which the read/write head is located and to calculate how many step in or step out commands are necessary to move the head to a new track.

Once the read/write head has been moved to the desired track, the rotation of the disk will move a circle of magnetic material beneath the head. Within this circle of material, data is recorded in distinct regions called sectors. The sector is the smallest amount of information that can be separately read from or written to the disk. There are three different sector formats that IBM currently supports. The table below details the relationship between the size of a sector and the number of sectors that can fit on a single track.

	bytes of data per sector	sectors per track
SINGLE DENSITY	128 256 512	26 15 8
DOUBLE DENSITY	256 512 1024	26 15 8

In the header field which preceeds the data field of a sector, the track number, the side, the sector number and the sector length are recorded. During read or write commands, this header is read before data transfers take place. Whenever a seek command is issued which causes the the read/write head to move to a new track the firmware on the DJ board performs a verify which reads this sector header to make sure the head is positioned correctly and to determine if there is any change in the sector length or the density of the recorded information. If there is an error as to the track number, the firmware automatically issues a seek to track zero command to position the head over a known track.

The disk drive has a sensor that reports when the read/write head is physically positioned at track zero. A series of step out commands must be issued by the 1791/8866 controller until this status line becomes active. This operation will always position the head to the same physical track. The seek to track zero command is often called a recalibrate command and is a standard utility subroutine supplied with the disk firmware.

Transferring a sector of disk data between memory and the disk therefore involves the following steps, each corresponding to a subroutine call to the Disk Jockey firmware (with the exception of error checking):

Specify the track number the read/write head should be positioned over during subsequent data transfers between the disk and memory.

Check for error conditions.

Specify the sector number that will be involved in subsequent data transfers between the disk and memory.

Specify the starting memory address of block of data that is to be transfered to or from the disk.

Check for error conditions.

Actually perform the read or write operation.

Check for error conditions.

ROM SUBROUTINES

TRKSET - The value in the C register of the CPU specifies what track the read/write head will be positioned over when the next disk read or disk write operation is issued. A bounds check is made for a value greater than or equal to zero and less than or equal to 76. If the value in the C register is within these bounds, the contents of the C register is written into the RAM location TRACK. Otherwise no action is taken, the carry flag is set and the subroutine returns to the calling program.

SECTOR.- The value in the C register of the CPU specifies what sector will be involved in the next disk read or write operation. If the C register contains a zero, the carry flag is set and the routine returns immediately. If the C register is non-zero, the low order five bits are transfered to the RAM location SECTOR, the carry flag is cleared and the routine returns to the calling program. Just prior to a disk transfer operation a comparison is made between the value in SECTOR and the maximum number of sectors on the track that the transfer is to take place on. If the value in SECTOR exceeds the maximum number of sectors, the transfer operation is aborted and error information is reported.

SETDMA - During disk transfer operations blocks of data are moved to and from the disk. These blocks can be 128, 256, 512, or 1024 bytes long. The starting address of a data block that will be involved in the next disk transfer operation is specified by the B-C register pair when the SETDMA subroutine is called. Since the disk registers are memory mapped, the firmware has been designed to try to protect them from being written into or read from during disk transfer operations. Accordingly, a bounds check is performed before the DMA address is recorded in the Disk Jockey RAM. If a 1024 byte data transfer to or from the disk would cause memory references to the I/O registers of the disk controller, the carry flag is set and the routine returns with no action taken. If the value of the B-C pair is such that there could not be any memory references to the last eight locations of the Disk Jockey ROM during a subsequent disk operation, the contents of the B-C pair are written into the memory location of the Disk Jockey RAM specified by the label DMAADR. The carry flag is cleared and the routine ends.

SELDRV - The value of the C register determines which of 4 disk drives will be selected for the next disk transfer operation. Accordingly, the data in C is trimmed to the low order two bits and stored in the RAM location DISK. The carry flag is cleared and the routine returns to the calling program.

SETSID - Double sided floppy disk drives have two read/write heads so that information can be stored and retrieved from both sides of the diskette. The two heads are positioned so that they are both on the same track one directly below the other. They also share common read/write electronics. Therefore only one of these heads can be selected at a time. Bit 0 of the C register is used to select which of the two heads on a double sided drive will be used during the next disk transfer operation. A zero in bit 0 will select the bottom head and a 1 will select the top head. Selecting a side and selecting a disk are independent operations. If side zero is selected then regardless of the disk selected, side zero will always be accessed until SETSID is called. Finally, if the selected disk is single sided, side zero will always be selected regardless of the results of the SETSID routine.

SETDEN - The 1791/8866 Floppy Disk Controller operates in two modes: single density FM (Frequency Modulation) mode or double density MFM (Modified Frequency Modulation) mode. Bit 0 of the C register determines what density the 1791/8866 will operate in when the next disk transfer operation is initiated (0=single,1=double). Care must be exercised in the use of this routine. Under certain conditions, if the density is changed in between disk transfers that occur on the same track, the micro-program that the 1791/8866 controller executes could fall into an error loop from which it could not recover. In such a case the system would have to be reset before further disk operations could be performed. The density mode of the 1791/8866 can safely be changed when a subsequent disk transfer operation will occur on a different track than the last. It should be noted that the firmware of the Disk Jockey has the ability to automatically set the density mode of the 1791/8866. Whenever a new drive is to be selected or whenever the head is not loaded, the Disk Jockey firmware performs a "read header" operation just after positioning the read/write head (if necessary) and just before attempting to perform a disk transfer. This "read header" operation is used to establish the density of the (possibly new) track and to determine the length of the sectors on this track. If the density has not changed from the last "read header" operation or if the calling program has set the density correctly through the use of SETDEN, the process of reading the sector header is slightly faster (by approximately one and a

half diskette revolutions) than it would be if the initial assumption concerning the density was wrong.

TKZERO - This subroutine positions the read/write head to the outer-most track of the diskette: track 00. The track zero sensor is used to determine this positioning and no "read header" verify operation is performed. There are several side effects of positioning the head at track zero: (1) a flag is set in the Disk Jockey RAM to force a "read header" density/position verify operation prior to the next disk transfer operation and (2) the mode of the 1791/8866 controller will be forced to single density as long as disk transfer operations occur on track zero. All IBM compatible diskettes have track zero formatted in single density and condition (2) above relieves the system software of the burden of conditionally changing density every time the head is moved to track zero. If the rest of the disk is recorded in double density, the Disk Jockey firmware will automatically switch back to double density when the head is moved away from track zero without the intervention of external software.

READ - This subroutine transfers information from the diskette to memory. The first task is to select the proper disk drive. If the new drive is not the same as the current drive, the load head time-out flag is set and the current drive is updated to be the new drive. Next, the "head loaded" flag is tested. If the head is not loaded or if the current drive was not the same as the new drive, the head load time-out flag is set. The firmware then merges the drive select bits with the head select bit and physically selects a drive, loads the head(s), and selects a side (if the drive is double sided). If the head load time-out bit is set, a 40 millesecond delay occurs to allow for the head to settle after loading. Next the "ready" line from the drive is tested. If the drive is not ready, the head is unloaded and the routine returns to the calling program with the carry bit set and an 80H in the A register. If the drive is ready, the head is positioned in accordance with the most recent seek operation. Head motion (including a head load) or a change of disk drive will cause the firmware to verify the track position by doing a "read header" operation. The correct density of the track is also determined during this operation and the density mode is changed if necessary. If the 1791/8866 controller cannot read the header information in either density, its status is copied into the CPU's A register, the head of the drive is positioned over track zero, and the operation is terminated with the carry set. When the Disk Jockey firmware positions the head to a new track, it reads a header both to determine the proper density and to find out the length and number of the sectors on the new track. The DJ RAM location SECLEN is updated

during read header operations and contains encoded data that determines both the number and the size of sectors on the current track. After (possibly) positioning the head the firmware takes the sector address determined by the most recent set sector operation and compares it to the total number of sectors on the current track. If the desired sector is too large, the carry flag is set and the routine returns with a 10H in the A register. If the value is acceptable, the data from this sector is transfered to memory starting at the address specified by the most recent set DMA operation. The length of this transfer is determined by the length of the sectors on the current track. The last two bytes of data on the sector are not read into memory. These are the CRC check sum bytes and are used to detect data transfer errors. The 1791/8866 chip processes these bytes and then updates its status register. The last operation that the routine performs is to place the status information in the A register and conditionally set the carry flag. The details of these status bits are illustrated below.

"DREAD" REGISTER A ERROR BITS

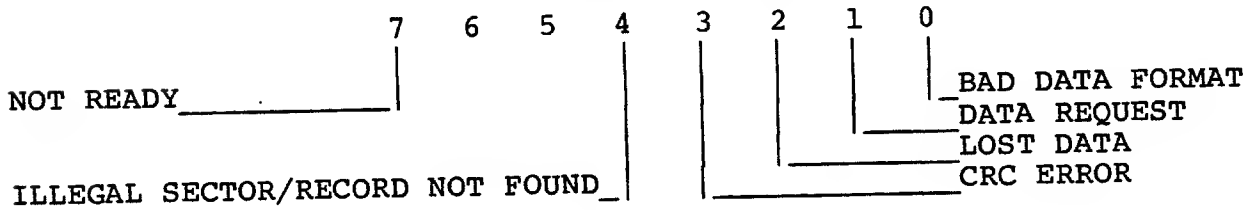

DWRITE - The flow of logic for this routine is exactly the same as described above in the read data operation up to the point where the information transfer is to take place. If all the conditions for a data transfer as described above are satisfied, a write sector command is issued to the 1791/8866 controller and information is transfered from memory to the disk drive starting at the memory address specified by the most recent DMA operation. This data is written on the sector specified by the most recent set sector operation and the head is positioned over the track specified by the most recent seek operation. As the controller writes data on the disk it is continually computing two CRC check sum bytes. After the last byte of data has been written on the diskette, the two check sum bytes are appended to the sector by the controller for later use when the sector is read back into memory. As with the read operation the controller updates its status register after the last CRC byte has been written on the diskette. These status bits are placed in the A register just before control is returned to the calling program. The carry flag is conditionally set from these bits. The details of this status information can be seen below.

"DWRITE" REGISTER A ERROR BITS

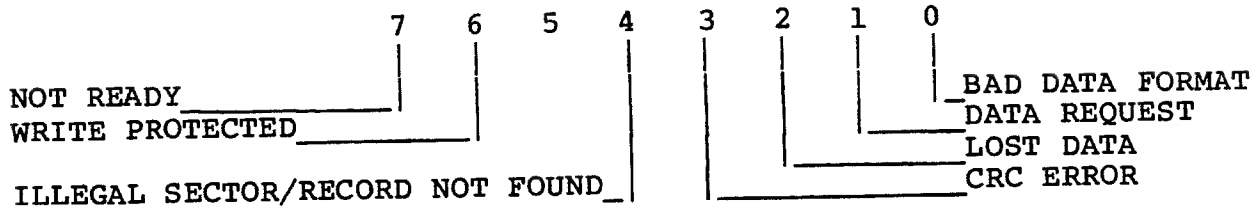

DBOOT - Branching to this routine will initiate a bootstrap load operation from the floppy disk. 128 bytes of data will be read (single density mode) into the first half of the 4th page of the Disk Jockey RAM (normally 344:000Q or E400H). The bootstrap routine terminates with a branch to the first location of this block. Typically sector 1 of track zero will contain another bootstrap program whose job it is to load a Disk Operating System (DOS) such as Disk/ATE or CP/M. If the bootstrap read is not successful, control is passed to the DSKERR utility which is described below. Before sector one is read into memory, various memory locations of the Disk Jockey RAM are initialized. Also DBOOT goes through a several second delay to insure that the system is stable. In order to effect an orderly start-up sequence, DBOOT does not require that the drive have a diskette in place when it is called. If the drive is not ready when DBOOT is called, it falls into a loop that turns on the LED at the top of the controller and slowly pulses the activity light at the front of the drive. This was done so that DBOOT could be started before a diskette was inserted in the drive. When a diskette has been inserted, the door should be closed just AFTER the activity light has been pulsed.

DMAST - This subroutine loads the B-C register pair with the current value of the DMA address recorded in the Disk Jockey RAM.

STATUS - This subroutine loads the B register with the sector number involved in the last disk transfer operation. It loads the C register with the track number the head is currently positioned over. Finally, it loads the A register with a bit pattern indicating the drive involved in the last disk transfer operation, the length of the sectors on the current track, the side specified by the last SETSID call, the density of the data during the most recent disk transfer operation, and whether the drive selected during the most recent disk operation was double sided WITH double sided media in place. The details of how this information is encoded in the A register is presented below.

A REGISTER BIT PATTERN

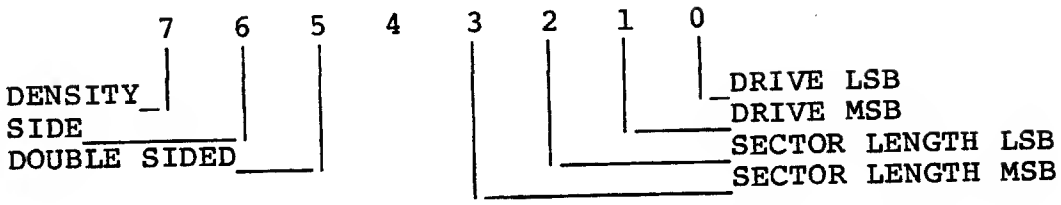

DRIVE MSB	DRIVE LSB	DRIVE NO.
0	0	DRIVE A
0	1	DRIVE B
1	0	DRIVE C
1	1	DRIVE D

SIDE BIT	SIDE SELECTED
0	SIDE 0
1	SIDE 1

SECTOR LENGTH MSB	SECTOR LENGTH LSB	SECTOR LENGTH	DENSITY
0	0	128	SINGLE
0	1	256	DOUBLE
1	0	512	DOUBLE
1	1	1024	DOUBLE

DENSITY BIT	
0	SINGLE
1	DOUBLE

DOUBLE SIDED = 1 Indicates double sided drive and diskette

DSKERR - Calling this routine will put the CPU into a loop which will cause the LED (Light Emitting Diode) at the top left portion of the controller board to flash on and off at intervals of about a second. This routine takes no parameters and will not return-- its primary usefulness is to indicate when a hard error has occured during the bootstrap load operation.

RECAP OF REGISTER A ERROR BITS

"SETDMA" 7	6	5	4	3	2	1	0	BIT
DMA ADDRESS SET TO DJ I/O SPACE								

Register A Error Codes

"DREAD"	7	6	5	4	3	2	1	0	BIT
NOT READY									
ILLEGAL DMA ADDRESS									
ILLEGAL SECTOR/RECORD NOT FOUND									
CRC ERROR									
LOST DATA									
DATA REQUEST									
BAD DATA FORMAT									

"DWRITE"	7	6	5	4	3	2	1	0	BIT
NOT READY									
WRITE PROTECTED									
ILLEGAL DMA ADDR									
ILLEGAL SECTOR/RECORD NOT FOUND									
CRC ERROR									
LOST DATA									
DATA REQUEST									
BAD DATA FORMAT									

DISKETTE INITIALIZATION

Before a new diskettte can be successfully used, it must be initialized. Most diskettes are sold pre-initialized. However, it is sometimes necessary to reinitialize a diskette. The process of initializing a diskette involves writing the header field of every sector of every track onto the diskette. None of the subroutines described in the section above can be used to write these header fields. This is a safety measure to ensure that an erroneous branch to the firmware EPROM cannot re-initialize a diskette, destroying all the data recorded on it. The initialization function for diskettes is typically provided by a command included in the Disk Operating System. CP/M diskettes furnished by Morrow Designs contain a command called FORMT# to allow the user to format diskettes in any of the four IBM compatable formats.

Data transfers to and from the disk must be preceeded by calls to certain Disk Jockey routines. The function of these routines is to set up parameters that will be used during the transfer. The following procedure is suggested:

1) Select the drive to be involved in the transfer. This is accomplished by calling the routine "SELDRV" with the proper drive number in register C. The drive need not be selected before every transfer. A drive once selected will remain selected until another drive is specified. For 2-headed drives, the side of a drive should be specified by calling the SETSID routine with the desired side number in the C register.

2) If the drive has not been accessed before, the read/write head of the drive is in an unknown position. To initialize the drive a call should be made to "TKZERO" in order to bring the head to track zero.

3) Set the DMA address. This involves calling the routine "SETDMA" with the correct value in the B-C register pair. It is not necessary to set the DMA address before every data transfer. If data is always being read into the same area of memory, then only one "SETDMA" call need be made.

4) Set the read/write head over the desired track. This involves a call to "TRKSET" with the desired track number in register C. It is only necessary to call the "TRKSET" routine when changing tracks. If the data transfer involves the same track as the previous transfer then no call to "TRKSET" should be performed.

5) Set the desired sector number. The sector can be set by calling "SETSEC" with the correct sector number in register C. If the sector has not changed since the previous "SETSEC" call, as with a read-modify-write sequence, then this routine may be skipped.

6) Read or write the desired sector. The controller can now be commanded to read or write to the disk by calling "DREAD" or "DWRITE".

The order in which these operations occur is not important with the exception that the "DREAD" or "DWRITE" routine must be called last.

Suppose sectors 5, 6, 7 and 8 of track 12, drive 1 are to be readto or from memory starting a location 7:000Q (700H). The following programs will do this:

Utilizing Disk Jockey Firmware

Example of Disk Read

```
001:000 061 356 346      1    READ     LXI   SP,200H     set up the stack
001:003 257              2             XRA   A           select drive A
001:004 117              3             MOV   C,A
001:005 315 363 341      4             CALL  SELDRV
001:010 315 362 341      5             CALL  TKZERO      recalibrate the hea
001:013 016 014          6             MVI   C,12        seek the head to
001:015 315 313 342      7             CALL  TRKSET      track 12
001:020 001 005 004      8             LXI   B,4:005Q    sector count&number
001:023 305              9             PUSH  B           save sector cnt&num
001:024 001 000 160      10            LXI   B,7000H     set up read address
001:027 315 011 342      11   LOOP     CALL  SETDMA
001:032 301              12            POP   B           restore sect to rea
001:033 305              13            PUSH  B
001:034 315 166 342      14            CALL  SETSEC      set up sect to read
001:037 315 042 342      15            CALL  DREAD       read the sector
001:042 332 070 001      16            JC    ERROR       test for error
001:045 301              17            POP   B           restore sect cnt&nu
001:046 005              18            DCR   B           update count
001:047 312 073 001      19            JZ    DONE
001:052 014              20            INR   C           update sector numbe
001:053 305              21            PUSH  B           save count&number
001:054 315 352 341      22            CALL  DMAST       dma address into B-
001:057 041 000 001      23            LXI   H,100H      add sector size to
001:062 011              24            DAD   B           current address
001:063 345              25            PUSH  H           new address into B-
001:064 301              26            POP   B
001:065 303 027 001      27            JMP   LOOP        continue reading
001:070 303 070 001      28   ERROR    JMP   ERROR       error stop
001:073 303 073 001      29   DONE     JMP   DONE
```

Example of Disk Read

```
0100    31 EE E6        1   READ    LXI   SP,200H    set up the stack
0103    AF              2           XRA   A          select drive A
0104    4F              3           MOV   C,A
0105    CD F3 E1        4           CALL  SELDRV
0108    CD F2 E1        5           CALL  TKZERO     recalibrate the hea
010B    0E 0C           6           MVI   C,12       seek the head to
010D    CD CB E2        7           CALL  TRKSET     track 12
0110    01 05 04        8           LXI   B,4:005Q   sector count&number
0113    C5              9           PUSH  B          save sector cnt&num
0114    01 00 70        10          LXI   B,7000H    set up read address
0117    CD 09 E2        11  LOOP    CALL  SETDMA
011A    C1              12          POP   B          restore sect to rea
011B    C5              13          PUSH  B
011C    CD 76 E2        14          CALL  SETSEC     set up sect to read
011F    CD 22 E2        15          CALL  DREAD      read the sector
0122    DA 38 01        16          JC    ERROR      test for error
0125    C1              17          POP   B          restore sect cnt&num
0126    05              18          DCR   B          update count
0127    CA 3B 01        19          JZ    DONE
012A    0C              20          INR   C          update sector numbe
012B    C5              21          PUSH  B          save count&number
012C    CD EA E1        22          CALL  DMAST      dma address into B-C
012F    21 00 01        23          LXI   H,100H     add sector size to
0132    09              24          DAD   B          current address
0133    E5              25          PUSH  H          new address into B-C
0134    C1              26          POP   B
0135    C3 17 01        27          JMP   LOOP       continue reading
0138    C3 38 01        28  ERROR   JMP   ERROR      error stop
013B    C3 3B 01        29  DONE    JMP   DONE
```

WRITE:

The following program writes from memory starting at 200:000Q (8000H) onto tracks 4,5, and 6 of disk drive 1.

```
001:000 061 356 346      1    WRITE    LXI   SP,200H     set up the stack
001:003 257              2             XRA   A           select drive A
001:004 117              3             MOV   C,A
001:005 315 363 341      4             CALL  SELDRV
001:010 315 362 341      5             CALL  TKZERO      recalibrate the hea
001:013 001 000 177      6             LXI   B,8000H-100H set initial adrs.
001:016 315 011 342      7             CALL  SETDMA
001:021 076 004          8             MVI   A,4         initial track numbe
001:023 062 112 001      9    TLOOP    STA   TEMP        save track number
001:026 117              10            MOV   C,A         seek to correct trk
001:027 315 313 342      11            CALL  TRKSET
001:032 001 001 032      12            LXI   B,32:001Q   sector count&number
001:035 305              13   SLOOP    PUSH  B           save sect and count
001:036 315 352 341      14            CALL  DMAST       get current address
001:041 041 000 001      15            LXI   H,100H      update to next sect
001:044 011              16            DAD   B
001:045 345              17            PUSH  H           move address to B-C
001:046 301              18            POP   B
001:047 315 011 342      19            CALL  SETDMA      set up new address
001:052 301              20            POP   B           restore sect cnt&nu
001:053 305              21            PUSH  B
001:054 315 166 342      22            CALL  SETSEC      set up next sector
001:057 315 123 342      23            CALL  DWRITE      write the data
001:062 332 107 001      24            JC    ERROR       test for error
001:065 301              25            POP   B           recover sect cnt&nu
001:066 014              26            INR   C           update sector
001:067 005              27            DCR   B           update count
001:070 302 035 001      28            JNZ   SLOOP
001:073 072 112 001      29            LDA   TEMP        get current track
001:076 074              30            INR   A           update track
001:077 376 007          31            CPI   7           check if all done
001:101 302 023 001      32            JNZ   TLOOP       continue to next tr
001:104 303 104 001      33   DONE     JMP   DONE
001:107 303 107 001      34   ERROR    JMP   ERROR       error exit
001:112 000              35   TEMP     DB    0           track storage
                         36
```

WRITE:

The following program writes from memory starting at 200:000Q (8000H) onto tracks 4,5, and 6 of disk drive 1.

```
0100    31 EE E6        1   WRITE   LXI   SP,200H     set up the stack
0103    AF              2           XRA   A           select drive A
0104    4F              3           MOV   C,A
0105    CD F3 E1        4           CALL  SELDRV
0108    CD F2 E1        5           CALL  TKZERO      recalibrate the head
010B    01 00 7F        6           LXI   B,8000H-100H set initial adrs.
010E    CD 09 E2        7           CALL  SETDMA
0111    3E 04           8           MVI   A,4         initial track number
0113    32 4A 01        9   TLOOP   STA   TEMP        save track number
0116    4F              10          MOV   C,A         seek to correct trk
0117    CD CB E2        11          CALL  TRKSET
011A    01 01 1A        12          LXI   B,32:001Q   sector count&number
011D    C5              13  SLOOP   PUSH  B           save sect and count
011E    CD EA E1        14          CALL  DMAST       get current address
0121    21 00 01        15          LXI   H,100H      update to next sect
0124    09              16          DAD   B
0125    E5              17          PUSH  H           move address to B-C
0126    C1              18          POP   B
0127    CD 09 E2        19          CALL  SETDMA      set up new address
012A    C1              20          POP   B           restore sect cnt&num
012B    C5              21          PUSH  B
012C    CD 76 E2        22          CALL  SETSEC      set up next sector
012F    CD 53 E2        23          CALL  DWRITE      write the data
0132    DA 47 01        24          JC    ERROR       test for error
0135    C1              25          POP   B           recover sect cnt&num
0136    0C              26          INR   C           update sector
0137    05              27          DCR   B           update count
0138    C2 1D 01        28          JNZ   SLOOP
013B    3A 4A 01        29          LDA   TEMP        get current track
013E    3C              30          INR   A           update track
013F    FE 07           31          CPI   7           check if all done
0141    C2 13 01        32          JNZ   TLOOP       continue to next tr
0144    C3 44 01        33  DONE    JMP   DONE
0147    C3 47 01        34  ERROR   JMP   ERROR       error exit
014A    00              35  TEMP    DB    0           track storage
                        36
```

An assembled Disk Jockey 2D is part of a DISCUS 2 system and is also accompanied by a copy of CP/M. The supplied CP/M is tailored to the I/O on the Disk Jockey 2D controller. CP/M expects that a serial TTY/RS-232 terminal is connected to P2 (serial port) of the Disk Jockey. CP/M is supplied on a write protected diskette (notch open) which should be kept that way. DO NOT COVER THE NOTCH ON THE DISKETTE. The system is designed to self load when the disk is placed in drive A and a branch is made to 340:000Q (E000H). The CP/M diskette is accompanied by a series of manuals describing how to back-up a CP/M diskette.

Copies of CP/M which are purchased through Morrow Designs are supplied on a diskette which loads into the system through the use of the bootstrap loader DBOOT. To use DBOOT the system should be turned on and the CPU's program counter should be initialized to 340:000Q (E000H) either from the front panel of the computer or through jump-start logic either on the controller or on some other board in the system. A 2-3 second delay occurs when DBOOT is called so that the system has time to stabilize before the disk is accessed. Power should be applied to the drive(s) that are connected to the Disk Jockey controller at or before the time it is supplied to the CPU. However the system should be given time to stabilize before a diskette is inserted a drive. DBOOT always loads from drive A. If a diskette is not in place when DBOOT is started, the activity light at the front of drive A is slowly pulsed to indicate that the bootstrap loader is waiting for a diskette to be inserted in the drive and the door to be closed. The proper time to close the door is just AFTER the activity light has flashed. Shortly after the door is closed the drive signals the controller that it is ready and a loader program on sector one of track zero is read into the Disk Jockey RAM. When DBOOT is finished, it transfers control to this secondary loader.

I/O CONNECTORS P1 AND P2

Illustrated below are the details of the pin connections of P1 and P2. In both illustrations, the top of the circuit board is to the right of the drawing. The end pins of both connectors are numbered on the silk screen legend of the PC board. Note that all disk interface signals are active low.

P2

RS232 GROUND	*	1
RS232 INPUT	*	2
RS232 OUTPUT	*	3
TTY+ INPUT	*	4
TTY- INPUT	*	5
TTY+ OUTPUT	*	6
TTY- OUTPUT	*	7

P1

	50	* *	49 GND
	48	* *	47 GND
-DISK DATA	46	* *	45 GND
-WRITE PROTECT	44	* *	43 GND
-TRACK ZERO	42	* *	41 GND
-WRITE GATE	40	* *	39 GND
-WRITE DATA	38	* *	37 GND
-STEP	36	* *	35 GND
-DIRECTION	34	* *	33 GND
-DRIVE SELECT 4	32	* *	31 GND
-DRIVE SELECT 3	30	* *	29 GND
-DRIVE SELECT 2	28	* *	27 GND
-DRIVE SELECT 1	26	* *	25 GND
-SECTOR	24	* *	23 GND
-READY	22	* *	21 GND
-INDEX	20	* *	19 GND
-LOAD HEAD	18	* *	17 GND
-IN USE	16	* *	15 GND
	14	* *	13 GND
	12	* *	11 GND
-TWO SIDED	10	* *	9 GND
	8	* *	7 GND
	6	* *	5 GND
	4	* *	3 GND
	2	* *	1 GND

PATCHES FOR CP/M*

General

This section is included for those users of the Disk Jockey 2D who have purchased a copy of CP/M Vers. 1.4 from a source OTHER than Morrow Designs. Copies of CP/M sold through Morrow Designs have the necessary I/O routines to interface CP/M to the Disk Jockey controller and to the DJ2D's serial I/O facility. These patches will help create a SINGLE DENSITY CP/M diskette--NOT a double density one. Though this may seem of marginal interest at first glance, we would point out that this section, combined with the software listings provided in the back of this manual, constitutes an excellent example of interfacing the Discus 2D to a significant disk operating system.

At the end of this section are two listings which are designed to allow the Disk Jockey to be interfaced with the Digital Research CP/M operating system. This can be done with a minimum of effort.

The first listing is the so called "cold start loader" which is used to bring CP/M in from the disk. It also has code which will allow the user easily to write a modified version of CP/M out on the disk. There is even a small routine which writes the "cold start loader" itself on sector 1 of track 0.

The second listing is CBIOS software (Custom Basic Input-Output System) which is the interface between CP/M and the Disk Jockey controller. The general idea is to key in the cold start loader, use the loader to bring CP/M in from a diskette, enter the CBIOS code and, finally, use the cold start loader to save everything out on a clean diskette.

The "Cold Start Loader"

There are three parts to the cold start loader. LOAD is at address 347:000Q (0E700H) and is designed to read CP/M into memory from location 51:000Q (2900H) to 77:377Q (3FFFH). After loading CP/M, the LOAD routine branches to location 76:000Q (3E00H) which is a routine that initializes several memory locations, prints a sign-on message, and then branches to CP/M proper.

SAVE is at location 347:111Q (0E749H) and is the reverse of LOAD. SAVE writes out on the disk starting at track 0 sector 2 all memory locations between 51:000Q (2900H) and 77:377Q (3FFFH). After performing this operation, SAVE comes to a dynamic halt at STALL 347:133Q (0E75BH).

INTLZ is a short routine which writes locations 347:000Q (0E700H) through 347:177Q (0E77FH) on sector 1 of track 0. Thus, once the cold start loader is keyed into memory, it can save itself at the right location on the disk.

*CP/M is a trademark of Digital Research

CBIOS

The standard version of CP/M is designed to run with the Intel MDS development system and floppy disk interface. Most of the CP/M system software is completely independent of the particular 8080 hardware environment in which it happens to be running. However, there is a certain part which must be tailored to the hardware of the host system. This hardware dependent software is completely contained on pages 76 and 77 of CP/M memory (assuming the standard 16K version). CP/M can be made to run on different hardware by changing the software on pages 76 (3E00H) and 77 (3F00H). The CBIOS software which is supplied with the Disk Jockey is designed to let CP/M run when an eight inch full sized floppy disk is attached to the Disk Jockey controller that is plugged into an S-100 main frame.

Patching CP/M

Before actually performing any of the steps below, the Disk Jockey should be plugged into an S-100 bus mainframe, and an 8" disk drive should be connected to the controller. Be sure to observe correct cable orientation. You should have on hand two diskettes: one with CP/M and a blank one that has been formatted. A copy of CP/M which will run on the Disk Jockey will be constructed on the blank disk before any changes are attempted on the original CP/M disk. As a precaution, the diskette with the CP/M binary should have a write protect notch and this notch should NEVER be covered during the following steps.

Step I:

Plug in the controller. Connect the disk to the controller and turn on the the CPU and the disk drive. Do NOT put a diskette in the drive at this time.

Step II:

Be sure the drive is on and the door is OPEN. Initialize the CPU's program counter to 340:000Q and start the machine. After a several second delay, the LED at the top of the controller should turn on and the activity light (if one is present) on the front of the drive should flash briefly every several seconds. Various memory locations in the Disk Jockey RAM are now initialized and the firmware is ready to perform disk transfer operations. Stop the CPU.

Step III:

Enter the "cold start loader" into memory starting at location 347:000Q (0E700H). The instructions will extend from 347:000Q (E700H) to 347:177Q (0E77FH),filling most of the first half of the last page of RAM on the controller.

Step IV:

Set the program counter of the CPU to location 347:142Q (0E762H), but do NOT start the CPU yet.

Step V:

Insert the BLANK diskette into the drive and close the door. Be sure that the diskette is NOT write protected. (An 8" write protected diskette has a notch near the corner of the diskette diagonally oppoiste the labled corner.) If this notch is missing or covered, the diskette is not write protected. Be sure the diskette is inserted right side up. On a Disk Jockey system, the label will be on the top . The diskette is inserted in the drive with the label held bewteen the thumb and forefinger.

Step VI:

Start the computer. The drive activity light (if one is present) will come on, the head will load and step out to track 0 unless it is there already. After sixteen revolutions of the diskette, the head will unload and the activity light will go off.

Step VII:

Stop the CPU. It should be in the tight loop JMP DONE -- 303 171 347 octal (C3 79 E7 hex). The cold start loader has been written on sector 1 of track 0.

Step VIII:

Remove the diskette from the drive.

Step IX:

Change location 347:001Q (0E701H) from 000Q (00H) to 133Q (5BH) and change location 347:002 (0E702H) from 76Q (3EH) to 347Q (0E7H).

Step X:

Initialize the program counter of the CPU to 347:000Q (E700H) but do NOT start the machine.

Step XI:

Insert the CP/M diskette and be sure that the write protect notch is not covered. Close the door securely

Step XII:

Start the CPU. The head will load and after a second or two the head will step to track 1. Wait for the head to unload and the activity light to go off. CP/M has been loaded into memory between 51:000Q (2900H) and 77:377Q (3EFFH).

Step XIII:

Enter the CBIOS code starting at 76:000Q (3E00H). Be sure to check that the code has been entered correctly.

Step XIV:

Initialize the program counter of the CPU to 347:111Q (E749H) but do NOT start the CPU.

Step XV:

Take the diskette which has the cold start loader on track 0 sector 1 and place it in the drive. Be sure that this diskette is still write enabled (the notch should be covered).

Step XVI:

Start the CPU. The head should load, return to track 0 and write the better part of tracks 0 and 1 before it unloads. After the head unloads, remove the diskette and remove the write enable tab from the diskette. Stop the CPU. The CPU should be executing the JMP STALL instruction -- 303 133 347 octal (C3 5B E7 hex).

Step XVII:

Connect a terminal to the serial port of the Disk Jockey and adjust the baud rate, parity, stop bits, and word length of the terminal and controller so that they match.

Step XVIII:

Inspect the diskette which was removed in step XVI. Be sure that the write protect notch is NOT covered. Insert the diskette in the drive once again. Initialize the CPU's program counter to 340:000Q (E000H) and start the machine. After a few seconds the terminal should print:

16K CP/M VERS/1.4

After a few more seconds the prompt should appear:

A>

A Disk Jockey version of CP/M is now up and running. After this new version of CP/M has been tested (as documentated in the CP/M manual), Steps I through XVII can be used to alter the original CP/M diskette if desired.

HARDWARE LEVEL REGISTERS

Users desiring a greater level of control over the floppy disk or serial interface may wish to refer directly to the I/O device registers on the DJ from their 8080 or Z80 program. There are fourteen one-byte registers-- five of them read only, six write only and three read/write. The registers have eight memory addresses on the S-100 bus with a different register being selected during a read operation and a write operation when the addressed register is read only or write only.

The 1791/8866 controller comprises one of the read only registers (status register), one write only register (command register), and all three of the read-write registers (track, sector, and data registers). The uses of these registers will be touched on only briefly here as there is included in the documentation a detailed data sheet describing the way in which the 1791/8866 controller functions.

The 1602 UART comprises two of the read only registers (input data and status registers) and one of the write only registers (output data). As with the 1791/8866, we do not describe these registers in great detail since a data sheet for the 1602 is also included in the documentation.

The 1791/8866 controller has a negative logic data bus. For this reason the internal bidirectional data bus of the DJ board is also negative logic. However, the bus of the 1602 UART is positive logic. This means that when references are made to the UART registers, the signal levels are opposite to what one would normally expect. In practice then, one should always invert data just before it is written into the UART output register; likewise, data read from the UART should be inverted before it is interpreted.

READABLE REGISTERS

Register 0 - The inverted UART data output register
Location 343:370 (E3F8 hex) standard Disk Jockey:

Data is stored in this register by the UART after it has been assembled from the serial data input stream. When a new character is assembled and transferred to this register, the UART sets the DR (Data Ready) flag. When this register is read by the CPU, the DR flag is reset by the UART hardware.

Register 1 - The inverted UART status register
Location 343:371 (E3F9 hex) standard Disk Jockey

Only the low order five bits of this register have any significance. The meaning of these bits is presented below. The 1602 data sheet should be referred to for a more detailed discussion of these bits. We shall list these signals using their positive logic mnemonics with the understanding that the actual signals read will be the negation of these mnemonics.

INVERTED UART STATUS BITS

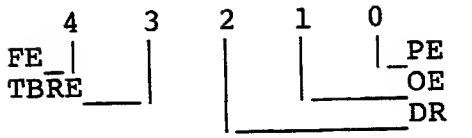

FE = Framing Error
TBRE = Transmitter Buffer Register Empty
DR = Data Ready
OE = Overrun Error
PE = Parity Error

Register 2 - Disk Jockey status register
Location 343:372 (E3FA hex) standard Disk Jockey

This register contains bits that identify the current status of the Disk Jockey and the currently selected drive. Only the six low order bits have any significance in this register. The meanings of these bits are presented below:

DISK JOCKEY STATUS REGISTER

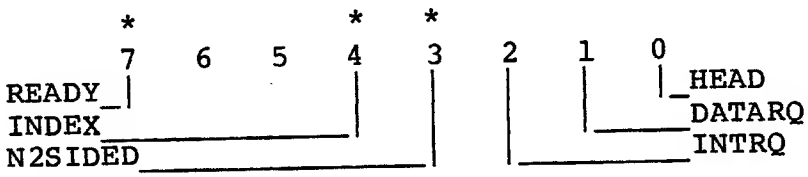

Bits marked with an asterisk reflect the current state of the status lines from the currently selected floppy disk drive. For a detailed specification of these signals see the documentation that accompanys the floppy disk drive. If no drive is currently selected or if the head is not loaded these bits are all high.

READY - This bit is a 1 when the currently selected drive is powered up with a diskette in place and the door closed.

INDEX - This line reflects the status of the INDEX line from the floppy disk drive. It goes to a 1 once per revolution of the diskette.

N2SIDED- This line is a 0 when a double sided drive is connected to the controller AND there is a double sided diskette in place in the drive with the door closed.

HEAD - When this line is a 1 the head of the currently selected floppy disk drive is loaded.

DATARQ - When this line is a 1 the data request line from the 1791/8866 controller is high and the controller is requesting that its data register be read from or written to. When the data register is referenced, this line will change to a 0.

Hardware level registers

INTRQ - The 1791/8866 controller sets this line to a one whenever it has completed a command and is no longer busy. This line is reset by a reference to the command register or the status register of the 1791/8866 controller.

Register 3 - Not currently used
Location 343:373 (E3FB hex) standard Disk Jockey

Register 4 - 1791/8866 controller status register
Location 343:374 (E3FC hex) standard Disk Jockey

This is the status register of the 1791/8866 controller. The meaning of the bit patterns of this register varies depending upon the command that the controller is executing or has executed. See the 1791/8866 data document for a detailed discussion of this register.

WRITE ONLY REGISTERS

Register 0 - The inverted UART data input register
location 343:370 (E3F8 hex) standard Disk Jockey

Inverted data is stored is this register by the CPU for serial output by the UART. The UART transfers the data from this register to an internal parallel load serial output register where the start bit optional parity bit and the stop bits are appended to the data. Whenever the UART empties register 0, the TBRE status bit is raised to inform the CPU that it is possible to output more data to the UART.

Register 1 - Disk Jockey drive control register
location 343:371 (E3F9 hex) standard Disk Jockey

This is an eight bit register that is used to select one of four possible drives that can be connected to the controller, select side one or side two for double headed drives, enable or disable the interrupt control capabilities of the controller, enable or disable the stall logic of the controller during data accesses to the 1791/8866's data register, and set or clear the master reset pin of the 1791/8866 controller and the VCO oscillator. During power-up and system bus resets, is register is initialized so that it is as if ones had been written in all eight bits. The specific nature and use of the bits in this register is presented below:

DRIVE CONTROL REGISTER

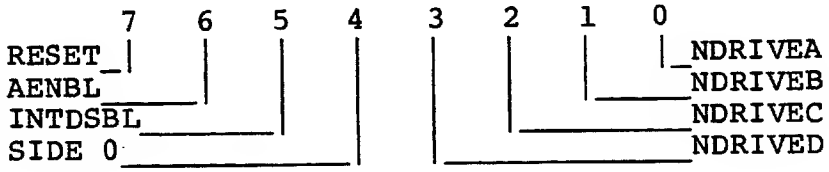

RESET - When a one is stored in this bit, the master reset pin of the 1791/8866 is active and the controller chip is in a reset condition and will not accept any commands. The Voltage Controlled Oscillator of the Phase Lock Loop is also disabled and the Phase Lock Loop will not process any data to produce data windows for the 1791/8866. This bit is used to reinitialize the 1791/8866 in the event that the micro-program in the controller chip becomes confused and gets lost trying to read bad data. When a zero is stored in this bit (after a one value) the VCO of the Phase Lock Loop will properly start and the 1791/8866 will execute a home command and place itsef in a state to accept commands.

AENBL - When the CPU references the 1791/8866's data register during a data transfor, the PREADY line (S-100 bus line 72) is brought low which puts the processor in a wait state. The CPU remains in this state until the 1791/8866 raises its DATA REQUEST line. This mode of operation dispenses with the usual status test during data transfers and makes it possible for the Disk Jockey to run at double density speeds without having to use a DMA channel. However, there are times when the CPU needs access to the data register even though the DATA REQUEST LINE is low and will stay low (just before a seek command is issued, for example). When the AENBL bit is a one, the stall logic that usually governs accesses to the 1791/8866's data register is disabled. This allows the CPU to have access to this register as if it were a normal memory location. However, before the Disk Jockey can move data to or from the floppy disk drive, this bit must be a zero so that the CPU can synchronize its data transfers to the 1791/8866 controller.

INTDSBL - When this bit is a zero, the interrupt request line of the 1791/8866 controller is enabled to request interrupts on the S-100 system bus. When this bit is a one, no interrupts can be generated by the controller. The user should consult the 1791/8866 data sheet for a thorough understanding of the chip's interrupt request line.

SIDE 0 - When a double headed drive is connected to the Disk Jockey, a zero in this bit will enable head 1 whenever the drive is selected. A zero will enable head 0. If a single headed drive is selected, this bit has no effect on the drive.

NDRIVED - When this bit is a zero and the head isloaded, the fourth or last drive is selected. A one written in this bit will deselect the last drive.

NDRIVEC - This is the drive select bit for the third drive connected to the Disk Jockey. A zero selects the third drive when the head is loaded while a one deselects the third drive.

NDRIVEB - The drive select bit for the second drive connected to the Disk Jockey. When the head is loaded, a zero in this bit will select the second drive while a one will deselect it.

NDRIVEA - The drive select bit for the first drive connected to the Disk Jockey. A zero in this bit will select the first drive when the head is loaded and a one will deselect it.

Only one of the four low order bits of this register should ever be a zero. If more than one of these bits are zero, loading the head will select more than one drive and cause data errors during reads and possible head position errors on seeks.

Register 2 - The Disk Jockey function register
Location 343:372 (E3FA hex) standard Disk Jockey

Only the low order four bits of this register have any significance. Two bits load and unload the read/write head of the drive, one determines the density mode that the 1791/8866 controller operates at, and the last is used to turn on and off the LED at the top of the PC board. During power-up and system bus reset, this register is initialized so that it is as iff ones had been written in all four bits. The specific function of the various bits in this register is detailed below:

DISK JOCKEY FUNCTION REGISTER



LEDOFF - When a one is stored in this bit, the LED at the top of the circuit board is turned off. A zero will turn the LED on.

SINGLE - When this bit is a one, the DJ board will read and write data to and from the disk in single density. When this bit is a zero, reads and writes are performed in double density.

HD0,HD1 - These two bits control the loading of the read/write head. Their functional character is detailed in the table below.

HD1	HD0	Read/write head function
0	0	head is loaded
0	1	not allowed
1	0	1791/8866 may unload head
1	1	head is unloaded

Register 3 - Not currently used
Location 343:373 (E3FB hex) standard Disk Jockey

Register 4 - 1791/8866 controller command register
Location 343:374 (E3FC hex) standard Disk Jockey

This is the command register of the 1791/8866 controller. There are four different classes of commands and within each class there are a number of separate commands that the controller can execute. See the 1791/8866 data document for a detailed discussion of this register and its use.

READ-WRITE REGISTERS

Register 5 - 1791/8866 track register
Location 343:375 (E3FD hex) standard Disk Jockey

The 1791/8866 controller uses this register as a reference to where the read/write head of the disk drive is positioned. Extreme care should be exercised when writing in this register. If care is not exercised, seek errors may likely occur. See the 1791/8866 data document for a more detailed discussion.

Register 6 - 1791/8866 sector register
Location 343:376 (E3FE hex) standard Disk Jockey

This is the sector register of the 1791/8866 controller. Only one of the commands will cause the 1791/8866 to write in this register. Generally the 1791/8866 uses this register to determine which sector is to be read or written. See the 1791/8866 data document for a more detailed discussion.

Register 7 - 1791/8866 data register
Location 343:377 (E3FF hex) standard Disk Jockey

This is the data register of the 1791/8866 controller. Data is written into this register when the controller is writing to the disk. Data is read from this register when the controller is reading from the disk. The desired track number is also written in this register when seek commands are issued to the controller. As before the 1791/8866 data document should be referred to for a more complete discussion

FINAL NOTE

The Disk Jockey firmware contains numerous examples illustrating the use of the hardware registers listed above. A comprehensive study of the two Western Digital data documents along with a careful examination of the Disk Jockey firmware will equip the interested user with enough knowledge to control the disk drive at the hardware level.

BOARD SELECT BY I/O ADDRESS -- BANK SELECTION

The purpose of "Bank Selection" is to allow more memory in a system than the CPU can normally address. This is accomplished by assigning a board not only a memory address somewhere within the 64K range of addressable memory, but also a bit position within a special dedicated I/O port - port 40H (100Q). Port 40H is called the "Bank Select Port" and is used by a wide variety of S-100 hardware manufacturers exclusively for this purpose. With this scheme, it is possible to have as much as 524,288 bytes of memory on the S-100 bus without addressing conflicts.

System software and user programs are growing larger each day and it is clear that memory mapped devices such as the Disk Jockey must exercise care in the way that they use S-100 bus memory space. To make way for the increased need for memory space, the Disk Jockey now implements the bank select port, port 40H, so that the 2K of memory space that the board uses can be assigned to any of eight banks within the extended address space on the bus. Another feature of the board is its ability to select or de-select itself during power-on clear or bus resets.

To implement the bank select logic on the board, the user must decide which bit within port 40H will be used to select and de-select the board. This bit is selected by installing a jumper on the board. A decision must also be made as to whether the board should select or de-select itself when POC* (bus line 99) or PRESET* (bus line 75) is active. This decision is made by the installation of another jumper. The details of these two jumper options are presented below:

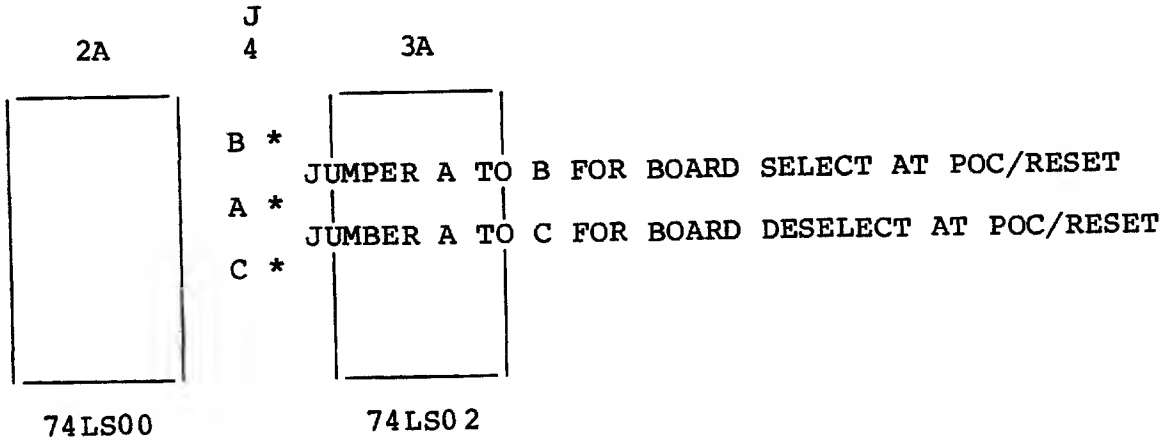

Factory assembled boards will be shipped with a jumper installed between A and B so that the board will select itself during POC* or PRESET*. If for some reason this choice is not acceptable to the user, it is easy to remove the jumper and install it between A and C. It is necessary that one of the two jumpers always be installed, even if the board is not to be used in a bank select environment. If the bank select logic is not to be used, the jumper should be between A and B. A final note - both jumpers should never be installed simultaneously.

Bank Select Logic - Bit Selection

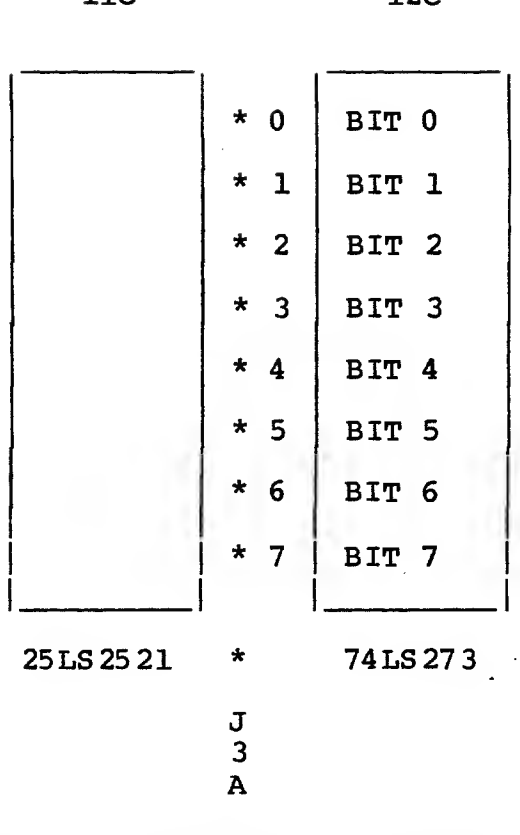

The bank select scheme will provide for eight banks of memory each having 64K bytes. These banks are numbered 0 through 7 which correspond to the bit positions in the illustration at the right. The pad just above J3A below should be jumpered to exactly one of the pads to the right. The bit number to the right of the pad will determine the memory bank that the Disk Jockey will reside in. Once this choice is made, the Disk Jockey will be enabled or disabled when the CPU executes an OUT 40H insruction. The pattern in the A register will determine whether the board is selected or not. Suppose, for example, that J3A is connected to bit 7. Then the Disk Jockey will be enabled when the CPU executes an OUT 40H instruction and the A register has a pattern such that bit 7 is a one. The values of the other bits have no influence on whether the board will be selected or not. If bit 7 is a zero, the board will be deselected. Again, the values of the other bits have no influence. However, for the bank select scheme to work properly, when an OUT 40H instruction is executed, usually only one of the bits in the A register should be a one. In this way, only one bank of memory will be selected at one time.

The bank select logic on the Disk Jockey board can be disabled by removing the 25LS2521 IC from position 11C.

INTERRUPT LOGIC

Whenever the 1791/8866 disk controller chip finishes an operation such as read sector, seek to a track, seek to track 0, etc., it raises an internal interrupt request flag which is brought to the outside world on pin 39 of the device. This flag can be used to inform external hardware that the chip is ready to execute new tasks. The present version of the Disk Jockey controller buffers this signal and makes provision for the user to connect it to any of the nine different interrupt lines available on the S-100 bus.

Presently there is not a great deal of interrupt driven software available for microcomputer systems. However, this will probably change as the user demand for increased system speed and performance begins to be felt by software vendors. It is also fair to say that interrupt driven operating systems are somewhat more complex and require a great deal more thought to implement than operating systems which are not interrupt driven. Operating systems such as UNIX have been designed with interrupts in mind while operating systems such as CP/M were designed before people seriously considered using classic interrupt techniques in a microcomputing environment.

The Disk Jockey interrupt logic is implemented by installing a jumper at the lower left hand area of the circuit board. The jumper should originate at the open pad just to the left of J1A and should connect to ONLY ONE of the pads below the symbols VI0, VI1, VI2, VI3, VI4, VI5, VI6, VI7, or PINT. Unless there is a vectored interrupt controller on the bus or on the system's CPU board, the jumper connection should be made to PINT. After the interrupt jumper is installed, interrupts from the 1791/8866 can be enabled or disabled by writing a 0 or 1 in bit 5 of the Disk Jockey drive control register (write only register #1). For the details please refer to the section on Hardware Level Registers. The jumper pad layout for installing interrupts on the DJ board are shown below:

```
                * J1A

                                        P
V  V  V  V  V  V  V  V  I
I  I  I  I  I  I  I  I  N
0  1  2  3  4  5  6  7  T

*  *  *  *  *  *  *  *  *
```

BOOT LED

Just to the left of P1, the right angle header connector for the disk drive, is the boot LED. This LED (light emitting diode) will slowly flash on and off if the DBOOT routine cannot load the bootstrap from the diskette. Since the boot routine does not use any of the terminal I/O logic, this LED is helpful in determining whether a go/no-go attempt at bringing up an operating system is due to faulty I/O hardware and/or drivers or due to some other cause-- memory, diskette media, controller, CPU, etc.

BOOTING WITHOUT A DISKETTE

If no diskette has been placed in Drive A and a boot is attempted (as is often the case during a power-on-jump when the system is first powered up), the red activity light at the front of the Drive A will flash on briefly about once every second and the boot LED will turn on without flashing. It is possible to execute a bootstrap load in this mode. Insert a system diskette into Drive A. Do not lower the door, but push the diskette into the drive far enough so that it locks into place (the higher the drive door, the easier for the diskette to lock into place). Wait for the activity light at the front of the drive to flash on and off and, when it goes off, close the drive door. The system will boot the next time the drive activity light goes on.

POWER STABILIZATION

Whenever the bootstrap load DBOOT routine is called, the head on Drive A will not load (as evidenced by the drive activity LED at the front of the drive) for a second or two. There is a built in delay in DBOOT to make sure that all components of the system are stable and have finished any reset processes that may occur when the system encounters an active POC* (negative logic power-on-clear) or PRESET* (negative logic bus reset) signal. This delay precaution is especially important when power is first applied to a system which does a power-on-jump to the controller.

PHANTOM LOGIC

The DJ will respond to the PHANTOM* line (S-100 pin 67) if paddle 6 of switch 1 is placed in the 'on' position. This paddle is the third from the top of the LEFT switch which is at position 5D on the circuit board. The Disk Jockey controller will become de-selected when the PHANTOM* is active (logic zero) if this paddle is on. If this paddle is placed in the 'off' position, the DJ controller will ignore the PHANTOM* line. In order for the Power-on Jump feature of the controller to work on a SOL computer, the PHANTOM* switch must be on.

The DJ can also generate PHANTOM* whenever the prom or ram on the DJ is accessed. This feature can be used to disable other memory boards in the system which may conflict with the memory address of the DJ. To enable this feature install the jumper J2 on the circuit board. With jumper J2 installed the DJ will drive the PHANTOM* line low (active state) whenever the address on the S-100 bus matches the addresses occupied by the DJ. Note that if jumper J2 is installed AND the PHANTOM* enable switch is on the DJ will never become selected. Only one of the PHANTOM* options of the DJ can be used at a time.

4 MHz OPERATION

The Disk Jockey controller has been designed to work at all three of the most common S-100 bus speeds: 2 MHz, 4 MHZ, and 5 MHz. However, at bus speeds in excess of 2 MHz, the 2708 EPROM on the board may not function properly unless a wait state is inserted during fetches to this part. The DJ has been designed to automatically insert ONE wait state in bus cycles which read data or instructions from the 2708 EPROM if paddle 7 of switch 1 is in the 'on' position. If this paddle is in the 'off' position no wait states will be generated during fetches from the 2708 EPROM.

Whenever the Disk Jockey is operating in a system that has a CPU clock speed faster than 2 MHz, paddle 7 of switch 1 MUST be in the 'on' position. If the Disk Jockey is operating with a CPU that is running a 2MHz or slower, paddle 7 of switch 1 MUST be in the 'off' position. This paddle is the second from the top of the LEFT switch at location 5D on the circuit board.

The Disk Jockey controller has the ability to generate addresses on the system S-100 bus when power is first applied or when a system reset is active. This address generating ability will force the CPU to branch to the DBOOT routine on the DJ board so that the system will boot an operating system into memory. There are six paddles on switch 1 at board position 5D which control the power-on jump logic of the controller. Paddle 8, at the top of the switch enables or disables the power-on jump circuitry. The logic is enabled if the paddle is in the 'on' position and disabled if the paddle is in the 'off' position. If the logic is disabled, the settings of the other five paddles are not important. If the logic is enabled, the settings of the rest of the paddles informs the CPU of the starting address of the Disk Jockey controller within a 64K reigon of memory. Since the controller uses 2K of address space which starts on a 2K boundary, it is necessary to specify the 5 high order address bits to affect a branch to the controller. The remaining 5 paddles on switch 1 program these 5 high order address bits. These switches are arranged in ascending order:

Paddle 5 programs address bit 11 - on for low, off for high
Paddle 4 programs address bit 12 - on for low, off for high
Paddle 3 programs address bit 13 - on for low, off for high
Paddle 2 programs address bit 14 - on for low, off for high
Paddle 1 programs address bit 15 - on for low, off for high

These paddles occupy the lowest five positions on switch 1 at board position 5D. For a standard DJ board located at E000H (340:000Q), paddles 1, 2, and 3 should be off while paddles 4 and 5 should be on. Below a complete table of switch settings is detailed.

POWER-ON JUMP TABLE

JUMP ADDRESS		SWITCH SETTING				
Octal	Hex	SW1-1 (A15)	SW1-2 (A14)	SW1-3 (A13)	SW1-4 (A12)	SW1-5 (A11)
000:000	0000	on	on	on	on	on
010:000	0800	on	on	on	on	off
020:000	1000	on	on	on	off	on
030:000	1800	on	on	on	off	off
040:000	2000	on	on	off	on	on
050:000	2800	on	on	off	on	off
060:000	3000	on	on	off	off	on
070:000	3800	on	on	off	off	off
100:000	4000	on	off	on	on	on
110:000	4800	on	off	on	on	off
120:000	5000	on	off	on	off	on
130:000	5800	on	off	on	off	off
140:000	6000	on	off	off	on	on
150:000	6800	on	off	off	on	off
160:000	7000	on	off	off	off	on
170:000	7800	on	off	off	off	off
200:000	8000	off	on	on	on	on
210:000	8800	off	on	on	on	off
220:000	9000	off	on	on	off	on
230:000	9800	off	on	on	off	off
240:000	A000	off	on	off	on	on
250:000	A800	off	on	off	on	off
260:000	B000	off	on	off	off	on
270:000	B800	off	on	off	off	off
300:000	C000	off	off	on	on	on
310:000	C800	off	off	on	on	off
320:000	D000	off	off	on	off	on
330:000	D800	off	off	on	off	off
340:000	E000	off	off	off	on	on
350:000	E800	off	off	off	on	off
360:000	F000	off	off	off	off	on
370:000	F800	off	off	off	off	off

CABLE CONNECTIONS

Drives on Discus systems are connected in daisy chain fashion to the controller board, as illustrated below.

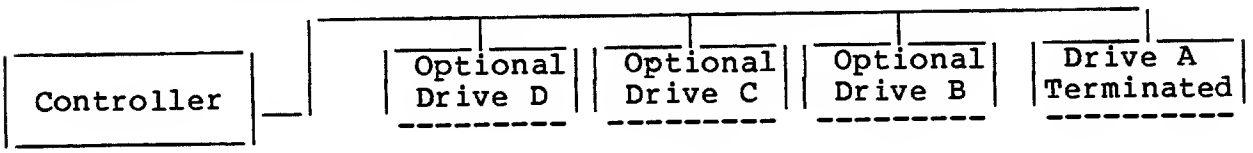

As can be seen from the above figure, Drive A is located at one end of the cable and is the only terminated drive on the cable. The location of any additional drives on the cable is not important as long as they are not at the end of the cable. Again, extra drives are not terminated.

Aside from termination, the only physical difference between an "A" and a "B" drive, or between any two differently addressed drives,is the jumper strapping on the PC board of the drives. Strapping a drive for termination and drive selection is documented in the manual which accompanies the drive.

Four different daisy chain cables are available for one, two, three or four drive systems. A daisy chain cable is simply a parallel cable. Not all available connectors on a multiple drive cable need be filled for the system to function. Also, a dual system with drives addressed, say, as "A" and "C" would work fine as long as the operator remembered to refer to the second drive as "C" rather than "B". In other words, the absence of a "B" drive in no way "locks out" the "C" and "D" drives.

The following rule applies to all cable configurations supplied by Morrow Designs:

> The 50 pin flat ribbon cable provided with the Discus system should be connected to the Disk Jockey controller board so that the cable extends out over the solder side of the PC board-- not the component side.
>
> Whichever end of the 50 pin flat ribbon cable is chosen to plug into the controller board, that side of the cable which is on the LEFT (closer to the heat sink) as it connects to the controller should be UP as it connects to each and every drive on the system. Thus, P1 pin 50 on the DJ controller board should come in to each disk drive via the top part of the male 50 pin connector attached to the cabinet of each drive. If the LED on the front of the drive comes on upon power up, the cable is on backwards and should be reversed. The LED on the front of the drive should light up only when a command has been issued to load the head.
>
> Any visual "key" such as an arrow or triangle on a connector should be used solely as an aid in implementing the connection scheme described above.

BAUD RATE SELECTION

Paddles 1 to 4 of Switch 2 at the right side of the DJ control the baud rate for the 1602 UART. Sixteen separate baud rates, ranging from 50 to 19,200, are available. The following table lists all possible switch settings for baud rate selection.

BAUD RATE SWITCH SETTINGS

SW2-1	SW2-2	SW2-3	SW2-4	BAUD RATE
on	on	on	on	50
on	on	on	off	75
on	on	off	on	110
on	on	off	off	134.5
on	off	on	on	150
on	off	on	off	300
on	off	off	on	600
on	off	off	off	1200
off	on	on	on	1800
off	on	on	off	2000
off	on	off	on	2400
off	on	off	off	3600
off	off	on	on	4800
off	off	on	off	7200
off	off	off	on	9600
off	off	off	off	19200

WORD LENGTH

Paddle 5 of Switch 2 controls data word length selection for the 1602 UART. Placing paddle 5 in the "on" position sets the word length to 7 bits, while "off" fixes the word length to 8 bits. The table below gives the word length selection settings for the DJ.

WORD LENGTH SELECTION

SW2-5	WORD LENGTH
"on"	7 BITS
"off"	8 BITS

STOP BIT COUNT

SW2-6 controls the number of stop bits, either one or two, which the UART sends after each data word. The "off" position will set the device to two stop bits, and the "on" position to one.

Most devices are extremely tolerant concerning stop bit setting. As a general rule, if a device fails to communicate with the Disk Jockey, it is not because the stop bit setting is incorrect.

STOP BIT COUNT SELECTION

SW2-6	STOP BIT COUNT
"on"	1 STOP BIT
"off"	2 STOP BITS

PARITY

If paddle 8 of switch 2 is in the "off" position, the UART will not generate any parity bits at the end of the serial data word. If the paddle is in the "on" position, refer to the table below for the proper parity setting via paddle 7.

PARITY SWITCH SETTING

SW2-7	PARITY
"on"	ODD PARITY
"off"	EVEN PARITY

FAST REFERENCE FOR DJ2D DIP SWITCHES

Power-on-jump Switch

on	off		
	8	-"on" enables POJ	
	7	-"on" for 4 MHz	
	6	-"on" for PHANTOM	
SW1	5	-ADDR 11	"on" for 0 address bits
	4	-ADDR 12	
	3	-ADDR13	"off" for 1 address bits
	2	-ADDR 14	
	1	-ADDR 15	

5D

UART Switch

on	off		
	8	-"on"= parity/"off"=no	
	7	-"on"= odd/"off"=even	
	6	-"on"= 1 stop bits	
	5	-"on"= 7 bits/"off"=8	
SW2	4	-$\overline{A}$	low order bit
	3	-B	Baud Rate Selection "on" = 0 bit
	2	-C	
	1	-D	high order bit

13C

[ ]	1	5" x 10" printed circuit board w/solder mask & legend	
[ ]	1	180 Ohm 1/4 watt 5% resistor	brown-grey-brown
[ ]	2	240 Ohm 1/4 watt 5% resistor	red-yellow-brown
[ ]	1	330 Ohm 1/4 watt 5% resistor	orange-orange-brown
[ ]	2	470 Ohm 1/4 watt 5% resistors	yellow-purple-brown
[ ]	2	560 Ohm 1/4 watt 5% resistors	green-blue-brown
[ ]	1	750 Ohm 1/2 watt 5% resistor	purple-green-brown
[ ]	8	1k Ohm 1/4 watt 5% resistors NOTE: On early versions of the silk screened legend on the circuit board, a 3.3k Ohm resistor is shown just to the right of IC 6300 at board position 8C. This is an error. This should be a 1k Ohm resistor.	brown-black-red
[ ]	1	1.5k Ohm 1/4 watt 5% resistor	brown-green-red
[ ]	5	3.3k Ohm 1/4 watt 5% resistors	orange-orange-red
[ ]	3	4.7k Ohm 1/4 watt 5% resistors	yellow-purple-red
[ ]	2	6.19k Ohm 1/8 watt 1% resistors	blue-brown white-brown
[ ]	2	10k Ohm 1/4 watt 5% resistors	brown-black-orange
[ ]	1	18.2k Ohm 1/8 watt 1% resistor	brown-grey-red-red
[ ]	1	20.5k Ohm 1/8 watt 1% resistors	red-black-green-red
[ ]	2	27k Ohm 1/4 watt 5% resistors	red-purple-orange
[ ]	1	47k Ohm 1/4 watt 5% resistor	yellow-purple-orange
[]	1	54.9k Ohm 1/8 watt 1% resistor	green-yellow-white-red
[ ]	1	86.6k Ohm 1/8 watt 1% resistor	white-blue-blue-red
[ ]	4	1M Ohm 1/4 watt 5% resistors	brown-black-green
[ ]	1	180 Ohm 1/8 watt 5% 9 resistor SIP array	SIP3
[ ]	1	1k Ohm 1/8 wattt 5% 9 resistor SIP array	SIP1
[ ]	2	3.3k Ohm 1/8 watt 5% 9 resistor SIP array	SIP2,SIP4
[ ]	3	33 picofarad 5% silver mica capicators	

[ ]	2	47 picofarad 2% silver mica capicator	
[ ]	2	112 picofarad 2% silver mica capicator	
[ ]	1	470 picofarad 5% silver mica capicator	
[ ]	1	.001 microfarad ceramic disk capicator	
[ ]	1	.01 microfarad mylar capicator	
[ ]	3	1.0 - 2.0 microfarad dipped tantalum capicator	
[ ]	6	1.0 - 4.7 microfarad axial lead tantalum capicators	
[ ]	2	39 microfarad axial lead tantalum capicators	
[ ]	16	ceramic disk capicators - may vary in value from .01 to .1 microfarads depending on current supplies	
[ ]	1	Dual-in-line 50 conductor right angle header	P1
[ ]	1	Single-in-line 7 conductor right angle header	P2
[ ]	1	3-pin header	
[ ]	1	2-pin header	
[ ]	1	Heat sink for the 7805 regulator at bottom of board	
[ ]	4	6-32 5/16 pan head machine screws	
[ ]	4	6-32 1/4" hex machine nuts	
[ ]	1	5.0688 MHz HU/18 Crystal	
[ ]	1	10.0000 MHz HU/18 Crystal	
[ ]	2	8 position DIP switch arrays	5D,13C
[ ]	1	1N751A 5.1 volt Zener diode	
[ ]	8	1N914/4820-0201 signal diodes NOTE: The silk screened legend on the circuit board shows a group of four diodes just above the 1791/8866 controller at position 14C on the circuit board. These parts are not to be installed and are not furnished with the kit. These parts go with a version of the 1791 controller that Western Digital is not presently making.	
[ ]	1	RL209 light emitting diode	
[ ]	2	2N3904 transistor	

[ ]	2	2N3906 transistor	
[ ]	1	8 pin low-profile socket	
[ ]	15	14 pin low-profile sockets	
[ ]	13	16 pin low-profile sockets	
[ ]	3	18 pin low-profile sockets	
[ ]	7	20 pin low-profile sockets	
[ ]	1	24 pin low-profile socket	
[ ]	2	40 pin low-profile sockets	
[ ]	2	74LS00 quad 2-input NAND gate	2A, 3B
[ ]	1	74LS02 quad 2-input NOR gate	3A
[ ]	1	74LS04/LS14 hex inverter	5C
[ ]	1	7404 hex inverter	2C
[ ]	1	74LS08 quad 2-input AND gate	7B
[ ]	1	74LS10 triple 3-input NAND gate	7A
[ ]	1	74LS30 8-inpur NAND gate	7C
[ ]	1	74LS32 quad 2-input OR gate	4C
[ ]	1	7438/LS38 quad 2-input NAND buffer	8B
[ ]	5	74LS74 dual D type flip-flop	4A,5A,6A,8A,2B
[ ]	1	74LS155 dual 1 of 4 decoder	6B
[ ]	1	74160/LS160/74161/LS161 4 bit counter	6C
[ ]	1	74175/LS175 4 bit dual rail register	9B
[ ]	1	74LS221 dual monostable	2D
[ ]	1	74LS240 octal tri-state inverting buffer	10D
[ ]	2	74LS244 octal tri-state buffer	6D,8D
[ ]	1	7473/LS273 octal latch	12C
[ ]	1	74367/LS367 hex tri-state buffer	13B
[ ]	4	74368/LS368 tri-state inverting buffer	10B,11B,4D,12B

[ ]	1	74LS373 octal tri-state buffer/latch	7D
[ ]	1	74390/LS390 dual decade counter	3C
[ ]	1	81LS96/LS98 octal tri-state inverting buffer	9D
[ ]	1	25LS2521 octal comparator	11C
[ ]	1	96LS02 dual monostable	4B
[ ]	1	MMI6300/6301/82S129/74S287 4 x 256 PROM	8C
[ ]	1	MMI6331/82S123/74S288 8 x 32 PROM	3D
[ ]	1	2708 8 x 1k EPROM	11D
[ ]	2	2114-3L 4 x 1k low power 300NS static RAM	9C,10C
[ ]	1	BR1941/2941/COM5016 dual baud rate generator	13D
[ ]	1	TR1602/TR1868/MB8866 Uart	14D
[ ]	1	FD1791/8866 dual density floppy disk controller	14B
[ ]	1	1448/4558 dual operational amplifier	1C
[ ]	1	7812/78M12 monolithic 12 volt .5 amp regulator	
[ ]	1	79L05 monolithic -5 volt 100 ma regulator	
[ ]	1	7912/79M12 monolithic -12 volt regulator	

WARNING! IMPROPER ASSEMBLY OF THIS KIT WILL VOID THE WARRANTY. READ THESE INSTRUCTIONS CAREFULLY BEFORE ATTEMPTING TO CONSTRUCT THIS KIT

INVENTORY

Make sure that all parts listed in the Parts List have been included. Notify Morrow Designs immediately if any are missing. Also, quickly return all extra parts.

USE BENDING BOARD

With the exception of the axial tantalum capacitors, the 1N751A zener diode, one of the 1/4 watt 240 Ohm resisters, and the 1/2 watt 750 Ohm resistors, all the resistor and diode leads should be bent to .4 inches. The leads of the 750 Ohm resistors should have a spacing of .55 inches. The axial lead tantalum capacitors should be bent to .7 inches. Use of a bending block will give your finished kit a more professional look.

USE SOCKETS

Sockets are provided for every IC on the Disk Jockey.

NO REPAIR WORK WILL BE ATTEMPTED ON ANY RETURNED BOARD WITH ANY IC SOLDERED DIRECTLY TO THE CARD

ORIENTATION

When this manual refers to the bottom of the circuit board it means the side with the gold S-100 edge connectors. Right and left assume a view from the component side of the board which has the silk screen legend.

All IC sockets will either have their pins numbered, have a 45 degree angle across the corner of pin one, or have a deep groove at the top of the socket. On the Disk Jockey, all sockets and all IC's have pin 1 closest to the top left corner of the board.

The tantalum capacitors are polarized. The dipped tantalum cap has a red dot at its positive lead. This lead should be inserted at the side of the oval legend where the "+" sign is located. The 1.0 microfarad capacitor's positive lead is identified by a circular "tit" where it enters the body of the housing. The positive end of the 39 microfarad capacitors is identified by a red band. The silk screen identifies the positive lead of these axial parts with a "+" sign. The by-pass caps, identified on the silk screened legend by an asterisk "*" enclosed by a box, are not polarized. The .01 mylar cap and the

The two DIP switch arrays are to be positioned so that switch paddle number 1 is toward the bottom of the board.

The SIP resistor packs, historically prone to being inserted backwards, should have their white dot nearest the white dot on their respective legends. For SIP2 and SIP4 this means that the white dot should point toward the top of the board. For SIP1, the white dot should point to the left and for SIP3, the dot will point to the right.

The crystals included in this kit have a piece of foam pad attached to their PC board side. When these parts are installed, the protective paper on the back of the pad should be peeled off just before the leads are inserted through the circuit board at the position indicated on the parts legend. The foam pad has an adhesive on it which will hold the crystal to the circuit board. The pad and the adhesive are insulators so that no short circuit can occur when the crystal is installed.

The orientation of the transistors is indicated on the silk screen legend of the circuit board, as is their type number. A very common cause of smoke on power-up is a 2N3906 correctly oriented in the place of a 2N3904 and vice versa.

The black band at one end of the diodes marks the cathode and should correspond to the white arrow point on the legend of the circuit board.

Placing the 50 pin flat cable connector, P1, upside down is a disaster. The angled pins should go through the circuit board. Only the longer straight pins are long enough to accept the ribbon cable to the disk drive. The I/O connector, P2, should be positioned so that the longer angled pins point toward the top of the board while the shorter straight pins go through the circuit board.

EXAMINE THE BOARD

Visually examine the circuit board for any trace opens or shorts. A concentrated five minute scrutiny will uncover most trace defects. Several hours of scattered, unconcentrated scrutiny generally won't reveal anything. Take special care that no shorts or opens exist on those areas of the circuit board that will be covered by IC sockets. Ohm out any suspicious looking traces for either shorts or discontinuity as appropriate. Return immediately any bare board found to be flawed. Such boards will be replaced under warranty.

SOLDERING AND SOLDER IRONS

The most desirable soldering tool for complex electronic kits is a constant temperature iron with an element regulated at 650 degrees F. The tip should be fine so that it can be brought into close contact with the pads of the circuit board. Such irons are available from Weller and Unger and should be part of any electronics shop.

There are three important soldering requirements for building this kit:

1. Do not use an iron that is too cold (less than 600 degrees F) or too hot (more than 750 degrees F).
2. Do not hold the iron against a pad for more than about six seconds.
3. Do not apply excessive amounts of solder.

The recommended procedure for soldering components to the circuit board is as follows:

1. Bring the iron in contact with BOTH the component lead AND the pad.
2. Apply a SMALL amount of solder at the point where the iron, component lead, and pad ALL make contact.
3. After the initial application of solder has been accomplished with the solder flowing to the pad and component lead, the heat of the iron will have transferred to BOTH the pad AND lead. Apply a small amount of additional solder to cover the joint between the pad and the lead.

DO NOT PILE SOLDER ON THE JOINT! EXCESSIVE HEAT AND SOLDER CAUSE PADS AND LEADS TO LIFT FROM THE CIRCUIT BOARD. EXCESSIVE SOLDER IS THE PRIMARY CAUSE FOR BOARD SHORTS AND BRIDGED CONNECTIONS.

[ ] Install and solder the eight signal diodes (1N914 or equivalent) and clip the excess leads from the parts. Be sure that the black bands of the diodes are positioned to match the arrow points of the white legend of the circuit board.

[ ] Install, solder, and trim the 1N751A zener diode.

PROTECT YOUR EYES WHEN YOU CLIP COMPONENT LEADS AFTER SOLDERING

[ ] Install and solder all the 1/4 watt resistors in place. Do this in sections so that the leads can be conveniently clipped.

[ ] Install, solder, and trim the leads of the 1% precision resistors.

[ ] Next, install, solder and trim the leads of the 750 Ohm 1/2 watt resistor.

[ ] Install and solder the 40 pin sockets first, then the 24, 20, 18, 16, and 14 pin sockets in that order. Finally install and solder the 8 pin socket. By installing the sockets in this order, a smaller sized socket will never be placed in a larger sized position.

[ ] Install and solder the SIP resistor pack arrays. The top pack at the left should have its dot to the left. The top pack at the right should have its dot to the right. The two packs at the center and at the bottom of the board should have their dots pointing toward the top of the board.

[ ] Install and solder the 6 axial lead 1.0 microfarad capicators. The top two have their "+" leads to the left. The next pair have their "+" leads to the right and the final two will have their "+" leads pointing to the left again. Clip the excess leads from the parts.

[ ] Install, solder, and clip the leads of the two 39 microfarad caps. The red band of these parts must point to the left.

[ ] Bend the leads of the 7812, 7912, and one of the 7805 regulators. Set the other 7805 aside for now. Install the top three regulators at the left hand side of the board by placing a nut on top of the regulator, insert a screw from the bottom of the circuit board through the hole of the board and through the hole of the regulator. Hand tighten the nut. Solder the leads. Tighten the screws firmly.

[ ] After bending the leads 90 degrees, install and solder the two crystals in place. Clip the excess leads. Fix them to the circuit board by peeling the protective paper off their foam pad and pressing the pad against the board. Be sure to solder the crystals into place so that their padded side will fall into the area outlined on the silk screened legend.

[ ] Install and solder the two connectors P1 and P2. Be sure to reread the orientation section before installing these parts.

[ ] Install and solder the light emitting diode at the top of the board just to the left of P1. One of the leads of this diode is longer than the other. The longer lead is the anode and must be to the left when the part is inserted. Clip the excess leads after soldering.

[ ] Install, solder and clip the leads of the 1.5 dipped tantalum capicators. A total of three are to be installed. One is just to the right of the 7805 regulator in upper left corner of the board. The red dot of this device is to point to the left. The rest have their dots pointing toward the top of the board. There is one to the right of the 1791/8866 IC at position 14B, and another to the left of the 1602 IC at position 14D.

[ ] Install, solder and clip the 33 picofarad silver mica cap just to the right of the 10 Meg crystal in the left side of the board.

[ ] Install, solder and clip the leads of the 47 and 112 picofarad silver mica caps just to the left of the 74LS123 IC at location 2D.

[ ] Install, solder and clip the two 33 picofarad silver mica caps-- one between the 74LS10 IC at 7A and the 74LS74 IC at 8A and the other between the 6631 IC at 3D and the 74LS367 IC at 4D.

[ ] Install, solder and clip the 470 picofarad mica cap at the upper left of the 7404 IC at location 2C.

[ ] Install, solder and clip the .001 microfarad disk cap to the left of the 10 MHz crystal.

[ ] Install, solder and clip the .01 microfarad mylar cap to the left of the .001 disk cap just installed.

[ ] Install, solder and clip the leads of the three transistors just to the right of the regulator area carefully observing the placement and orientation information silk screened on the circuit board.

[ ] Install and solder the two DIP switch arrays. Switch 1 of each DIP should be positioned toward the bottom of the board.

[ ] Install, solder, and clip the leads of the 16 by-pass capacitors whose positions are identified by rectangular boxs each with asterisk "*" in the middle.

[ ] Bend the leads of the remaining 7805 regulator and insert it in the circuit board. Place a separate, finned heat sink between the regulator and the board, work a screw from the back of the board through the board, heat sink, and regulator and hand tighten into the nut on top of the regulator. Solder the leads and adjust the wings of the separate heat sink and, finally, tighten the screw.

CLEAN AND EXAMINE THE BOARD

Use flux cleaner to remove solder rosin residue. Examine the circuit board carefully for shorts, solder bridges, or missed pins.

HOW TO FIND WHERE TO PLACE PARTS

For parts placement, please see the silk screened legend on the printed circuit board.

IC's may vary from those marked on the silk screened legend if they are listed as alternate IC's (following a slash) in the Parts List.

DO NOT INSERT ANY IC'S IN THEIR SOCKETS AT THIS TIME

INITIAL CHECK-OUT AND POWER-UP

Before inserting any IC's in their sockets perform the following check-out procedure:

1. Re-check the back of the board for solder shorts and bridged connections and for pins of IC sockets that have not been soldered. These unsoldered pins can cause aggravating intermittant probems during check-out.

2. Re-check components for orientation and make sure all components to be soldered have been soldered.

3. With an ohm meter, check for shorts between all regulated voltages (+5V,-5V,+12V,-12V) and ground and between any two regulator outputs (all regulator output pins are on the right side of the regulator, towards the bottom of the circuit board in this case). Check for shorts between S-100 supply voltages (+8V,+16V, -16V) and ground. S-100 pins 1 and 51 hold 8 volts, pin 2 holds +16 volts, and pin 52 -16 volts. Ground is on S-100 pins 50 and 100. Check these voltages for shorts amoung each other.

4. Place the board WITHOUT IC's into an empty system bus slot and power up. In case of smoke, power down immediately and investigate.

5. With a VOM or scope, check the regulators for +5V (both of the 7805's), +12V, and -12V. The bottom pin of all four regulators is the output. Check for Vcc and ground on all IC's. Check for +12V on the 1791/8866 controller, the 2941 baud rate generator, and the 1458/4558 op amp. Check for -12V on the 1602 UART and the 1458/4558 op amp. Finally, check for -5V on the 2941 baud rate generator. If everything is OK, power down and proceed to the next step.

IC INSERTION

If an IC insertion tool is not available, IC leads should be straightened a ROW at a time, not by the individual PIN. The edge of a straight sided table is an excellent device for this operation. Hold the IC by the plastic case, place one row of legs against a flat surface and push very slightly. Repeat with the opposite row. Continue this procedure until the legs of the IC can be inserted with minimum effort into its socket.

When inserting an IC into its socket, take care that you DO NOT BEND THE IC'S LEGS UNDERNEATH ITS PLASTIC PACK. This is an extremely common error and can escape even a fairly careful visual inspection.

If IC pins become bent under during insertion, use a long nose pliers to straighten them and try again. When removing an IC from its socket, use an IC remover, an IC test clip (another must for any electronics shop) or a miniature screw driver. DO NOT ATTEMPT TO REMOVE AN IC WITH YOUR FINGERS. You will bleed on severely bent pins.

Once all IC's have been inserted, re-check for bent pins. Then check twice for proper orientation. Upside down IC's are generally destroyed upon power up.

IF FOR ANY REASON IT BECOMES NECESSARY TO REMOVE A COMPONENT WHICH HAS BEEN SOLDERED TO THE CIRCUIT BOARD, CLIP ALL LEADS BEFORE REMOVING. THIS WILL REDUCE THE CHANCE OF LIFTING PADS OFF TRACES.

POWER UP

If all previous checks have been performed, you are ready to put power to your fully populated board. In an empty system with power off, insert the Disk Jockey and power up. If the board smokes, power down and investigate. If not, measure the regulated voltages again.

If any voltages have been lost since powering up the bare board, power down and check for upside down IC's. Isolate the possible faulty chip or chips by powering down, removing a section of IC's, and powering up again. Continue this sequence until the faulty IC or IC's are found.

BE SURE NEVER TO INSERT OR REMOVE A BOARD WITH POWER ON! THIS MAY DAMAGE THE BOARD

This completes the initial check-out of your Disk Jockey. If there are any problems or questions regarding the operation of your Disk Jockey contact the service department of Morrow Designs, (415) 524-2104.

DJ/2D MODEL B MEMORY MAP

HEX ADDRESS	FUNCTION		OCTAL ADDRESS
E000-E3F7	ROM FIRMWARE		340:000-343:367
	I/O REGISTERS		
	WHEN READ	WHEN WRITTEN	
E3F8	UART INVERTED DATA INPUT	UART INVERTED DATA OUTPUT	343:370
E3F9	UART INVERTED STATUS	DISK JOCKEY FUNCTION	343:371
E3FA	DISK JOCKEY STATUS	DRIVE CONTROL REGISTER	343:372
E3FB	NOT USED	NOT USED	343:373
E3FC	1791 CONTROLLER STATUS	1791 CONTROLLER COMMAND	343:374
E3FD	1791 TRACK REGISTER		343:375
E3FE	1791 SECTOR REGISTER		343:376
E3FF	1791 DATA REGISTER		343:377
E400-E7FF	RAM		344:000-347:377

SOFTWARE LISTINGS

Morrow Designs makes no representations or warranties with respect to the contents hereof and specifically disclaims any implied warranties of merchantability or fitness for any particular purpose. Futher, Morrow Designs reserves the right to revise this publication and to make changes from time to time in the content hereof without obligation of Morrow Designs to notify any person of such revision or changes.

```
                ;*************************************************************
                ;*                                                           *
                ;* Boot loader program for cp/m. The following code is       *
                ;* loaded by the boot program on the Disk Jockey 2D. The     *
                ;* 2D loads sector one of track zero into memory at          *
                ;* ORIGIN+300H (the last page of ram on the controller)      *
                ;* then jumps there. It is the responsibility of this code   *
                ;* to load in the rest of cp/m.                              *
                ;*                                                           *
                ;*************************************************************

2900 =          CPMORG  EQU     2900H   ;CPM STARTING ADDRESS
E000 =          ORIGIN  EQU     0E000H  ;Disk Jockey starting address
E400 =          RAM     EQU     ORIGIN+400H     ;ram starting address (of 2D)
E640 =          STACK   EQU     RAM+240H        ;stack pointer starting address within ram
E009 =          TKZERO  EQU     ORIGIN+11Q      ;track zero seek entry point
E00C =          TRKSET  EQU     ORIGIN+14Q      ;entry for track seek
E00F =          SETSEC  EQU     ORIGIN+17Q      ;entry point for sector set
E012 =          SETDMA  EQU     ORIGIN+22Q      ;enrty address for read/write beginning address
E015 =          DREAD   EQU     ORIGIN+25Q      ;disk read entry point
E018 =          DWRITE  EQU     ORIGIN+30Q      ;disk write routine address
E024 =          DMAST   EQU     ORIGIN+44Q      ;disk read/write status routine

E700                    ORG     ORIGIN+700H

                ;*************************************************************
                ;*                                                           *
                ;* load: load in all the rest of cp/m and the cbios. There   *
                ;*       are only two ways to exit this code: 1) If an       *
                ;*       error occurs, a jump is made to the loader on the   *
                ;*       Disk Jockey 2D. 2) If everything works, a jump is   *
                ;*       made to the starting location of the cold boot in   *
                ;*       the cbios.                                          *
                ;*                                                           *
                ;*************************************************************

E700 21003E     LOAD    LXI     H,CPMDRG+1500H  ;starting location for cbios
E703 3140E6             LXI     SP,STACK        ;initialize the stack
E706 E5                 PUSH    H       ;save jump address for return later
E707 01022E     STADDR  LXI     B,2E02H ;reg B=sector count, reg C=starting sector
E70A C5                 PUSH    B       ;save sector and count
E70B CD0FE0             CALL    SETSEC  ;set the sector to read
E70E CD09E0             CALL    TKZERD  ;home the drive
E711 210029             LXI     H,CPMORG        ;starting location for load
E714 44         LDLOOP  MOV     B,H     ;put starting address in B&C
E715 4D                 MDV     C,L
E716 CD12E0             CALL    SETDMA  ;set up starting load address
E719 060A               MVI     B,10    ;retry counter
E71B C5         RDLOOP  PUSH    B       ;save retry count
E71C CD15E0             CALL    DREAD   ;read in the sector
E71F C1                 POP     B       ;fetch retry count
E720 D22AE7             JNC     RDGDDD  ;take jump if read is ok.
E723 05                 DCR     B       ;update retry counter
E724 C21BE7             JNZ     RDLOOP  ;try again if not ten errors
E727 C300E0     EXIT    JMP     ORIGIN  ;start all over from the beginning
E72A C1         RDGOOD  PDP     B       ;refetch sector count and #
E72B 05                 DCR     B       ;update the count
E72C C8                 RZ              ;GO TO CPM IF DONE
E72D 0C                 INR     C       ;COMPUTE NEW SECTOR (MOD 26)
E72E 3E1B               MVI     A,27    ;test if over 26
E730 B9                 CMP     C
E731 C236E7             JNZ     OK      ;take jump if sector < 27
E734 0E01               MVI     C,1     ;start with sector 1 of next track
E736 C5         DK      PUSH    B       ;save count and sector
E737 CC0CE0             CZ      TRKSET  ;conditionally set new track
E73A C1                 POP     B       ;restore count and sector #
E73B C5                 PUSH    B       ;save it again
E73C CD0FE0             CALL    SETSEC  ;set new sector
E73F CD24E0             CALL    DMAST   ;get load address
E742 218000             LXI     H,200Q  ;update te load address
E745 09                 DAD     B
E746 C314E7             JMP     LDLOOP  ;read next sector
```

```
                ************************************************************
                *                                                          *
                * save: write all of cpm and the cbios onto the disk.      *
                *       If an error occurs, the status reurrned by the     *
                *       2D controller will be in location STACK-1.         *
                *                                                          *
                ************************************************************

E749 2118E0     SAVE    LXI     H,DWRITE        ;change load to write instead of read
E74C 221DE7             SHLD    RDLOOP+2
E74F 215EE7             LXI     H,ERROR ;change error return address
E752 2220E7             SHLD    EXIT+1
E755 215BE7             LXI     H,STALL ;get return address
E758 C303E7             JMP     LOAD+3  ;go and do the write
E75B C35BE7     STALL   JMP     STALL   ;stop here if everything ok !
E75E F5         ERROR   PUSH    PSW     ;save status and flags
E75F C35FE7     ERROR1  JMP     ERROR1  ;stop here on error.

                ************************************************************
                *                                                          *
                * intlz: write this cold boot loader program out to the    *
                *        disk.                                             *
                *                                                          *
                ************************************************************

E762 3140E6     INTLZ   LXI     SP,STACK        ;set up stack
E765 CD09E0             CALL    TKZERO  ;home the drive
E768 0100E7             LXI     B,RAM+300H      ;get starting address of this program
E76B CD12E0             CALL    SETDMA  ;set the write address
E76E 0E01               MVI     C,1     ;set the sector to write
E770 CD0FE0             CALL    SETSEC
E773 CD18E0             CALL    DWRITE  ;write this program out
E776 DA5EE7             JC      ERROR
E779 C379E7     DONE    JMP     DONE    ;stop here
```

```
                ;*************************************************************
                ;*                                                           *
                ;* CBIOS DRIVERS FOR CPM                                     *
                ;*                                                           *
                ;* Currently the cbios is set up for a 16K cpm, to make a    *
                ;* larger system, change the value of CPM.                   *
                ;*                                                           *
                ;*************************************************************

2900 =          CPM     EQU     2900H   ;cp/m beginning load address
3106 =          ENTRY   EQU     CPM+806H        ;cp/m entrance point
0004 =          CDISK   EQU     4       ;current disk storage location
0003 =          IOBYTE  EQU     3H      ;iobyte storage location

                ;*************************************************************
                ;*                                                           *
                ;* Iobyte allows selection of different I/O devices. It      *
                ;* can be initialized in any way by changing the equate      *
                ;* bellow.                                                   *
                ;* Initial iobyte is currently defined as :                  *
                ;* console = tty                                             *
                ;* reader = tty                                              *
                ;* punch = tty                                               *
                ;* list = tty                                                *
                ;*                                                           *
                ;*************************************************************

0000 =          INTIOBY EQU     0       ;initial iobyte,

                ;*************************************************************
                ;*                                                           *
                ;* The following equates reference the disk jockey/2d        *
                ;* controller board. If your controller is non-standard      *
                ;* then all the equates can be changed by re-assigning the   *
                ;* value of ORIGIN to be the starting address of your        *
                ;* controller.                                               *
                ;*                                                           *
                ;*************************************************************

E000 =          ORIGIN  EQU     0E000H  ;disk jockey/2d beginning address
E003 =          INPUT   EQU     ORIGIN+3        ;serial input routine
E006 =          OUTPUT  EQU     ORIGIN+6        ;serial output routine
E009 =          TKZERO  EQU     ORIGIN+9H       ;track zero seek routine
E00C =          SEEK    EQU     ORIGIN+0CH      ;regular track seek routine
E00F =          SECTOR  EQU     ORIGIN+0FH      ;set sector routine
E012 =          DMA     EQU     ORIGIN+12H      ;read/write beginning address set
E015 =          DISKR   EQU     ORIGIN+15H      ;disk read routine
E018 =          DISKW   EQU     ORIGIN+18H      ;disk write routine
E01B =          SELECT  EQU     ORIGIN+1BH      ;disk selection routine
E021 =          TSTAT   EQU     ORIGIN+21H      ;serial device status routine
E640 =          STACK   EQU     ORIGIN+640H     ;disk jockey/2d ram area for boot only
0099 =          SEKERR  EQU     99H     ;seek error bit mask
00FF =          RWERR   EQU     0FFH    ;read/write error bit mask
000D =          ACR     EQU     0DH     ;carriage return
000A =          ALF     EQU     0AH     ;line feed
E006 =          COTTY   EQU     OUTPUT  ;default character output
E003 =          CITTY   EQU     INPUT   ;default character input

                ;*************************************************************
                ;*                                                           *
                ;* The jump table immediately below must not be altered.     *
                ;* It is ok to make the jumps to other address, but the      *
                ;* function performed must be the same.                      *
                ;*                                                           *
                ;*************************************************************

3E00                    ORG     CPM+1500H

3E00 C32D3E     START   JMP     BOOT    ;cold boot
3E03 C3603E             JMP     WBOOT   ;warm boot
3E06 C3C03E             JMP     CONST   ;console status
3E09 C3CC3E             JMP     CONIN   ;console input
3E0C C3DE3E     CPOUT   JMP     CONOUT  ;console output
3E0F C3F93E             JMP     LIST    ;list output
3E12 C3EE3E             JMP     PUNCH   ;punch output
3E15 C3E43E             JMP     READER  ;reader input
3E18 C3713E             JMP     HOME    ;track zero home
3E1B C31BE0             JMP     SELECT  ;disk selection
3E1E C39B3E             JMP     SETTRK  ;track seek
3E21 C30FE0             JMP     SECTOR  ;sector select
3E24 C312E0             JMP     DMA     ;read/write address select
3E27 C3A13E             JMP     READ    ;disk read
3E2A C3BA3E             JMP     WRITE   ;disk write
```

```
                ****************************************
                *                                      *
                * boot: load in all of cpm and then    *
                *       jump there. Initialize iobyte. *
                *                                      *
                ****************************************

3E2D 3140E6     BOOT    LXI     SP,STACK        ;initial stack
3E30 3E00               MVI     A,INTIOBY       ;initialize iobyte
3E32 320300             STA     IOBYTE
3E35 21643F             LXI     H,PROMPT        ;print signon message
3E38 CD8E3E             CALL    MESSG
3E3B AF                 XRA     A       ;select disk A
3E3C 320400             STA     CDISK
3E3F 018000     GOCPM   LXI     B,80H   ;set up default disk buffer
3E42 CD12E0             CALL    DMA
3E45 3EC3               MVI     A,0C3H  ;put jump instruction to warm boot at 0
3E47 320000             STA     0
3E4A 21033E             LXI     H,START+3
3E4D 220100             SHLD    1
3E50 320500             STA     5       ;put jump to cpm entry at 5
3E53 210631             LXI     H,ENTRY
3E56 220600             SHLD    6
3E59 3A0400             LDA     CDISK   ;jump to cpm with current disk in C
3E5C 4F                 MOV     C,A
3E5D C30029             JMP     CPM
                ************************************************************
                *                                                          *
                * warm boot: load in all of cpm except the cbios. Then     *
                * enter cpm.                                               *
                *                                                          *
                ************************************************************

3E60 3140E6     WBOOT   LXI     SP,STACK        ;initialize the stack
3E63 AF                 XRA     A       ;select drive A
3E64 4F                 MOV     C,A
3E65 CD1BE0             CALL    SELECT
3E68 01022A             LXI     B,2A02H ;sector count and beginning sector
3E6B CD0AE7             CALL    ORIGIN+70AH     ;call the cold start loader
3E6E C33F3E             JMP     GOCPM   ;now enter cpm

                ************************************************************
                *                                                          *
                * Home: move the head to track zero.                       *
                *                                                          *
                ************************************************************

3E71 CD09E0     HOME    CALL    TKZERO  ;call the disk jockey/2d
3E74 0E99       SEEK1   MVI     C,SEKERR        ;non relevent error mask

                ************************************************************
                *                                                          *
                * doerrs: returns if no error. Otherwise prints an appro- *
                * priate error messgae, and returns to cpm with an error   *
                * indication.                                              *
                *                                                          *
                ************************************************************

3E76 DA7B3E     DOERRS  JC      DOERR1  ;test if errror
3E79 AF         RWOK    XRA     A       ;return if ok
3E7A C9                 RET
3E7B A1         DOERR1  ANA     C       ;strip off unwanted errors
3E7C 0E08               MVI     C,8     ;error counter
3E7E 217A3F             LXI     H,MSGTBL        ;beginning address of messages
3E81 5E         DOLOOP  MOV     E,M'    ;get error address in D&E
3E82 23                 INX     H
3E83 56                 MOV     D,M
3E84 23                 INX     H
3E85 1F                 RAR             ;check if this bit is the error
3E86 DA8D3E             JC      MESSGA  ;yes, exit after printig error
3E89 0D                 DCR     C       ;no error, update the count down
3E8A F2813E             JP      DOLOOP  ;continue if not found

                *
                * if fall through then unknown error
                *

3E8D EB         MESSGA  XCHG            ;put message address into H&L
```

```
                ;*************************************************************
                ;*                                                           *
                ;* messg: print the messgae pointed to by H&L and termin-    *
                ;* ated by a 0FFH byte.                                      *
                ;*                                                           *
                ;*************************************************************

3E8E 7E         MESSG   MOV     A,M     ;get character
3E8F A7                 ANA     A       ;test for end
3E90 F8                 RM
3E91 E5                 PUSH    H       ;save address
3E92 4F                 MOV     C,A     ;prep for console output
3E93 CD0C3E             CALL    CPOUT   ;output it
3E96 E1                 POP     H       ;restore pointer
3E97 23                 INX     H       ;bump to next character
3E98 C38E3E             JMP     MESSG   ;continue until end

                ;*************************************************************
                ;*                                                           *
                ;* settrk: call the disk jockey/2d to seek then exit by      *
                ;*         testing for errors.                               *
                ;*                                                           *
                ;*************************************************************

3E9B CD0CE0     SETTRK  CALL    SEEK
3E9E C3743E             JMP     SEEK1

                ;*************************************************************
                ;*                                                           *
                ;* read: read one sector from the disk. Try ten times on     *
                ;*       errors, before returning an error condition.        *
                ;*                                                           *
                ;*************************************************************

3EA1 2115E0     READ    LXI     H,DISKR ;put disk read address into repeat loop
3EA4 22AB3E     RDWR    SHLD    RW+1
3EA7 060A               MVI     B,10    ;retry counter
3EA9 C5         RDWRL   PUSH    B
3EAA CD0000     RW      CALL    0       ;actually call disk read/write
3EAD C1                 POP     B
3EAE D2793E             JNC     RWOK    ;exit if succesful
3EB1 05                 DCR     B       ;test error count
3EB2 C2A93E             JNZ     RDWRL   ;continue if not zero
3EB5 0EFF               MVI     C,RWERR ;read/write error bit mask
3EB7 C3763E             JMP     DOERRS  ;print the appropriate error message

                ;*************************************************************
                ;*                                                           *
                ;* write: write data onto the disk, also try ten times       *
                ;*        before reporting an error.                         *
                ;*                                                           *
                ;*************************************************************

3EBA 2118E0     WRITE   LXI     H,DISKW
3EBD C3A43E             JMP     RDWR

                ;*************************************************************
                ;*                                                           *
                ;* const: get the status for the currently assigned console  *
                ;*        device. The console device can be gotten from      *
                ;*        iobyte, then a jump to the correct console status  *
                ;*        routine is performed.                              *
                ;*                                                           *
                ;*************************************************************

3EC0 212C3F     CONST   LXI     H,CSTBLE        ;beginning of jump table
3EC3 C3CF3E             JMP     CONIN1          ;select correct jump

                ;*************************************************************
                ;*                                                           *
                ;* csreader: if the console is assigned to the reader then   *
                ;*           a jump will be made here, where another jump    *
                ;*           will occur to the correct reader status.        *
                ;*                                                           *
                ;*************************************************************

3EC6 21343F     CSREADR LXI     H,CSRTBLE       ;beginning of reader status table
3EC9 C3E73E             JMP     READERA
```

```
                ;*************************************************************
                ;*                                                           *
                ;* conin: take the correct jump for the console input        *
                ;*        routine. The jump is based on the two least sig-   *
                ;*        nificant bits of iobyte.                           *
                ;*                                                           *
                ;*************************************************************

3ECC 21043F     CONIN   LXI     H,CITBLE        ;beginning of character input table

                ;
                ; entry at coninl will decode the two least significant bits
                ; of iobyte. This is used by conin,conout, and const.
                ;

3ECF 3A0300     CONIN1  LDA     IOBYTE
3ED2 17                 RAL

                ;
                ; entry at seldev will form an offset into the table pointed
                ; to by H&L and then pick up the address and jump there.
                ;

3ED3 E606       SELDEV  ANI     6H      ;strip off unwanted bits
3ED5 1600               MVI     D,0     ;form affset
3ED7 5F                 MOV     E,A
3ED8 19                 DAD     D       ;add offset
3ED9 7E                 MOV     A,M     ;pick up high byte
3EDA 23                 INX     H
3EDB 66                 MOV     H,M     ;pick up low byte
3EDC 6F                 MOV     L,A     ;form address
3EDD E9                 PCHL            ;go there !

                ;*************************************************************
                ;*                                                           *
                ;* conout: take the proper branch address based on the two   *
                ;*         least significant bits of iobyte.                 *
                ;*                                                           *
                ;*************************************************************

3EDE 210C3F     CONOUT  LXI     H,COTBLE        ;beginning of the character out table
3EE1 C3CF3E             JMP     CONIN1  ;do the decode

                ;*************************************************************
                ;*                                                           *
                ;* reader: select the correct reader device for input. The   *
                ;*         reader is selected from bits 2 and 3 of iobyte.   *
                ;*                                                           *
                ;*************************************************************

3EE4 21243F     READER  LXI     H,RTBLE ;beginning of reader input table

                ;
                ; entry at readera will decode bits 2 & 3 of iobyte, used
                ; by csreader.
                ;

3EE7 3A0300     READERA LDA     IOBYTE

                ;
                ; entry at reader1 will shift the bits into position, used
                ; by list and punch.
                ;

3EEA 1F         READR1  RAR
3EEB C3D33E             JMP     SELDEV

                ;*************************************************************
                ;*                                                           *
                ;* punch: select the correct punch device. The seection      *
                ;*        comes from bits 4&5 of iobyte.                     *
                ;*                                                           *
                ;*************************************************************

3EEE 211C3F     PUNCH   LXI     H,PTBLE ;beginning of punch table
3EF1 3A0300             LDA     IOBYTE

                ;
                ; entry at pnch1 rotates bits a little more in prep for
                ; seldev, used by list.
                ;

3EF4 1F         PNCH1   RAR
3EF5 1F                 RAR
3EF6 C3EA3E             JMP     READR1
```

```
                ;*************************************************************
                ;*                                                           *
                ;* list: select a list device based on bits 6&7 of iobyte    *
                ;*                                                           *
                ;*************************************************************

3EF9 21143F     LIST    LXI     H,LTBLE ;beginning of the list device routines
3EFC 3A0300             LDA     IOBYTE
3EFF 1F                 RAR
3F00 1F                 RAR
3F01 C3F43E             JMP     PNCH1

                ;*************************************************************
                ;*                                                           *
                ;* If customizing I/O routines is being performed, the       *
                ;* table below should be modified to reflect the changes.    *
                ;* all I/O devices are decoded out of iobyte and the jump    *
                ;* is taken from the following tables.                       *
                ;*                                                           *
                ;*************************************************************


                ;*
                ;* console input table
                ;*

3F04 03E0       CITBLE  DW      CITTY   ;input from tty (currently assigned by intioby,input from 2d)
3F06 473F               DW      CICRT   ;input from crt (currently SWITCHBOARD serial port 1)
3F08 E43E               DW      READER  ;input from reader (depends on reader selection)
3F0A 473F               DW      CIUC1   ;input from user console 1 (currently SWITCHBOARD serial port 1)

                ;*
                ;* console output table
                ;*

3F0C 06E0       COTBLE  DW      COTTY   ;output to tty (currently assigned by intioby,output to 2d)
3F0E 3C3F               DW      COCRT   ;output to crt (currently SWITCHBOARD serial port 1)
3F10 F93E               DW      LIST    ;output to list device (depends on bits 6&7 of iobyte)
3F12 3C3F               DW      COUC1   ;output to user console 1 (currently SWITCHBOARD serial port 1)

                ;*
                ;* list device table
                ;*

3F14 06E0       LTBLE   DW      COTTY   ;output to tty (currently assigned by intioby,output to 2d)
3F16 3C3F               DW      COCRT   ;output to crt (currently SWITCHBOARD serial port 1)
3F18 3C3F               DW      COLPT   ;output to line printer (currently SWITCHBOARD serial port 1)
3F1A 3C3F               DW      COUL1   ;output to user line printer 1 (currently SWITCHBOARD serial port 1)

                ;*
                ;* punch device table
                ;*

3F1C 06E0       PTBLE   DW      COTTY   ;output to the tty (currently assigned by intioby,output to 2d)
3F1E 3C3F               DW      COPTP   ;output to paper tape punch (currently SWITCHBOARD serial port 1)
3F20 3C3F               DW      COUP1   ;output to user punch 1 (currently SWITCHBOARD serial port 1)
3F22 3C3F               DW      COUP2   ;output to user punch 2 (currntlly SWITCHBOARD serial port 1)

                ;*
                ;* reader device input table
                ;*

3F24 03E0       RTBLE   DW      CITTY   ;input from tty (currently assigned by intioby, input from 2d)
3F26 473F               DW      CIPTR   ;input from paper tape reader (currently SWITCHBOARD serial port 1)
3F28 473F               DW      CIUR1   ;input from user reader 1 (currently SWITCHBOARD serial port 1)
3F2A 473F               DW      CIUR2   ;input from user reader 2 (currently SWITCHBOARD serial port 1)

                ;*
                ;* console status table
                ;*

3F2C 533F       CSTBLE  DW      CSTTY   ;status of tty (currently assigned by intioby, ststus from 2d)
3F2E 5B3F               DW      CSCRT   ;status from crt (currently SWITCHBOARD serial port 1)
3F30 C63E               DW      CSREADR ;status from reader (depends on reader device )
3F32 5B3F               DW      CSUC1   ;status from user console 1 (currently SWITCHBOARD serial port 1)

                ;*
                ;* status fromreader device
                ;*

3F34 533F       CSRTBLE DW      CSTTY   ;status from tty (currently assigned by intioby, status of 2d)
3F36 5B3F               DW      CSPTR   ;status from paper tape reader (currently SWITCHBOARD serial port 1)
3F38 5B3F               DW      CSUR1   ;status from user reader 1 (currently SWITCHBOARD serial port 1)
3F3A 5B3F               DW      CSUR2   ;status of user reader 2 (currently SWITCHBOARD serial port 1)
```

```
                ;*************************************************************
                ;*                                                           *
                ;* The following equates set output device to output to      *
                ;* the SWITCHBOARD serial port 1.                            *
                ;*                                                           *
                ;*************************************************************

3F3C =          COCRT   EQU     $       ;output from crt
3F3C =          COUC1   EQU     $       ;output from user console 1
3F3C =          COUL1   EQU     $       ;output from user line printer 1
3F3C =          COPTP   EQU     $       ;output from paper tape punch
3F3C =          COUP1   EQU     $       ;output from user punch 1
3F3C =          COUP2   EQU     $       ;output from user punch 2
3F3C DB02       COLPT   IN      2       ;output from line printer,get status
3F3E E680               ANI     80H     ;wait until ok to send
3F40 CA3C3F             JZ      COLPT
3F43 79                 MOV     A,C     ;output the character
3F44 D301               OUT     1
3F46 C9                 RET

                ;*************************************************************
                ;*                                                           *
                ;* The following equates set the input from the devices to   *
                ;* come from the SWITCHBOARD serial port 1                   *
                ;*                                                           *
                ;*************************************************************

3F47 =          CIUC1   EQU     $       ;input from user console 1
3F47 =          CICRT   EQU     $       ;input from crt
3F47 =          CIUR1   EQU     $       ;input from user reader 1
3F47 =          CIUR2   EQU     $       ;input from user reader 2
3F47 DB02       CIPTR   IN      2       ;input from paper tape reader, get status
3F49 E640               ANI     40H     ;wait for character
3F4B CA473F             JZ      CIPTR
3F4E DB01               IN      1
3F50 E67F               ANI     7FH     ;strip off the parity
3F52 C9                 RET

                ;*************************************************************
                ;*                                                           *
                ;* console status routines, test if a character has arrived  *
                ;*                                                           *
                ;*************************************************************

3F53 CD21E0     CSTTY   CALL    TSTAT   ;status from disk jockey 2d
3F56 3E00       STAT    MVI     A,0     ;prep for zero return
3F58 C0                 RNZ             ;nothing found
3F59 3D                 DCR     A       ;return with 0FFH
3F5A C9                 RET

                ;*************************************************************
                ;*                                                           *
                ;* The following equates cause the devices to get status     *
                ;* from the SWITCHBOARD serial port 1.                       *
                ;*                                                           *
                ;*************************************************************

3F5B =          CSUR1   EQU     $       ;status of user reader 1
3F5B =          CSUR2   EQU     $       ;status of user reader 2
3F5B =          CSPTR   EQU     $       ;status of paper tape reader
3F5B =          CSUC1   EQU     $       ;status of user console 1
3F5B DB02       CSCRT   IN      2       ;status from crt, get status
3F5D E640               ANI     40H     ;strip of data ready bit
3F5F EE40               XRI     40H     ;make correct polarity
3F61 C3563F             JMP     STAT    ;return proper indication

                ;*************************************************************
                ;*                                                           *
                ;* The following messages could be put out by the cbios.     *
                ;*                                                           *
                ;*************************************************************

3F64 0D0A       PROMPT  DB      ACR,ALF ;prompt message - "16K CP/M VERS 1.4"
3F66 31364B20           DB      '16K '
3F6A 43502F4D           DB      'CP/M'
3F6E 20564552           DB      ' VER'
3F72 5320312E           DB      'S 1.'
3F76 34                 DB      '4'
3F77 0D0A               DB      ACR,ALF
3F79 FF                 DB      0FFH
```

```
                        *
                        * error message table
                        *

3F7A 8C3F       MSGTBL  DW      ILLDATA ;illegal data
3F7C 983F               DW      DATAREQ ;data request
3F7E A33F               DW      DATALOS ;data lost
3F80 AF3F               DW      CRCERR  ;crc error
3F82 BB3F               DW      ILLSEC  ;illegal sector
3F84 CF3F               DW      ILLDMA  ;illegal dma
3F86 DA3F               DW      WRITPRO ;write protected
3F88 E53F               DW      NOTRDY  ;not ready
3F8A F13F               DW      UNKNOWN ;unknown error

3F8C 0D0A       ILLDATA DB      ACR,ALF
3F8E 494C474C20         DB      'ILGL DATA'
3F97 FF                 DB      0FFH
3F98 0D0A       DATAREQ DB      ACR,ALF
3F9A 4441544120         DB      'DATA REQ'
3FA2 FF                 DB      0FFH
3FA3 0D0A       DATALOS DB      ACR,ALF
3FA5 4441544120         DB      'DATA LOST'
3FAE FF                 DB      0FFH
3FAF 0D0A       CRCERR  DB      ACR,ALF
3FB1 4352432045         DB      'CRC ERROR'
3FBA FF                 DB      0FFH
3FB8 0D0A       ILLSEC  DB      ACR,ALF
3FBD 494C474C20         DB      'ILGL SECTOR/TRACK'
3FCE FF                 DB      0FFH
3FCF 0D0A       ILLDMA  DB      ACR,ALF
3FD1 494C474C20         DB      'ILGL DMA'
3FD9 FF                 DB      0FFH
3FDA 0D0A       WRITPRO DB      ACR,ALF
3FDC 5752542050         DB      'WRT PROT'
3FE4 FF                 DB      0FFH
3FE5 0D0A       NOTRDY  DB      ACR,ALF
3FE7 4E4F542052         DB      'NOT READY'
3FF0 FF                 DB      0FFH
3FF1 0D0A       UNKNOWN DB      ACR,ALF
3FF3 554E4B4F57         DB      'UNKOWN ERROR'
3FFF FF                 DB      0FFH
```

```
340:000

340:000 340:000

340:000 343:336
340:000 344:000
340:000 343:370
340:000 343:370
340:000 343:371
340:000 343:371
340:000 343:372
340:000 343:372
340:000 343:373
340:000 343:374
340:000 343:374
340:000 343:375
340:000 343:376
340:000 343:377

340:000 000:001
340:000 000:001
340:000 000:001
340:000 000:004
340:000 000:004
340:000 000:004
340:000 000:004
340:000 000:006
340:000 000:010
340:000 000:010
340:000 000:011
340:000 000:011
340:000 000:011
340:000 000:020
340:000 000:022
340:000 000:030
340:000 000:032
340:000 000:035
340:000 000:100
340:000 000:100
340:000 000:200
340:000 000:200
340:000 000:210
340:000 000:250
340:000 000:300
340:000 000:304
340:000 000:320
```

```
1               AORG OE000H
2
3     ORIGIN    EQU  340:000Q
4
5     BEGINS    EQU  ORIGIN+3:336Q
6     RAM       EQU  ORIGIN+4:000Q
7     IO        EQU  ORIGIN+3:370Q
8     UDATA     EQU  IO
9     DREG      EQU  IO+1
10    USTAT     EQU  IO+1
11    DCMD      EQU  IO+2
12    DSTAT     EQU  IO+2
13    CSTALL    EQU  IO+3
14    CMDREG    EQU  IO+4
15    CSTAT     EQU  IO+4
16    TRKREG    EQU  IO+5
17    SECREG    EQU  IO+6
18    DATREG    EQU  IO+7
19
20    LIGHT     EQU  1
21    HEAD      EQU  1
22    DENSITY   EQU  1
23    ISTAT     EQU  4
24    INTRQ     EQU  4
25    TZERO     EQU  4
26    LOAD      EQU  4
27    ULOAD     EQU  6
28    OSTAT     EQU  10Q
29    DSIDE     EQU  10Q
30    NOLITE    EQU  11Q
31    DCRINT    EQU  11Q
32    HCMD      EQU  11Q
33    INDEX     EQU  20Q
34    WINDXD    EQU  22Q
35    SKCMD     EQU  30Q
36    RINDXD    EQU  32Q
37    SVCMD     EQU  35Q
38    WPROT     EQU  100Q
39    ACCESS    EQU  100Q
40    RSTBIT    EQU  200Q
41    READY     EQU  200Q
42    RDCMD     EQU  210Q
43    WRCMD     EQU  250Q
44    STBITS    EQU  300Q
45    RACMD     EQU  304Q
46    CLRCMD    EQU  320Q
47
48    *NP
```

```
340:000 303 151 340     49    DBOOT   JMP   BOOT
340:003 303 351 340     50    TERMIN  JMP   CIN
340:006 303 332 340     51    TRMOUT  JMP   COUT
340:011 303 132 341     52    TKZERO  JMP   HOME
340:014 303 213 341     53    TRKSET  JMP   SEEK
340:017 303 201 341     54    SETSEC  JMP   SECSET
340:022 303 103 341     55    SETDMA  JMP   DMA
340:025 303 335 341     56    DREAD   JMP   READ
340:030 303 274 341     57    DWRITE  JMP   WRITE
340:033 303 074 341     58    SELDRV  JMP   DRIVE
340:036 303 370 340     59    TPANIC  JMP   CPAN
340:041 303 003 341     60    TSTAT   JMP   TMSTAT
340:044 303 064 341     61    DMAST   JMP   DMSTAT
340:047 303 011 341     62    STATUS  JMP   DISKST
340:052 303 305 340     63    DSKERR  JMP   LERROR
340:055 303 263 343     64    SETDEN  JMP   DENFIX
340:060 303 345 343     65    SETSID  JMP   SIDEFX
                        66
340:063 000:066         67            DS    66Q
                        68
340:151                 69    BOOT
340:151 061 372 347     70            LXI   SP,TRACK+1 initialize SP
340:154 315 322 343     71            CALL  TIMOUT   poc/reset timeout
340:157 041 001 000     72            LXI   H,1
340:162 345             73            PUSH  H        track 0, sector 1
340:163 056 011         74            MVI   L,DCRINT set up the
340:165 345             75            PUSH  H        -side select
340:166 046 377         76            MVI   H,377Q   -and initial
340:170 345             77            PUSH  H        -drive
340:171 345             78            PUSH  H        -parameters
340:172 345             79            PUSH  H
340:173 345             80            PUSH  H
340:174 041 010 000     81            LXI   H,10Q    initialize
340:177 345             82            PUSH  H        -tzflag & cdisk
340:200 056 176         83            MVI   L,176Q   initialize
340:202 345             84            PUSH  H        -disk & drvsel
340:203 056 010         85            MVI   L,10Q    initialize
340:205 345             86            PUSH  H        -hdflag & dsflag
340:206 046 030         87            MVI   H,30Q    initialize
340:210 345             88            PUSH  H        -timer constant
340:211 076 177         89            MVI   A,177Q   start 1791
340:213 062 371 343     90            STA   DREG
340:216 076 320         91            MVI   A,CLRCMD 1791 reset
340:220 062 374 343     92            STA   CMDREG
340:223                 93    LDHEAD
340:223 257             94            XRA   A        load the head
340:224 315 033 343     95            CALL  HDCHK    -and test for
340:227 322 245 340     96            JNC   DOOROK   -drive ready
340:232 076 001         97            MVI   A,LIGHT  turn on the
340:234 062 366 347     98            STA   DCREG    -error LED
340:237 315 322 343     99            CALL  TIMOUT   timeout to
340:242 303 223 340     100           JMP   LDHEAD   -close drive door
                        101   *NP
```

```
340:245
340:245 076 011
340:247 062 366 347
340:252 315 226 343
340:255 301
340:256 001 000 347
340:261 305
340:262 325
340:263 041 000 000
340:266 345
340:267 000
340:270 305
340:271 006 014
340:273
340:273 305
340:274 315 335 341
340:277 301
340:300 320
340:301 005
340:302 302 273 340
340:305
340:305 016 011
340:307 021 303 242
340:312
340:312 033
340:313 172
340:314 263
340:315 302 312 340
340:320 076 010
340:322 251
340:323 117
340:324 062 372 343
340:327 303 307 340

340:332
340:332 072 371 343
340:335 346 010
340:337 302 332 340
340:342 171
340:343 057
340:344 062 370 343
340:347 057
340:350 311

340:351
340:351 072 371 343
340:354 346 004
340:356 302 351 340
340:361 072 370 343
340:364 057
340:365 346 177
340:367 311

340:370
340:370 072 371 343
340:373 346 004
340:375 300
340:376 315 351 340
341:001 271
341:002 311
```

```
102  DOOROK
103          MVI   A,NOLITE turn off the
104          STA   DCREG    -error LED
105          CALL  MEASUR   head load time
106          POP   B        adjust the stack
107          LXI   B,RAM+300H DMA addr
108          PUSH  B        initialize
109          PUSH  D        -dmaadr & timer
110          LXI   H,0      initialize
111          PUSH  H        -error counts
112          NOP   .        debug instruction
113          PUSH  B        boot address
114          MVI   B,12     number of retrys
115  LDLOOP
116          PUSH  B        save the retry no.
117          CALL  READ     read boot sector
118          POP   B        restor retry no.
119          RNC   .        successful read?
120          DCR   B        no! - count down
121          JNZ   LDLOOP   -and try again
122  LERROR
123          MVI   C,11Q
124          LXI   D,242:303Q
125  LELOOP
126          DCX   D
127          MOV   A,D
128          ORA   E
129          JNZ   LELOOP
130          MVI   A,10Q    blink
131          XRA   C        -the LED at
132          MOV   C,A      -top of the
133          STA   DCMD     -circuit board
134          JMP   LERROR+2
135
136  COUT
137          LDA   USTAT    get UART status
138          ANI   OSTAT    output ready mask
139          JNZ   COUT     test buffer empty
140          MOV   A,C      character data
141          CMA   .        negative logic bus
142          STA   UDATA    send data to UART
143          CMA   .        make positive
144          RET
145
146  CIN
147          LDA   USTAT    get UART status
148          ANI   ISTAT    input ready mask
149          JNZ   CIN      wait for input
150          LDA   UDATA    get the character
151          CMA   .        adjust for negative bus
152          ANI   177Q     trim to 7 bits
153          RET
154
155  CPAN
156          LDA   USTAT    get UART status
157          ANI   ISTAT    input ready mask
158          RNZ   .        test for data
159          CALL  CIN      get character
160          CMP   C        test for panic chtr
161          RET
162  *NP
```

```
341:003
341:003 072 371 343
341:006 346 004
341:010 311

341:011
341:011 041 375 343
341:014 116
341:015 043
341:016 106
341:017 072 366 347
341:022 057
341:023 346 001
341:025 017
341:026 127
341:027 072 367 347
341:032 007
341:033 007
341:034 007
341:035 262
341:036 127
341:037 072 350 347
341:042 356 010
341:044 027
341:045 027
341:046 202
341:047 127
341:050 072 375 347
341:053 027
341:054 027
341:055 262
341:056 127
341:057 072 354 347
341:062 202
341:063 311

341:064
341:064 345
341:065 052 346 347
341:070 104
341:071 115
341:072 341
341:073 311

341:074
341:074 171
341:075 346 003
341:077 062 353 347
341:102 311
```

```
163  TMSTAT
164          LDA   USTAT     get UART status
165          ANI   ISTAT     input ready mask
166          RET
167
168  DISKST
169          LXI   H,TRKREG  most recent
170          MOV   C,M       -track to C
171          INX   H         most recent
172          MOV   B,M       -sector to B
173          LDA   DCREG     get current
174          CMA   .         -density in
175          ANI   1         -the msb
176          RRC   .         -position
177          MOV   D,A       save in D
178          LDA   SIDE      put the
179          RLC   .         -most recent
180          RLC   .         -side select
181          RLC   .         -in bit positin
182          ORA   D         -6 and merge
183          MOV   D,A       save in D
184          LDA   DSFLAG    get the
185          XRI   DSIDE     -most recent
186          RAL   .         -double sided
187          RAL   .         -status and place
188          ADD   D         -in bit position
189          MOV   D,A       -5 and merge
190          LDA   SECLEN    get the
191          RAL   .         -sector length
192          RAL   .         -code bits in
193          ORA   D         -positions 2 & 3
194          MOV   D,A       -and merge
195          LDA   CDISK     get the current
196          ADD   D         -disk no. in bit
197          RET   .         -positions 0 & 1
198
199  DMSTAT
200          PUSH  H         save the HL pair
201          LHLD  DMAADR    move the
202          MOV   B,H       -DMA address to
203          MOV   C,L       -the BC pair
204          POP   H         recover HL
205          RET
206
207  DRIVE
208          MOV   A,C       drive select
209          ANI   3         -values must be
210          STA   DISK      -between zero
211          RET   .         -and three
212  *NP
```

```
341:103
341:103 041 000 034
341:106 011
341:107 332 124 341
341:112 041 010 040
341:115 011
341:116 322 124 341
341:121 076 020
341:123 311
341:124
341:124 140
341:125 151
341:126 042 346 347
341:131 311

341:132
341:132 315 343 342
341:135 330
341:136 315 160 341
341:141 365
341:142 237
341:143 062 371 347
341:146 062 375 343
341:151 257
341:152 062 355 347
341:155 303 043 342
341:160
341:160 257
341:161 062 351 347
341:164 041 000 000
341:167 076 011
341:171 315 142 343
341:174 346 004
341:176 300
341:177 067
341:200 311

341:201
341:201 257
341:202 261
341:203 067
341:204 310
341:205 346 037
341:207 062 370 347
341:212 311

341:213
341:213 171
341:214 376 115
341:216 077
341:217 330
341:220 062 371 347
341:223 311
```

```
213  DMA
214          LXI   H,-RAM    test the
215          DAD   B         -DMA address
216          JC    DMASET    -for conflict
217          LXI   H,8-ORIGIN
218          DAD   B         -with the I/O
219          JNC   DMASET    -on the DJ/2D
220          MVI   A,20Q     -controller
221          RET
222  DMASET
223          MOV   H,B       store the
224          MOV   L,C       -BC pair
225          SHLD  DMAADR
226          RET
227
228  HOME
229          CALL  HDLOAD    load the head
230          RC    .         not ready error
231          CALL  HENTRY    move the head
232          PUSH  PSW       save status
233          SBB   A         update the
234          STA   TRACK     -track
235          STA   TRKREG    -registers
236          XRA   A         set the not
237          STA   TZFLAG    -verified flag
238          JMP   LEAVE+1   unload the head
239  HENTRY
240          XRA   A         set the force
241          STA   HDFLAG    -verify flag
242          LXI   H,0       timeout constant
243          MVI   A,HCMD    move the head
244          CALL  CENTRY    to track 0
245          ANI   TZERO     track zero bit
246          RNZ
247          STC   .         error flag
248          RET
249
250  SECSET
251          XRA   A         test for
252          ORA   C         -zero value
253          STC   .         error flag
254          RZ    .         error return
255          ANI   37Q       trim & clear cry
256          STA   SECTOR
257          RET
258
259  SEEK
260          MOV   A,C       test for
261          CPI   77        -track
262          CMC   .         -too large
263          RC
264          STA   TRACK
265          RET
266  *NP
```

```
341:224
341:224 062 343 347
341:227 315 226 343
341:232 016 001
341:234
341:234 171
341:235 062 376 343
341:240 072 370 347
341:243 271
341:244 310
341:245 076 210
341:247 315 135 343
341:252 332 040 342
341:255 014
341:256 303 234 341

341:261
341:261 062 374 343
341:264 110
341:265 021 377 343
341:270 052 346 347
341:273 311

341:274
341:274 315 063 342
341:277 332 042 342
341:302
341:302 076 250
341:304 315 261 341
341:307
341:307 176
341:310 043
341:311 022
341:312 176
341:313 043
341:314 022
341:315 176
341:316 043
341:317 022
341:320 015
341:321 176
341:322 043
341:323 022
341:324 302 307 341
341:327 041 302 341
341:332 303 373 341
```

```
267  ISSUE
268          STA   ECOUNT+1 update count
269          CALL  MEASUR   find the index
270          MVI   C,1      start w/sector 1
271  ISLOOP
272          MOV   A,C      initialize the
273          STA   SECREG   -sector register
274          LDA   SECTOR   test for
275          CMP   C        -target sector
276          RZ
277          MVI   A,RDCMD  do a fake
278          CALL  COMAND   -read command
279          JC    PLEAVE   abort on error
280          INR   C        increment sector no.
281          JMP   ISLOOP
282
283  COMNDP
284          STA   CMDREG   start the operation
285          MOV   C,B      initialize block count
286          LXI   D,DATREG data register
287          LHLD  DMAADR   transfer address
288          RET
289
290  WRITE
291          CALL  PREP     prepare for write
292          JC    LEAVE    abort operation
293  WRENTRY
294          MVI   A,WRCMD  start a write
295          CALL  COMNDP
296  WRLOOP
297          MOV   A,M      load 1st byte of data
298          INX   H        advance pointer
299          STAX  D        write 1st byte of data
300          MOV   A,M      load 2nd byte of data
301          INX   H        advance pointer
302          STAX  D        write 2nd byte of data
303          MOV   A,M      load 3rd byte of data
304          INX   H        advance pointer
305          STAX  D        write 3rd byte of data
306          DCR   C        reduce block count
307          MOV   A,M      load 4th byte of data
308          INX   H        advance pointer
309          STAX  D        write 4th byte of data
310          JNZ   WRLOOP   write next 4 bytes
311          LXI   H,WRENTRY return entry addr
312          JMP   CBUSY
313  *NP
```

```
341:335
341:335 315 063 342
341:340 332 042 342
341:343
341:343 076 210
341:345 315 261 341
341:350
341:350 032
341:351 167
341:352 043
341:353 032
341:354 167
341:355 043
341:356 032
341:357 167
341:360 043
341:361 015
341:362 032
341:363 167
341:364 043
341:365 302 350 341
341:370 041 343 341

341:373
341:373 345
341:374 041 374 343
341:377 315 154 343
342:002 346 137
342:004 312 041 342
342:007 376 020
342:011 302 040 342
342:014 072 342 347
342:017 075
342:020 372 027 342
342:023 062 342 347
342:026 311
342:027
342:027 072 343 347
342:032 075
342:033 362 224 341
342:036 076 020
342:040
342:040 067
342:041 341
342:042
342:042 365
342:043 072 366 347
342:046 356 004
342:050 062 372 343
342:053 072 352 347
342:056 062 371 343
342:061 361
342:062 311
```

```
314  READ
315          CALL PREP      prepare for read
316          JC   LEAVE     abort operation
317  RDENTRY
318          MVI  A,RDCMD   start a read
319          CALL COMNDP
320  RDLOOP
321          LDAX D         read 1st byte
322          MOV  M,A       store 1st byte
323          INX  H         advance pointer
324          LDAX D         read 2nd byte
325          MOV  M,A       store 2nd byte
326          INX  H         advance pointer
327          LDAX D         read 3rd byte
328          MOV  M,A       store 3rd byte
329          INX  H         advance pointer
330          DCR  C         reduce block count
331          LDAX D         read 4th byte
332          MOV  M,A       store 4th byte
333          INX  H         advance pointer
334          JNZ  RDLOOP    read next 4 bytes
335          LXI  H,RDENTRY return entry addr
336
337  CBUSY
338          PUSH H         save return
339          LXI  H,CSTAT   wait for 1791
340          CALL BUSY      -to finish command
341          ANI  137Q      error bit mask
342          JZ   LEAVE-1   no error
343          CPI  20Q       premature interrupt
344          JNZ  PLEAVE    other error type
345          LDA  ECOUNT    decrement error
346          DCR  A         -count number 1
347          JM   STEST     hard interrupt error
348          STA  ECOUNT    update count
349          RET  .         do operation over
350  STEST
351          LDA  ECOUNT+1  decrement error
352          DCR  A         -count number 2
353          JP   ISSUE     issue a command
354          MVI  A,20Q     irrecoverable error!
355  PLEAVE
356          STC  .         error flag
357          POP  H         adjust the stack
358  LEAVE
359          PUSH PSW       save the status
360          LDA  DCREG     control bits
361          XRI  LOAD      toggle the
362          STA  DCMD      -head load bit
363          LDA  DRVSEL    enable access to
364          STA  DREG      -the data register
365          POP  PSW       recover the status
366          RET
367  *NP
```

```
342:063
342:063 315 343 342
342:066 330
342:067 072 375 343
342:072 074
342:073 314 160 341
342:076 330
342:077 041 375 343
342:102 072 371 347
342:105 276
342:106 043
342:107 043
342:110 167
342:111 171
342:112 062 371 343
342:115 312 152 342
342:120 257
342:121 062 351 347
342:124 072 372 343
342:127 346 010
342:131 062 350 347
342:134 037
342:135 037
342:136 037
342:137 306 030
342:141 041 000 000
342:144 315 142 343
342:147 332 216 342

342:152
342:152 072 351 347
342:155 267
342:156 302 271 342
342:161 006 002
342:163
342:163 076 035
342:165 315 135 343
342:170 346 231
342:172 127
342:173 312 225 342
342:176 072 366 347
342:201 356 001
342:203 062 366 347
342:206 062 372 343
342:211 005
342:212 302 163 342
342:215 172
342:216
342:216 067
342:217 365
342:220 315 160 341
342:223 361
342:224 311
```

```
368  PREP
369          CALL HDLOAD    load the head
370          RC   .         test for drive ready
371          LDA  TRKREG    get old track
372          INR  A         test for head
373          CZ   HENTRY    -not calibrated
374          RC   .         seek error?
375          LXI  H,TRKREG  old track
376          LDA  TRACK     new track
377          CMP  M         test for head motion
378          INX  H         advance to the
379          INX  H         -data register
380          MOV  M,A       save new track
381          MOV  A,C       turn off data reg
382          STA  DREG      -access control bit
383          JZ   TVERFY    test for seek
384          XRA  A         force a read
385          STA  HDFLAG    -header operation
386          LDA  DSTAT     get the double
387          ANI  DSIDE     -sided flag
388          STA  DSFLAG    save for status
389          RAR  .         shift for
390          RAR  .         -3/6 ms step
391          RAR  .         -rate constant
392          ADI  SKCMD     do a
393          LXI  H,0       -seek
394          CALL CENTRY    -operation
395          JC   SERROR    seek error?
396
397  TVERFY
398          LDA  HDFLAG    get the force
399          ORA  A         -verify hdr flag
400          JNZ  CHKSEC    no seek & head OK
401          MVI  B,2       verify retry count
402  SLOOP
403          MVI  A,SVCMD   do a verify
404          CALL COMAND    -command
405          ANI  231Q      error bit mask
406          MOV  D,A       save
407          JZ   RDHDR     no error!
408          LDA  DCREG     denisty control
409          XRI  DENSITY   flip the density
410          STA  DCREG     update and
411          STA  DCMD      -change density
412          DCR  B         decrement retry
413          JNZ  SLOOP     -count & test
414          MOV  A,D       restore error bits
415  SERROR
416          STC  .         error flag
417          PUSH PSW       save errors
418          CALL HENTRY    seek to trk 0
419          POP  PSW       recover errors
420          RET
421  *NP
```

```
342:225
342:225 006 012
342:227
342:227 021 377 343
342:232 041 372 347
342:235 076 304
342:237 062 374 343
342:242
342:242 032
342:243 167
342:244 054
342:245 302 242 342
342:250 041 374 343
342:253 315 154 343
342:256 267
342:257 312 271 342
342:262 005
342:263 302 227 342
342:266 303 216 342
342:271
342:271 072 375 347
342:274 117
342:275 006 000
342:277 041 337 342
342:302 011
342:303 072 370 347
342:306 107
342:307 206
342:310 076 020
342:312 330
342:313 170
342:314 062 376 343
342:317 076 040
342:321 041 005 005
342:324 042 342 347

342:327
342:327 015
342:330 107
342:331 370
342:332 027
342:333 267
342:334 303 327 342

342:337
342:337 345
342:340 345
342:341 360
342:342 367
```

```
422  RDHDR
423          MVI   B,12Q     number of retrys
424  RHLOOP
425          LXI   D,DATREG  data register
426          LXI   H,TRACK+1 data pointer
427          MVI   A,RACMD   start a read
428          STA   CMDREG    -header operation
429  RHL1
430          LDAX  D         get disk data
431          MOV   M,A       store in mem
432          INR   L         advance pointer
433          JNZ   RHL1      test end of page
434          LXI   H,CSTAT   wait for 1791
435          CALL  BUSY      -to finish cmd
436          ORA   A         test for errors
437          JZ    CHKSEC    transfer OK?
438          DCR   B         no! - test for
439          JNZ   RHLOOP    -hard error
440          JMP   SERROR    recalibrate
441  CHKSEC
442          LDA   SECLEN    get the sector
443          MOV   C,A       -size and setup
444          MVI   B,0       -the table offset
445          LXI   H,STABLE  sector table
446          DAD   B         sector size pntr
447          LDA   SECTOR    get the sector
448          MOV   B,A       -and save in B
449          ADD   M         compare w/table
450          MVI   A,20Q     error flag
451          RC    .         error return
452          MOV   A,B       initialize 1791
453          STA   SECREG    -sector register
454          MVI   A,40Q     128 byte sector
455          LXI   H,5:005Q  initialize
456          SHLD  ECOUNT    -error counts
457
458  SZLOOP
459          DCR   C         reduce size count
460          MOV   B,A       sector size to B
461          RM    .         return on minus
462          RAL   .         double the count
463          ORA   A         clear the carry
464          JMP   SZLOOP
465
466  STABLE
467          DB    345Q      26 sector diskettes
468          DB    345Q      26 sector diskettes
469          DB    360Q      15 sector diskettes
470          DB    367Q      8 sector diskettes
471  *NP
```

```
342:343
342:343 041 353 347
342:346 116
342:347 043
342:350 136
342:351 161
342:352 043
342:353 173
342:354 271
342:355 176
342:356 066 001
342:360 312 033 343
342:363 043
342:364 345
342:365 026 000
342:367 102
342:370 031
342:371 031
342:372 072 366 347
342:375 167
342:376 043
342:377 021 375 343
343:002 032
343:003 167
343:004 341
343:005 011
343:006 011
343:007 176
343:010 062 366 347
343:013 043
343:014 176
343:015 022
343:016 076 177
343:020
343:020 007
343:021 015
343:022 362 020 343
343:025 346 177
343:027 062 352 347
343:032 257
```

```
472  HDLOAD
473          LXI   H,DISK     new drv ptr
474          MOV   C,M        save new drv in C
475          INX   H          current drv ptr
476          MOV   E,M        save old drv in E
477          MOV   M,C        update current drv
478          INX   H          home cmd flag
479          MOV   A,E        test for
480          CMP   C          -drive change
481          MOV   A,M        head load mask
482          MVI   M,HEAD     update the mask
483          JZ    HDCHK      no drive change?
484          INX   H          addr of drive table
485          PUSH  H          save table addr
486          MVI   D,0        set up the
487          MOV   B,D        -offset address
488          DAD   D          calculate the
489          DAD   D          -parameter addr
490          LDA   DCREG      save the
491          MOV   M,A        density status
492          INX   H          track pointer
493          LXI   D,TRKREG   1791 trk reg
494          LDAX  D          get current track
495          MOV   M,A        save in the table
496          POP   H          beginning of table
497          DAD   B          new drive
498          DAD   B          -table pointer
499          MOV   A,M        get density status
500          STA   DCREG      update DCREG
501          INX   H          get the old
502          MOV   A,M        -track number
503          STAX  D          -and update 1791
504          MVI   A,177Q     drive select bits
505  DSROT
506          RLC   .          rotate to
507          DCR   C          -select the
508          JP    DSROT      -proper drive
509          ANI   177Q       set the run bit
510          STA   DRVSEL     save in drv reg
511          XRA   A          force a head load
512  *NP
```

```
343:033
343:033 041 372 343
343:036 246
343:037 062 351 347
343:042 365
343:043 072 352 347
343:046 117
343:047 072 367 347
343:052 057
343:053 241
343:054 062 371 343
343:057 356 100
343:061 117
343:062 072 366 347
343:065 107
343:066 072 371 347
343:071 326 001
343:073 237
343:074 075
343:075 057
343:076 260
343:077 167
343:100 361
343:101 302 117 343
343:104 345
343:105 052 344 347
343:110
343:110 053
343:111 174
343:112 265
343:113 302 110 343
343:116 341
343:117
343:117 176
343:120 346 200
343:122 300
343:123
343:123 072 366 347
343:126 366 006
343:130 167
343:131 076 200
343:133 067
343:134 311

343:135
343:135 052 344 347
343:140 051
343:141 051
343:142
343:142 353
343:143 041 374 343
343:146 167
343:147
343:147 176
343:150 037
343:151 322 147 343
```

```
513  HDCHK
514          LXI   H,DSTAT   test for
515          ANA   M         -head loaded
516          STA   HDFLAG    save the head
517          PUSH  PSW       -loaded status
518          LDA   DRVSEL    get current drive
519          MOV   C,A       save
520          LDA   SIDE      get current side
521          CMA   .         -and merge
522          ANA   C         -with drive select
523          STA   DREG      select drive & side
524          XRI   ACCESS    toggle access bit
525          MOV   C,A       save for PREP routine
526          LDA   DCREG     den & head cntl bits
527          MOV   B,A       save
528          LDA   TRACK     get the new track
529          SUI   1         force single
530          SBB   A         -density
531          DCR   A         -if track = 0
532          CMA   .         compliment
533          ORA   B         merge w/control bits
534          MOV   M,A       load head & set density
535          POP   PSW       head load status
536          JNZ   RDYCHK    conditionally
537          PUSH  H         -wait for head
538          LHLD  TIMER     -load time out
539  TLOOP
540          DCX   H         count down
541          MOV   A,H       -40 ms for
542          ORA   L         -head load
543          JNZ   TLOOP     -time out
544          POP   H
545  RDYCHK
546          MOV   A,M       test for
547          ANI   READY     -drive ready
548          RNZ
549  UNLOAD
550          LDA   DCREG     force a
551          ORI   ULOAD     -head
552          MOV   M,A       -unload
553          MVI   A,READY   set drive
554          STC   .         -not ready
555          RET   .         -error flag
556
557  COMAND
558          LHLD  TIMER     get index count
559          DAD   H         -and multiply
560          DAD   H         -by four
561  CENTRY
562          XCHG  .         save in D-E pair
563          LXI   H,CSTAT   issue command
564          MOV   M,A       -to the 1791
565  NBUSY
566          MOV   A,M       wait
567          RAR   .         -for the
568          JNC   NBUSY     -busy flag
569  *NP
```

```
343:154
343:154 176
343:155 037
343:156 176
343:157 320
343:160 303 166 343
343:163
343:163 303 343 342
343:166 033
343:167 172
343:170 263
343:171 302 154 343
343:174 136
343:175 345
343:176 043
343:177 126
343:200 072 352 347
343:203 356 200
343:205 062 371 343
343:210 356 300
343:212 343
343:213 062 371 343
343:216 066 320
343:220 343
343:221 162
343:222 341
343:223 173
343:224 067
343:225 311

343:226
343:226 021 000 000
343:231 041 372 343
343:234 016 020
343:236
343:236 176
343:237 241
343:240 312 236 343
343:243
343:243 176
343:244 241
343:245 302 243 343
343:250
343:250 023
343:251 343
343:252 343
343:253 343
343:254 343
343:255 176
343:256 241
343:257 312 250 343
343:262 311
```

```
570  BUSY
571          MOV   A,M        test for
572          RAR   .          -device busy
573          MOV   A,M        restore status
574          RNC   .          return if not busy
575          JMP   PATCH+3    jump around patch
576  PATCH
577          JMP   HDLOAD     patch for old ATE
578          DCX   D          test for
579          MOV   A,D        -two disk
580          ORA   E          -revolutions
581          JNZ   BUSY       47 machine cycles
582          MOV   E,M        get error code
583          PUSH  H          save cmd address
584          INX   H          track register
585          MOV   D,M        save present track
586          LDA   DRVSEL     control bits
587          XRI   RSTBIT     reset the 1791
588          STA   DREG       -controller to
589          XRI   STBITS     -clear the
590          XTHL  .          -command busy
591          STA   DREG       -fault condition
592          MVI   M,CLRCMD   force interrupt
593          XTHL  .          restore the
594          MOV   M,D        -the track reg
595          POP   H          restore the stack
596          MOV   A,E        error code to A
597          STC   .          -error flag
598          RET
599
600  MEASUR
601          LXI   D,0        initialize count
602          LXI   H,DSTAT    status port
603          MVI   C,INDEX    index bit flag
604  INDXLO
605          MOV   A,M        wait for
606          ANA   C          -index
607          JZ    INDXLO     -pulse high
608  INDXHI
609          MOV   A,M        wait for
610          ANA   C          -index
611          JNZ   INDXHI     -pulse low
612  INDXCT
613          INX   D          advance count
614          XTHL  .          four dummy
615          XTHL  .          -instructions
616          XTHL  .          -to lengthen
617          XTHL  .          -the delay
618          MOV   A,M        wait for
619          ANA   C          -the index
620          JZ    INDXCT     -to go high
621          RET   .          98 machine cycles
622  *NP
```

```
343:263
343:263 171
343:264 346 001
343:266 057
343:267 107
343:270 041 353 347
343:273 136
343:274 026 000
343:276 043
343:277 176
343:300 253
343:301 365
343:302 043
343:303 043
343:304 031
343:305 031
343:306 176
343:307 366 001
343:311 240
343:312 167
343:313 361
343:314 300
343:315 176
343:316 062 366 347
343:321 311

343:322
343:322 041 000 000
343:325
343:325 053
343:326 174
343:327 265
343:330 343
343:331 343
343:332 302 325 343
343:335 311

343:336
343:336 345
343:337 041 342 343
343:342
343:342 351
343:343 341
343:344 311

343:345
343:345 171
343:346 346 001
343:350 027
343:351 027
343:352 027
343:353 027
343:354 062 367 347
343:357 311
```

```
623  DENFIX
624          MOV   A,C       trim the
625          ANI   1         -excess bits
626          CMA   .         compliment and
627          MOV   B,A       -save in B
628          LXI   H,DISK    new disk ptr
629          MOV   E,M       get disk no.
630          MVI   D,0       offset addr
631          INX   H         current disk ptr
632          MOV   A,M       move to ACC
633          XRA   E         cmpr old w/new
634          PUSH  PSW       save status
635          INX   H         disk table
636          INX   H         -address
637          DAD   D         add the
638          DAD   D         -offset
639          MOV   A,M       get parameters
640          ORI   1         mask off density
641          ANA   B         set new density
642          MOV   M,A       update parameters
643          POP   PSW       test new=old?
644          RNZ
645          MOV   A,M       updata CDISK
646          STA   DCREG     -also
647          RET
648
649  TIMOUT
650          LXI   H,0       time-out delay
651  TILOOP
652          DCX   H         decrement count
653          MOV   A,H       test for delay
654          ORA   L         -count equal zero
655          XTHL  .         long NOP
656          XTHL  .         -instruction
657          JNZ   TILOOP
658          RET
659
660  SBEGIN
661          PUSH  H
662          LXI   H,DSTALL
663  DSTALL
664          PCHL
665          POP   H
666          RET
667
668  SIDEFX
669          MOV   A,C       get the side bit
670          ANI   1         trim the excess
671          RAL   .         move the bit
672          RAL   .         -to the side
673          RAL   .         -select bit
674          RAL   .         -position
675          STA   SIDE      save side bit
676          RET
677  *NP
```

```
343:360
343:360 000
343:361 000
343:362 000
343:363 000
343:364 000
343:365 303 000 340

343:370 000:010

347:311

347:311 000:031

347:342 000 000
347:344 000 030
347:346 000 347
347:350 010
347:351 000
347:352 176
347:353 000
347:354 010
347:355 000
347:356 011
347:357 377
347:360 011
347:361 377
347:362 011
347:363 377
347:364 011
347:365 377
347:366 011
347:367 000
347:370 001
347:371 000
347:372 000
347:373 000
347:374 000
347:375 000
347:376 000
347:377 000
```

```
678  PWRJMP
679          NOP   .          power-on
680          NOP   .          -jump
681          NOP   .          -sequence
682          NOP   .          -with NOP
683          NOP   .          -padding
684          JMP   DBOOT
685
686          DS    10Q        I/O locations
687
688          AORG  RAM+3:311Q
689
690  STACK   DS    31Q
691
692  ECOUNT  DW    0          error count cells
693  TIMER   DW    30:000Q    head load time out
694  DMAADR  DW    RAM+300H   dma address
695  DSFLAG  DB    10Q
696  HDFLAG  DB    0          read header flag
697  DRVSEL  DB    176Q       drive select constant
698  DISK    DB    0          new drive
699  CDISK   DB    10Q        current disk
700  TZFLAG  DB    0          home cmd indicator
701  DOPRAM  DB    11Q        drive 0 parameters
702  DOTRK   DB    377Q       drive 0 track no
703  D1PRAM  DB    11Q        drive 1 parameters
704  D1TRK   DB    377Q       drive 1 track no
705  D2PRAM  DB    11Q        drive 2 parameters
706  D2TRK   DB    377Q       drive 2 track no
707  D3PRAM  DB    11Q        drive 3 parameters
708  D3TRK   DB    377Q       drive 3 track no
709  DCREG   DB    11Q        current parameters
710  SIDE    DB    0          new side
711  SECTOR  DB    1          new sector
712  TRACK   DB    0          new track
713  TRKNO   DB    0          disk
714  SIDENO  DB    0          -sector
715  SECTNO  DB    0          -header
716  SECLEN  DB    0          -data
717  CRCLO   DB    0          -buffer
718  CRCHI   DB    0
```

```
E000                    1           AORG OE000H
                        2
E000    E000            3   ORIGIN  EQU  340:000Q
                        4
E000    E3DE            5   BEGINS  EQU  ORIGIN+3:336Q
E000    E400            6   RAM     EQU  ORIGIN+4:000Q
E000    E3F8            7   IO      EQU  ORIGIN+3:370Q
E000    E3F8            8   UDATA   EQU  IO
E000    E3F9            9   DREG    EQU  IO+1
E000    E3F9            10  USTAT   EQU  IO+1
E000    E3FA            11  DCMD    EQU  IO+2
E000    E3FA            12  DSTAT   EQU  IO+2
E000    E3FB            13  CSTALL  EQU  IO+3
E000    E3FC            14  CMDREG  EQU  IO+4
E000    E3FC            15  CSTAT   EQU  IO+4
E000    E3FD            16  TRKREG  EQU  IO+5
E000    E3FE            17  SECREG  EQU  IO+6
E000    E3FF            18  DATREG  EQU  IO+7
                        19
E000    0001            20  LIGHT   EQU  1
E000    0001            21  HEAD    EQU  1
E000    0001            22  DENSITY EQU  1
E000    0004            23  ISTAT   EQU  4
E000    0004            24  INTRQ   EQU  4
E000    0004            25  TZERO   EQU  4
E000    0004            26  LOAD    EQU  4
E000    0006            27  ULOAD   EQU  6
E000    0008            28  OSTAT   EQU  10Q
E000    0008            29  DSIDE   EQU  10Q
E000    0009            30  NOLITE  EQU  11Q
E000    0009            31  DCRINT  EQU  11Q
E000    0009            32  HCMD    EQU  11Q
E000    0010            33  INDEX   EQU  20Q
E000    0012            34  WINDXD  EQU  22Q
E000    0018            35  SKCMD   EQU  30Q
E000    001A            36  RINDXD  EQU  32Q
E000    001D            37  SVCMD   EQU  35Q
E000    0040            38  WPROT   EQU  100Q
E000    0040            39  ACCESS  EQU  100Q
E000    0080            40  RSTBIT  EQU  200Q
E000    0080            41  READY   EQU  200Q
E000    0088            42  RDCMD   EQU  210Q
E000    00A8            43  WRCMD   EQU  250Q
E000    00C0            44  STBITS  EQU  300Q
E000    00C4            45  RACMD   EQU  304Q
E000    00D0            46  CLRCMD  EQU  320Q
                        47
                        48  *NP
```

```
E000  C3 69 E0          49  DBOOT   JMP   BOOT
E003  C3 E9 E0          50  TERMIN  JMP   CIN
E006  C3 DA E0          51  TRMOUT  JMP   COUT
E009  C3 5A E1          52  TKZERO  JMP   HOME
E00C  C3 8B E1          53  TRKSET  JMP   SEEK
E00F  C3 81 E1          54  SETSEC  JMP   SECSET
E012  C3 43 E1          55  SETDMA  JMP   DMA
E015  C3 DD E1          56  DREAD   JMP   READ
E018  C3 BC E1          57  DWRITE  JMP   WRITE
E01B  C3 3C E1          58  SELDRV  JMP   DRIVE
E01E  C3 F8 E0          59  TPANIC  JMP   CPAN
E021  C3 03 E1          60  TSTAT   JMP   TMSTAT
E024  C3 34 E1          61  DMAST   JMP   DMSTAT
E027  C3 09 E1          62  STATUS  JMP   DISKST
E02A  C3 C5 E0          63  DSKERR  JMP   LERROR
E02D  C3 B3 E3          64  SETDEN  JMP   DENFIX
E030  C3 E5 E3          65  SETSID  JMP   SIDEFX
                        66
E033  0036              67          DS    66Q
                        68
E069                    69  BOOT
E069  31 FA E7          70          LXI   SP,TRACK+1 initialize SP
E06C  CD D2 E3          71          CALL  TIMOUT   poc/reset timeout
E06F  21 01 00          72          LXI   H,1
E072  E5                73          PUSH  H        track 0, sector 1
E073  2E 09             74          MVI   L,DCRINT set up the
E075  E5                75          PUSH  H        -side select
E076  26 FF             76          MVI   H,377Q   -and initial
E078  E5                77          PUSH  H        -drive
E079  E5                78          PUSH  H        -parameters
E07A  E5                79          PUSH  H
E07B  E5                80          PUSH  H
E07C  21 08 00          81          LXI   H,10Q    initialize
E07F  E5                82          PUSH  H        -tzflag & cdisk
E080  2E 7E             83          MVI   L,176Q   initialize
E082  E5                84          PUSH  H        -disk & drvsel
E083  2E 08             85          MVI   L,10Q    initialize
E085  E5                86          PUSH  H        -hdflag & dsflag
E086  26 18             87          MVI   H,30Q    initialize
E088  E5                88          PUSH  H        -timer constant
E089  3E 7F             89          MVI   A,177Q   start 1791
E08B  32 F9 E3          90          STA   DREG
E08E  3E D0             91          MVI   A,CLRCMD 1791 reset
E090  32 FC E3          92          STA   CMDREG
E093                    93  LDHEAD
E093  AF                94          XRA   A        load the head
E094  CD 1B E3          95          CALL  HDCHK    -and test for
E097  D2 A5 E0          96          JNC   DOOROK   -drive ready
E09A  3E 01             97          MVI   A,LIGHT  turn on the
E09C  32 F6 E7          98          STA   DCREG    -error LED
E09F  CD D2 E3          99          CALL  TIMOUT   timeout to
E0A2  C3 93 E0          100         JMP   LDHEAD   -close drive door
                        101 *NP
```

```
E0A5
E0A5    3E 09
E0A7    32 F6 E7
E0AA    CD 96 E3
E0AD    C1
E0AE    01 00 E7
E0B1    C5
E0B2    D5
E0B3    21 00 00
E0B6    E5
E0B7    00
E0B8    C5
E0B9    06 0C
E0BB
E0BB    C5
E0BC    CD DD E1
E0BF    C1
E0C0    D0
E0C1    05
E0C2    C2 BB E0
E0C5
E0C5    0E 09
E0C7    11 C3 A2
E0CA
E0CA    1B
E0CB    7A
E0CC    B3
E0CD    C2 CA E0
E0D0    3E 08
E0D2    A9
E0D3    4F
E0D4    32 FA E3
E0D7    C3 C7 E0

E0DA
E0DA    3A F9 E3
E0DD    E6 08
E0DF    C2 DA E0
E0E2    79
E0E3    2F
E0E4    32 F8 E3
E0E7    2F
E0E8    C9

E0E9
E0E9    3A F9 E3
E0EC    E6 04
E0EE    C2 E9 E0
E0F1    3A F8 E3
E0F4    2F
E0F5    E6 7F
E0F7    C9

E0F8
E0F8    3A F9 E3
E0FB    E6 04
E0FD    C0
E0FE    CD E9 E0
E101    B9
E102    C9
```

```
102  DOOROK
103          MVI   A,NOLITE turn off the
104          STA   DCREG    -error LED
105          CALL  MEASUR   head load time
106          POP   B        adjust the stack
107          LXI   B,RAM+300H DMA addr
108          PUSH  B        initialize
109          PUSH  D        -dmaadr & timer
110          LXI   H,0      initialize
111          PUSH  H        -error counts
112          NOP   .        debug instruction
113          PUSH  B        boot address
114          MVI   B,12     number of retrys
115  LDLOOP
116          PUSH  B        save the retry no.
117          CALL  READ     read boot sector
118          POP   B        restor retry no.
119          RNC   .        successful read?
120          DCR   B        no! - count down
121          JNZ   LDLOOP   -and try again
122  LERROR
123          MVI   C,11Q
124          LXI   D,242:303Q
125  LELOOP
126          DCX   D
127          MOV   A,D
128          ORA   E
129          JNZ   LELOOP
130          MVI   A,10Q    blink
131          XRA   C        -the LED at
132          MOV   C,A      -top of the
133          STA   DCMD     -circuit board
134          JMP   LERROR+2
135
136  COUT
137          LDA   USTAT    get UART status
138          ANI   OSTAT    output ready mask
139          JNZ   COUT     test buffer empty
140          MOV   A,C      character data
141          CMA   .        negative logic bus
142          STA   UDATA    send data to UART
143          CMA   .        make positive
144          RET
145
146  CIN
147          LDA   USTAT    get UART status
148          ANI   ISTAT    input ready mask
149          JNZ   CIN      wait for input
150          LDA   UDATA    get the character
151          CMA   .        adjust for negative bus
152          ANI   177Q     trim to 7 bits
153          RET
154
155  CPAN
156          LDA   USTAT    get UART status
157          ANI   ISTAT    input ready mask
158          RNZ   .        test for data
159          CALL  CIN      get character
160          CMP   C        test for panic chtr
161          RET
162  *NP
```

```
E103                                    163  TMSTAT
E103    3A F9 E3                        164          LDA   USTAT     get UART status
E106    E6 04                           165          ANI   ISTAT     input ready mask
E108    C9                              166          RET
                                        167
E109                                    168  DISKST
E109    21 FD E3                        169          LXI   H,TRKREG most recent
E10C    4E                              170          MOV   C,M       -track to C
E10D    23                              171          INX   H         most recent
E10E    46                              172          MOV   B,M       -sector to B
E10F    3A F6 E7                        173          LDA   DCREG     get current
E112    2F                              174          CMA   .         -density in
E113    E6 01                           175          ANI   1         -the msb
E115    0F                              176          RRC   .         -position
E116    57                              177          MOV   D,A       save in D
E117    3A F7 E7                        178          LDA   SIDE      put the
E11A    07                              179          RLC   .         -most recent
E11B    07                              180          RLC   .         -side select
E11C    07                              181          RLC   .         -in bit positin
E11D    B2                              182          ORA   D         -6 and merge
E11E    57                              183          MOV   D,A       save in D
E11F    3A E8 E7                        184          LDA   DSFLAG    get the
E122    EE 08                           185          XRI   DSIDE     -most recent
E124    17                              186          RAL   .         -double sided
E125    17                              187          RAL   .         -status and place
E126    82                              188          ADD   D         -in bit position
E127    57                              189          MOV   D,A       -5 and merge
E128    3A FD E7                        190          LDA   SECLEN    get the
E12B    17                              191          RAL   .         -sector length
E12C    17                              192          RAL   .         -code bits in
E12D    B2                              193          ORA   D         -positions 2 & 3
E12E    57                              194          MOV   D,A       -and merge
E12F    3A EC E7                        195          LDA   CDISK     get the current
E132    82                              196          ADD   D         -disk no. in bit
E133    C9                              197          RET   .         -positions 0 & 1
                                        198
E134                                    199  DMSTAT
E134    E5                              200          PUSH  H         save the HL pair
E135    2A E6 E7                        201          LHLD  DMAADR    move the
E138    44                              202          MOV   B,H       -DMA address to
E139    4D                              203          MOV   C,L       -the BC pair
E13A    E1                              204          POP   H         recover HL
E13B    C9                              205          RET
                                        206
E13C                                    207  DRIVE
E13C    79                              208          MOV   A,C       drive select
E13D    E6 03                           209          ANI   3         -values must be
E13F    32 EB E7                        210          STA   DISK      -between zero
E142    C9                              211          RET   .         -and three
                                        212  *NP
```

```
E143
E143    21 00 1C
E146    09
E147    DA 54 E1
E14A    21 08 20
E14D    09
E14E    D2 54 E1
E151    3E 10
E153    C9
E154
E154    60
E155    69
E156    22 E6 E7
E159    C9

E15A
E15A    CD E3 E2
E15D    D8
E15E    CD 70 E1
E161    F5
E162    9F
E163    32 F9 E7
E166    32 FD E3
E169    AF
E16A    32 ED E7
E16D    C3 23 E2
E170
E170    AF
E171    32 E9 E7
E174    21 00 00
E177    3E 09
E179    CD 62 E3
E17C    E6 04
E17E    C0
E17F    37
E180    C9

E181
E181    AF
E182    B1
E183    37
E184    C8
E185    E6 1F
E187    32 F8 E7
E18A    C9

E18B
E18B    79
E18C    FE 4D
E18E    3F
E18F    D8
E190    32 F9 E7
E193    C9
```

```
213  DMA
214          LXI  H,-RAM    test the
215          DAD  B         -DMA address
216          JC   DMASET    -for conflict
217          LXI  H,8-ORIGIN
218          DAD  B         -with the I/O
219          JNC  DMASET    -on the DJ/2D
220          MVI  A,20Q     -controller
221          RET
222  DMASET
223          MOV  H,B       store the
224          MOV  L,C       -BC pair
225          SHLD DMAADR
226          RET
227
228  HOME
229          CALL HDLOAD    load the head
230          RC   .         not ready error
231          CALL HENTRY    move the head
232          PUSH PSW       save status
233          SBB  A         update the
234          STA  TRACK     -track
235          STA  TRKREG    -registers
236          XRA  A         set the not
237          STA  TZFLAG    -verified flag
238          JMP  LEAVE+1   unload the head
239  HENTRY
240          XRA  A         set the force
241          STA  HDFLAG    -verify flag
242          LXI  H,0       timeout constant
243          MVI  A,HCMD    move the head
244          CALL CENTRY    to track 0
245          ANI  TZERO     track zero bit
246          RNZ
247          STC  .         error flag
248          RET
249
250  SECSET
251          XRA  A         test for
252          ORA  C         -zero value
253          STC  .         error flag
254          RZ   .         error return
255          ANI  37Q       trim & clear cry
256          STA  SECTOR
257          RET
258
259  SEEK
260          MOV  A,C       test for
261          CPI  77        -track
262          CMC  .         -too large
263          RC
264          STA  TRACK
265          RET
266  *NP
```

```
E194                                    267  ISSUE
E194    32 E3 E7                        268          STA  ECOUNT+1 update count
E197    CD 96 E3                        269          CALL MEASUR  find the index
E19A    0E 01                           270          MVI  C,1     start w/sector 1
E19C                                    271  ISLOOP
E19C    79                              272          MOV  A,C     initialize the
E19D    32 FE E3                        273          STA  SECREG  -sector register
E1A0    3A F8 E7                        274          LDA  SECTOR  test for
E1A3    B9                              275          CMP  C       -target sector
E1A4    C8                              276          RZ
E1A5    3E 88                           277          MVI  A,RDCMD do a fake
E1A7    CD 5D E3                        278          CALL COMAND  -read command
E1AA    DA 20 E2                        279          JC   PLEAVE  abort on error
E1AD    0C                              280          INR  C       increment sector no.
E1AE    C3 9C E1                        281          JMP  ISLOOP
                                        282
E1B1                                    283  COMNDP
E1B1    32 FC E3                        284          STA  CMDREG  start the operation
E1B4    48                              285          MOV  C,B     initialize block count
E1B5    11 FF E3                        286          LXI  D,DATREG data register
E1B8    2A E6 E7                        287          LHLD DMAADR  transfer address
E1BB    C9                              288          RET
                                        289
E1BC                                    290  WRITE
E1BC    CD 33 E2                        291          CALL PREP    prepare for write
E1BF    DA 22 E2                        292          JC   LEAVE   abort operation
E1C2                                    293  WRENTRY
E1C2    3E A8                           294          MVI  A,WRCMD start a write
E1C4    CD B1 E1                        295          CALL COMNDP
E1C7                                    296  WRLOOP
E1C7    7E                              297          MOV  A,M     load 1st byte of data
E1C8    23                              298          INX  H       advance pointer
E1C9    12                              299          STAX D       write 1st byte of data
E1CA    7E                              300          MOV  A,M     load 2nd byte of data
E1CB    23                              301          INX  H       advance pointer
E1CC    12                              302          STAX D       write 2nd byte of data
E1CD    7E                              303          MOV  A,M     load 3rd byte of data
E1CE    23                              304          INX  H       advance pointer
E1CF    12                              305          STAX D       write 3rd byte of data
E1D0    0D                              306          DCR  C       reduce block count
E1D1    7E                              307          MOV  A,M     load 4th byte of data
E1D2    23                              308          INX  H       advance pointer
E1D3    12                              309          STAX D       write 4th byte of data
E1D4    C2 C7 E1                        310          JNZ  WRLOOP  write next 4 bytes
E1D7    21 C2 E1                        311          LXI  H,WRENTRY return entry addr
E1DA    C3 FB E1                        312          JMP  CBUSY
                                        313  *NP
```

```
E1DD
E1DD    CD 33 E2
E1E0    DA 22 E2
E1E3
E1E3    3E 88
E1E5    CD B1 E1
E1E8
E1E8    1A
E1E9    77
E1EA    23
E1EB    1A
E1EC    77
E1ED    23
E1EE    1A
E1EF    77
E1F0    23
E1F1    0D
E1F2    1A
E1F3    77
E1F4    23
E1F5    C2 E8 E1
E1F8    21 E3 E1

E1FB
E1FB    E5
E1FC    21 FC E3
E1FF    CD 6C E3
E202    E6 5F
E204    CA 21 E2
E207    FE 10
E209    C2 20 E2
E20C    3A E2 E7
E20F    3D
E210    FA 17 E2
E213    32 E2 E7
E216    C9
E217
E217    3A E3 E7
E21A    3D
E21B    F2 94 E1
E21E    3E 10
E220
E220    37
E221    E1
E222
E222    F5
E223    3A F6 E7
E226    EE 04
E228    32 FA E3
E22B    3A EA E7
E22E    32 F9 E3
E231    F1
E232    C9
```

```
314  READ
315          CALL PREP     prepare for read
316          JC   LEAVE    abort operation
317  RDENTRY
318          MVI  A,RDCMD  start a read
319          CALL COMNDP
320  RDLOOP
321          LDAX D        read 1st byte
322          MOV  M,A      store 1st byte
323          INX  H        advance pointer
324          LDAX D        read 2nd byte
325          MOV  M,A      store 2nd byte
326          INX  H        advance pointer
327          LDAX D        read 3rd byte
328          MOV  M,A      store 3rd byte
329          INX  H        advance pointer
330          DCR  C        reduce block count
331          LDAX D        read 4th byte
332          MOV  M,A      store 4th byte
333          INX  H        advance pointer
334          JNZ  RDLOOP   read next 4 bytes
335          LXI  H,RDENTRY return entry addr
336
337  CBUSY
338          PUSH H        save return
339          LXI  H,CSTAT  wait for 1791
340          CALL BUSY     -to finish command
341          ANI  137Q     error bit mask
342          JZ   LEAVE-1  no error
343          CPI  20Q      premature interrupt
344          JNZ  PLEAVE   other error type
345          LDA  ECOUNT   decrement error
346          DCR  A        -count number 1
347          JM   STEST    hard interrupt error
348          STA  ECOUNT   update count
349          RET  .        do operation over
350  STEST
351          LDA  ECOUNT+1 decrement error
352          DCR  A        -count number 2
353          JP   ISSUE    issue a command
354          MVI  A,20Q    irrecoverable error!
355  PLEAVE
356          STC  .        error flag
357          POP  H        adjust the stack
358  LEAVE
359          PUSH PSW      save the status
360          LDA  DCREG    control bits
361          XRI  LOAD     toggle the
362          STA  DCMD     -head load bit
363          LDA  DRVSEL   enable access to
364          STA  DREG     -the data register
365          POP  PSW      recover the status
366          RET
367  *NP
```

```
E233                                368  PREP
E233    CD E3 E2                    369       CALL HDLOAD   load the head
E236    D8                          370       RC   .        test for drive ready
E237    3A FD E3                    371       LDA  TRKREG   get old track
E23A    3C                          372       INR  A        test for head
E23B    CC 70 E1                    373       CZ   HENTRY   -not calibrated
E23E    D8                          374       RC   .        seek error?
E23F    21 FD E3                    375       LXI  H,TRKREG old track
E242    3A F9 E7                    376       LDA  TRACK    new track
E245    BE                          377       CMP  M        test for head motion
E246    23                          378       INX  H        advance to the
E247    23                          379       INX  H        -data register
E248    77                          380       MOV  M,A      save new track
E249    79                          381       MOV  A,C      turn off data reg
E24A    32 F9 E3                    382       STA  DREG     -access control bit
E24D    CA 6A E2                    383       JZ   TVERFY   test for seek
E250    AF                          384       XRA  A        force a read
E251    32 E9 E7                    385       STA  HDFLAG   -header operation
E254    3A FA E3                    386       LDA  DSTAT    get the double
E257    E6 08                       387       ANI  DSIDE    -sided flag
E259    32 E8 E7                    388       STA  DSFLAG   save for status
E25C    1F                          389       RAR  .        shift for
E25D    1F                          390       RAR  .        -3/6 ms step
E25E    1F                          391       RAR  .        -rate constant
E25F    C6 18                       392       ADI  SKCMD    do a
E261    21 00 00                    393       LXI  H,0      -seek
E264    CD 62 E3                    394       CALL CENTRY   -operation
E267    DA 8E E2                    395       JC   SERROR   seek error?
                                    396
E26A                                397  TVERFY
E26A    3A E9 E7                    398       LDA  HDFLAG   get the force
E26D    B7                          399       ORA  A        -verify hdr flag
E26E    C2 B9 E2                    400       JNZ  CHKSEC   no seek & head OK
E271    06 02                       401       MVI  B,2      verify retry count
E273                                402  SLOOP
E273    3E 1D                       403       MVI  A,SVCMD  do a verify
E275    CD 5D E3                    404       CALL COMAND   -command
E278    E6 99                       405       ANI  231Q     error bit mask
E27A    57                          406       MOV  D,A      save
E27B    CA 95 E2                    407       JZ   RDHDR    no error!
E27E    3A F6 E7                    408       LDA  DCREG    denisty control
E281    EE 01                       409       XRI  DENSITY  flip the density
E283    32 F6 E7                    410       STA  DCREG    update and
E286    32 FA E3                    411       STA  DCMD     -change density
E289    05                          412       DCR  B        decrement retry
E28A    C2 73 E2                    413       JNZ  SLOOP    -count & test
E28D    7A                          414       MOV  A,D      restore error bits
E28E                                415  SERROR
E28E    37                          416       STC  .        error flag
E28F    F5                          417       PUSH PSW      save errors
E290    CD 70 E1                    418       CALL HENTRY   seek to trk 0
E293    F1                          419       POP  PSW      recover errors
E294    C9                          420       RET
                                    421  *NP
```

```
E295                                422  RDHDR
E295    06 0A                       423          MVI   B,12Q     number of retrys
E297                                424  RHLOOP
E297    11 FF E3                    425          LXI   D,DATREG data register
E29A    21 FA E7                    426          LXI   H,TRACK+1 data pointer
E29D    3E C4                       427          MVI   A,RACMD  start a read
E29F    32 FC E3                    428          STA   CMDREG   -header operation
E2A2                                429  RHL1
E2A2    1A                          430          LDAX  D        get disk data
E2A3    77                          431          MOV   M,A      store in mem
E2A4    2C                          432          INR   L        advance pointer
E2A5    C2 A2 E2                    433          JNZ   RHL1     test end of page
E2A8    21 FC E3                    434          LXI   H,CSTAT  wait for 1791
E2AB    CD 6C E3                    435          CALL  BUSY     -to finish cmd
E2AE    B7                          436          ORA   A        test for errors
E2AF    CA B9 E2                    437          JZ    CHKSEC   transfer OK?
E2B2    05                          438          DCR   B        no! - test for
E2B3    C2 97 E2                    439          JNZ   RHLOOP   -hard error
E2B6    C3 8E E2                    440          JMP   SERROR   recalibrate
E2B9                                441  CHKSEC
E2B9    3A FD E7                    442          LDA   SECLEN   get the sector
E2BC    4F                          443          MOV   C,A      -size and setup
E2BD    06 00                       444          MVI   B,0      -the table offset
E2BF    21 DF E2                    445          LXI   H,STABLE sector table
E2C2    09                          446          DAD   B        sector size pntr
E2C3    3A F8 E7                    447          LDA   SECTOR   get the sector
E2C6    47                          448          MOV   B,A      -and save in B
E2C7    86                          449          ADD   M        compare w/table
E2C8    3E 10                       450          MVI   A,20Q    error flag
E2CA    D8                          451          RC    .        error return
E2CB    78                          452          MOV   A,B      initialize 1791
E2CC    32 FE E3                    453          STA   SECREG   -sector register
E2CF    3E 20                       454          MVI   A,40Q    128 byte sector
E2D1    21 05 05                    455          LXI   H,5:005Q initialize
E2D4    22 E2 E7                    456          SHLD  ECOUNT   -error counts
                                    457
E2D7                                458  SZLOOP
E2D7    0D                          459          DCR   C        reduce size count
E2D8    47                          460          MOV   B,A      sector size to B
E2D9    F8                          461          RM    .        return on minus
E2DA    17                          462          RAL   .        double the count
E2DB    B7                          463          ORA   A        clear the carry
E2DC    C3 D7 E2                    464          JMP   SZLOOP
                                    465
E2DF                                466  STABLE
E2DF    E5                          467          DB    345Q     26 sector diskettes
E2E0    E5                          468          DB    345Q     26 sector diskettes
E2E1    F0                          469          DB    360Q     15 sector diskettes
E2E2    F7                          470          DB    367Q     8 sector diskettes
                                    471  *NP
```

```
E2E3                          472  HDLOAD
E2E3   21 EB E7               473          LXI  H,DISK    new drv ptr
E2E6   4E                     474          MOV  C,M       save new drv in C
E2E7   23                     475          INX  H         current drv ptr
E2E8   5E                     476          MOV  E,M       save old drv in E
E2E9   71                     477          MOV  M,C       update current drv
E2EA   23                     478          INX  H         home cmd flag
E2EB   7B                     479          MOV  A,E       test for
E2EC   B9                     480          CMP  C         -drive change
E2ED   7E                     481          MOV  A,M       head load mask
E2EE   36 01                  482          MVI  M,HEAD    update the mask
E2F0   CA 1B E3               483          JZ   HDCHK     no drive change?
E2F3   23                     484          INX  H         addr of drive table
E2F4   E5                     485          PUSH H         save table addr
E2F5   16 00                  486          MVI  D,0       set up the
E2F7   42                     487          MOV  B,D       -offset address
E2F8   19                     488          DAD  D         calculate the
E2F9   19                     489          DAD  D         -parameter addr
E2FA   3A F6 E7               490          LDA  DCREG     save the
E2FD   77                     491          MOV  M,A       density status
E2FE   23                     492          INX  H         track pointer
E2FF   11 FD E3               493          LXI  D,TRKREG  1791 trk reg
E302   1A                     494          LDAX D         get current track
E303   77                     495          MOV  M,A       save in the table
E304   E1                     496          POP  H         beginning of table
E305   09                     497          DAD  B         new drive
E306   09                     498          DAD  B         -table pointer
E307   7E                     499          MOV  A,M       get density status
E308   32 F6 E7               500          STA  DCREG     update DCREG
E30B   23                     501          INX  H         get the old
E30C   7E                     502          MOV  A,M       -track number
E30D   12                     503          STAX D         -and update 1791
E30E   3E 7F                  504          MVI  A,177Q    drive select bits
E310                          505  DSROT
E310   07                     506          RLC  .         rotate to
E311   0D                     507          DCR  C         -select the
E312   F2 10 E3               508          JP   DSROT     -proper drive
E315   E6 7F                  509          ANI  177Q      set the run bit
E317   32 EA E7               510          STA  DRVSEL    save in drv reg
E31A   AF                     511          XRA  A         force a head load
                              512  *NP
```

```
E31B                                    513  HDCHK
E31B    21 FA E3                        514          LXI   H,DSTAT   test for
E31E    A6                              515          ANA   M         -head loaded
E31F    32 E9 E7                        516          STA   HDFLAG    save the head
E322    F5                              517          PUSH  PSW       -loaded status
E323    3A EA E7                        518          LDA   DRVSEL    get current drive
E326    4F                              519          MOV   C,A       save
E327    3A F7 E7                        520          LDA   SIDE      get current side
E32A    2F                              521          CMA   .         -and merge
E32B    A1                              522          ANA   C         -with drive select
E32C    32 F9 E3                        523          STA   DREG      select drive & side
E32F    EE 40                           524          XRI   ACCESS    toggle access bit
E331    4F                              525          MOV   C,A       save for PREP routine
E332    3A F6 E7                        526          LDA   DCREG     den & head cntl bits
E335    47                              527          MOV   B,A       save
E336    3A F9 E7                        528          LDA   TRACK     get the new track
E339    D6 01                           529          SUI   1         force single
E33B    9F                              530          SBB   A         -density
E33C    3D                              531          DCR   A         -if track = 0
E33D    2F                              532          CMA   .         compliment
E33E    B0                              533          ORA   B         merge w/control bits
E33F    77                              534          MOV   M,A       load head & set density
E340    F1                              535          POP   PSW       head load status
E341    C2 4F E3                        536          JNZ   RDYCHK    conditionally
E344    E5                              537          PUSH  H         -wait for head
E345    2A E4 E7                        538          LHLD  TIMER     -load time out
E348                                    539  TLOOP
E348    2B                              540          DCX   H         count down
E349    7C                              541          MOV   A,H       -40 ms for
E34A    B5                              542          ORA   L         -head load
E34B    C2 48 E3                        543          JNZ   TLOOP     -time out
E34E    E1                              544          POP   H
E34F                                    545  RDYCHK
E34F    7E                              546          MOV   A,M       test for
E350    E6 80                           547          ANI   READY     -drive ready
E352    C0                              548          RNZ
E353                                    549  UNLOAD
E353    3A F6 E7                        550          LDA   DCREG     force a
E356    F6 06                           551          ORI   ULOAD     -head
E358    77                              552          MOV   M,A       -unload
E359    3E 80                           553          MVI   A,READY   set drive
E35B    37                              554          STC   .         -not ready
E35C    C9                              555          RET   .         -error flag
                                        556
E35D                                    557  COMAND
E35D    2A E4 E7                        558          LHLD  TIMER     get index count
E360    29                              559          DAD   H         -and multiply
E361    29                              560          DAD   H         -by four
E362                                    561  CENTRY
E362    EB                              562          XCHG  .         save in D-E pair
E363    21 FC E3                        563          LXI   H,CSTAT   issue command
E366    77                              564          MOV   M,A       -to the 1791
E367                                    565  NBUSY
E367    7E                              566          MOV   A,M       wait
E368    1F                              567          RAR   .         -for the
E369    D2 67 E3                        568          JNC   NBUSY     -busy flag
                                        569  *NP
```

```
E36C                                570  BUSY
E36C    7E                          571          MOV  A,M       test for
E36D    1F                          572          RAR  .         -device busy
E36E    7E                          573          MOV  A,M       restore status
E36F    D0                          574          RNC  .         return if not busy
E370    C3 76 E3                    575          JMP  PATCH+3   jump around patch
E373                                576  PATCH
E373    C3 E3 E2                    577          JMP  HDLOAD    patch for old ATE
E376    1B                          578          DCX  D         test for
E377    7A                          579          MOV  A,D       -two disk
E378    B3                          580          ORA  E         -revolutions
E379    C2 6C E3                    581          JNZ  BUSY      47 machine cycles
E37C    5E                          582          MOV  E,M       get error code
E37D    E5                          583          PUSH H         save cmd address
E37E    23                          584          INX  H         track register
E37F    56                          585          MOV  D,M       save present track
E380    3A EA E7                    586          LDA  DRVSEL    control bits
E383    EE 80                       587          XRI  RSTBIT    reset the 1791
E385    32 F9 E3                    588          STA  DREG      -controller to
E388    EE C0                       589          XRI  STBITS    -clear the
E38A    E3                          590          XTHL .         -command busy
E38B    32 F9 E3                    591          STA  DREG      -fault condition
E38E    36 D0                       592          MVI  M,CLRCMD  force interrupt
E390    E3                          593          XTHL .         restore the
E391    72                          594          MOV  M,D       -the track reg
E392    E1                          595          POP  H         restore the stack
E393    7B                          596          MOV  A,E       error code to A
E394    37                          597          STC  .         -error flag
E395    C9                          598          RET
                                    599
E396                                600  MEASUR
E396    11 00 00                    601          LXI  D,0       initialize count
E399    21 FA E3                    602          LXI  H,DSTAT   status port
E39C    0E 10                       603          MVI  C,INDEX   index bit flag
E39E                                604  INDXLO
E39E    7E                          605          MOV  A,M       wait for
E39F    A1                          606          ANA  C         -index
E3A0    CA 9E E3                    607          JZ   INDXLO    -pulse high
E3A3                                608  INDXHI
E3A3    7E                          609          MOV  A,M       wait for
E3A4    A1                          610          ANA  C         -index
E3A5    C2 A3 E3                    611          JNZ  INDXHI    -pulse low
E3A8                                612  INDXCT
E3A8    13                          613          INX  D         advance count
E3A9    E3                          614          XTHL .         four dummy
E3AA    E3                          615          XTHL .         -instructions
E3AB    E3                          616          XTHL .         -to lengthen
E3AC    E3                          617          XTHL .         -the delay
E3AD    7E                          618          MOV  A,M       wait for
E3AE    A1                          619          ANA  C         -the index
E3AF    CA A8 E3                    620          JZ   INDXCT    -to go high
E3B2    C9                          621          RET  .         98 machine cycles
                                    622  *NP
```

```
E3B3                                623  DENFIX
E3B3   79                           624          MOV  A,C       trim the
E3B4   E6 01                        625          ANI  1         -excess bits
E3B6   2F                           626          CMA  .         compliment and
E3B7   47                           627          MOV  B,A       -save in B
E3B8   21 EB E7                     628          LXI  H,DISK    new disk ptr
E3BB   5E                           629          MOV  E,M       get disk no.
E3BC   16 00                        630          MVI  D,0       offset addr
E3BE   23                           631          INX  H         current disk ptr
E3BF   7E                           632          MOV  A,M       move to ACC
E3C0   AB                           633          XRA  E         cmpr old w/new
E3C1   F5                           634          PUSH PSW       save status
E3C2   23                           635          INX  H         disk table
E3C3   23                           636          INX  H         -address
E3C4   19                           637          DAD  D         add the
E3C5   19                           638          DAD  D         -offset
E3C6   7E                           639          MOV  A,M       get parameters
E3C7   F6 01                        640          ORI  1         mask off density
E3C9   A0                           641          ANA  B         set new density
E3CA   77                           642          MOV  M,A       update parameters
E3CB   F1                           643          POP  PSW       test new=old?
E3CC   C0                           644          RNZ
E3CD   7E                           645          MOV  A,M       updata CDISK
E3CE   32 F6 E7                     646          STA  DCREG     -also
E3D1   C9                           647          RET
                                    648
E3D2                                649  TIMOUT
E3D2   21 00 00                     650          LXI  H,0       time-out delay
E3D5                                651  TILOOP
E3D5   2B                           652          DCX  H         decrement count
E3D6   7C                           653          MOV  A,H       test for delay
E3D7   B5                           654          ORA  L         -count equal zero
E3D8   E3                           655          XTHL .         long NOP
E3D9   E3                           656          XTHL .         -instruction
E3DA   C2 D5 E3                     657          JNZ  TILOOP
E3DD   C9                           658          RET
                                    659
E3DE                                660  SBEGIN
E3DE   E5                           661          PUSH H
E3DF   21 E2 E3                     662          LXI  H,DSTALL
E3E2                                663  DSTALL
E3E2   E9                           664          PCHL
E3E3   E1                           665          POP  H
E3E4   C9                           666          RET
                                    667
E3E5                                668  SIDEFX
E3E5   79                           669          MOV  A,C       get the side bit
E3E6   E6 01                        670          ANI  1         trim the excess
E3E8   17                           671          RAL  .         move the bit
E3E9   17                           672          RAL  .         -to the side
E3EA   17                           673          RAL  .         -select bit
E3EB   17                           674          RAL  .         -position
E3EC   32 F7 E7                     675          STA  SIDE      save side bit
E3EF   C9                           676          RET
                                    677  *NP
```

```
E3F0                    678  PWRJMP
E3F0    00              679          NOP   .          power-on
E3F1    00              680          NOP   .          -jump
E3F2    00              681          NOP   .          -sequence
E3F3    00              682          NOP   .          -with NOP
E3F4    00              683          NOP   .          -padding
E3F5    C3 00 E0        684          JMP   DBOOT
                        685
E3F8    0008            686          DS    10Q        I/O locations
                        687
E7C9                    688          AORG  RAM+3:311Q
                        689
E7C9    0019            690  STACK   DS    31Q
                        691
E7E2    00 00           692  ECOUNT  DW    0          error count cells
E7E4    00 18           693  TIMER   DW    30:000Q    head load time out
E7E6    00 E7           694  DMAADR  DW    RAM+300H   dma address
E7E8    08              695  DSFLAG  DB    10Q
E7E9    00              696  HDFLAG  DB    0          read header flag
E7EA    7E              697  DRVSEL  DB    176Q       drive select constant
E7EB    00              698  DISK    DB    0          new drive
E7EC    08              699  CDISK   DB    10Q        current disk
E7ED    00              700  TZFLAG  DB    0          home cmd indicator
E7EE    09              701  DOPRAM  DB    11Q        drive 0 parameters
E7EF    FF              702  DOTRK   DB    377Q       drive 0 track no
E7F0    09              703  D1PRAM  DB    11Q        drive 1 parameters
E7F1    FF              704  D1TRK   DB    377Q       drive 1 track no
E7F2    09              705  D2PRAM  DB    11Q        drive 2 parameters
E7F3    FF              706  D2TRK   DB    377Q       drive 2 track no
E7F4    09              707  D3PRAM  DB    11Q        drive 3 parameters
E7F5    FF              708  D3TRK   DB    377Q       drive 3 track no
E7F6    09              709  DCREG   DB    11Q        current parameters
E7F7    00              710  SIDE    DB    0          new side
E7F8    01              711  SECTOR  DB    1          new sector
E7F9    00              712  TRACK   DB    0          new track
E7FA    00              713  TRKNO   DB    0          disk
E7FB    00              714  SIDENO  DB    0          -sector
E7FC    00              715  SECTNO  DB    0          -header
E7FD    00              716  SECLEN  DB    0          -data
E7FE    00              717  CRCLO   DB    0          -buffer
E7FF    00              718  CRCHI   DB    0
```

LIMITED WARRANTY

DISCUS 1 and DISCUS 2D Systems

This addendum to Morrow Designs Inc. Limited Warranty applies to the Shugart Associates Model 800/801 Floppy Disk Drives as used in the DISCUS 1 and 2D Disk systems.

Parts and labor for a floppy disk drive purchased from Morrow Designs Inc. are warranted for a period of forty-five (45) days from the invoice/purchase date. For a period of one (1) year from the invoice/purchase date, parts are warranted. A fixed fee of $55. will be charged for labor. After one (1) year current rates for parts and labor will be charged.

LIMITED WARRANTY

DISCUS 2+2 Systems

This addendum to Morrow Designs Inc. Limited Warranty applies to the EX-CELL-O Corporation Remex Model RFD4000 Floppy Disk Drives as used in the DISCUS 2+2 System.

Parts and labor for a floppy disk drive purchased from Morrow Designs Inc. are warranted for a period of six (6) months from the invoice/purchase date. After six (6) months current rates for parts and labor will be charged.

Morrow Designs, Inc.

Thinker Toys™ 5221 Central Avenue, Richmond, CA 94804 (415) 524-2101

LIMITED WARRANTY

Morrow Designs Inc. warrants its products to be free from defects in workmanship and material for the period indicated. This warranty is limited to the repair or replacement of parts only and liability is limited to the purchase price of the product. The warranty is void if, in the sole opinion of Morrow Designs Inc., the product has been subject to abuse, misuse, unauthorized modification, improper assembly, non-conformance to assembly directions, or if the unit is used in any other manner than intended.

KITS - Parts, including the printed circuit boards, purchased in kit form are warranted for a period of ninety (90) days from the invoice/purchase date. If a board, which was purchased in kit form, is returned for testing or repair, a minimum service charge of $35. will be assessed.

ASSEMBLED BOARDS - Parts, including the printed circuit boards, purchased as factory assebmlies, are warranted for a period of six (6) months from the invoice/purchase date. Out-of-Warranty boards returned for testing of repair will be assessed a minimum of $35. service charge. If the charge to repair will exceed $35., the customer will be notified prior to the actual repair.

ELECTROMECHANICAL PERIPHERALS - Peripheral equipment, such as floppy disk drives, hard disk drives, etc., not manufactured by Morrow Designs Inc. have warranties which vary according to the manufacturer. In most cases, Morrow Designs Inc. provides a warranty equal to or greater than the original manufacturer. Please contact the factory for individual warranty information. Warranty information for each device is included with the equipment when it is shipped.

RETURN PROCEDURE - A COPY OF THE INVOICE OR PROOF OF ORIGINAL PURCHASE IS REQUIRED AND MUST ACCOMPANY THE ITEM FOR IN-WARRANTY SERVICE. Items returned without proof of original purchase will be sent back, shipping charges collect. A description of the problem must accompany the returned item. Shipment must be made prepaid to Morrow Designs Inc. Repaired items will be shipped via U.P.S. surface. Shipment by air requires payment of the additional charges. Morrow Designs Inc. is not responsible for any consequential damages or for damage incurred in transit.

The foregoing warranty is in lieu of all other warranties either expressed or implied and, in any event, is limited to product repair or replacement.

Effective February 1, 1980

Specifications, terms, and pricing are subject to change without notice.

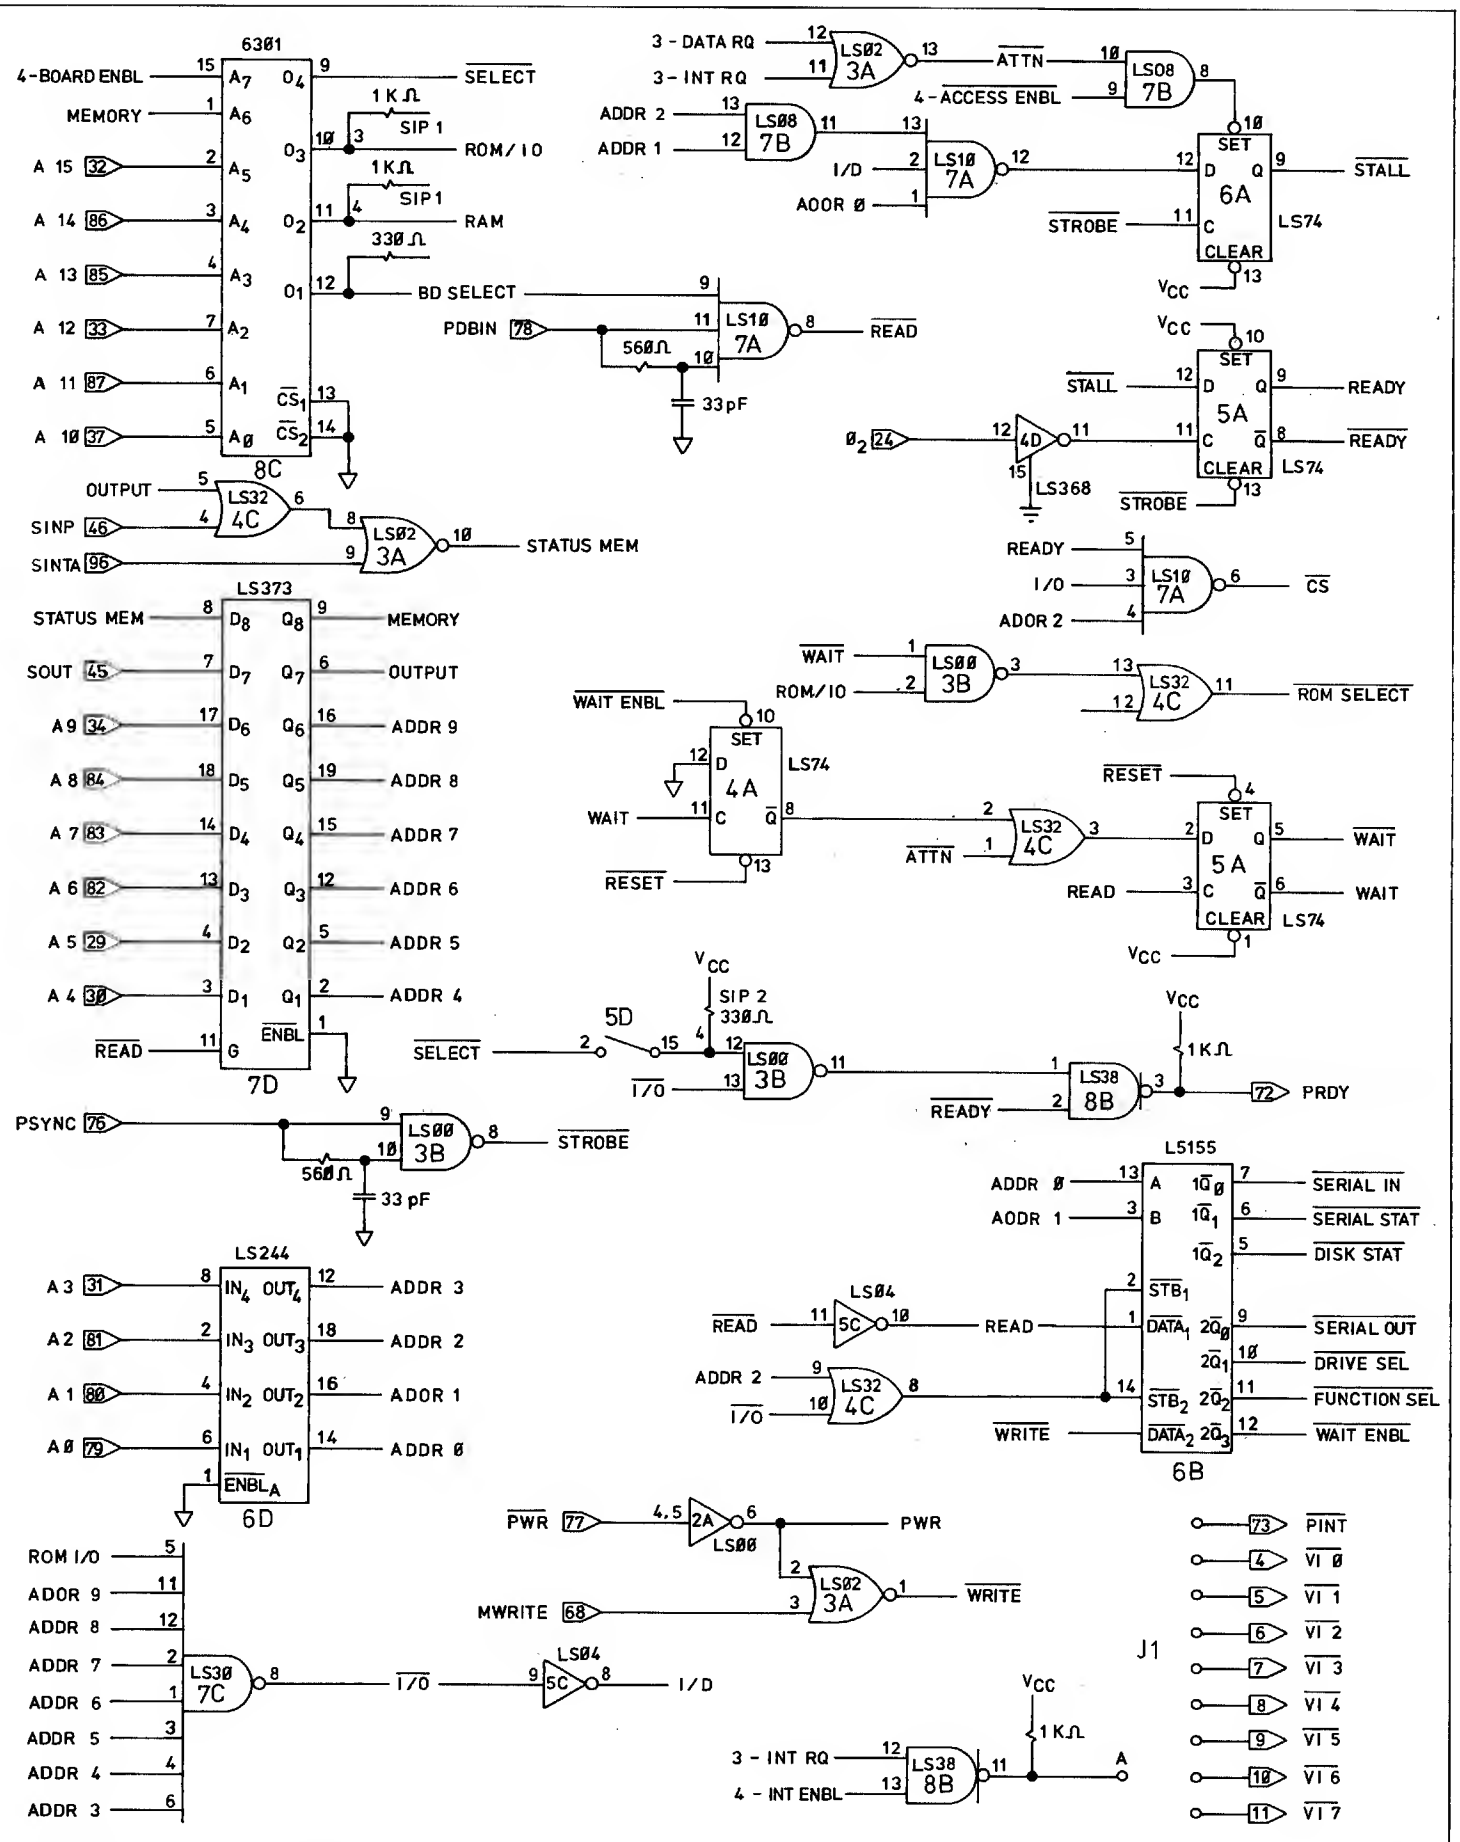

© 1980 G. Morrow

DISK JOCKEY 2D Model B Revision 2 PAGE 1 of 5

Board Select Logic & Address Buffers

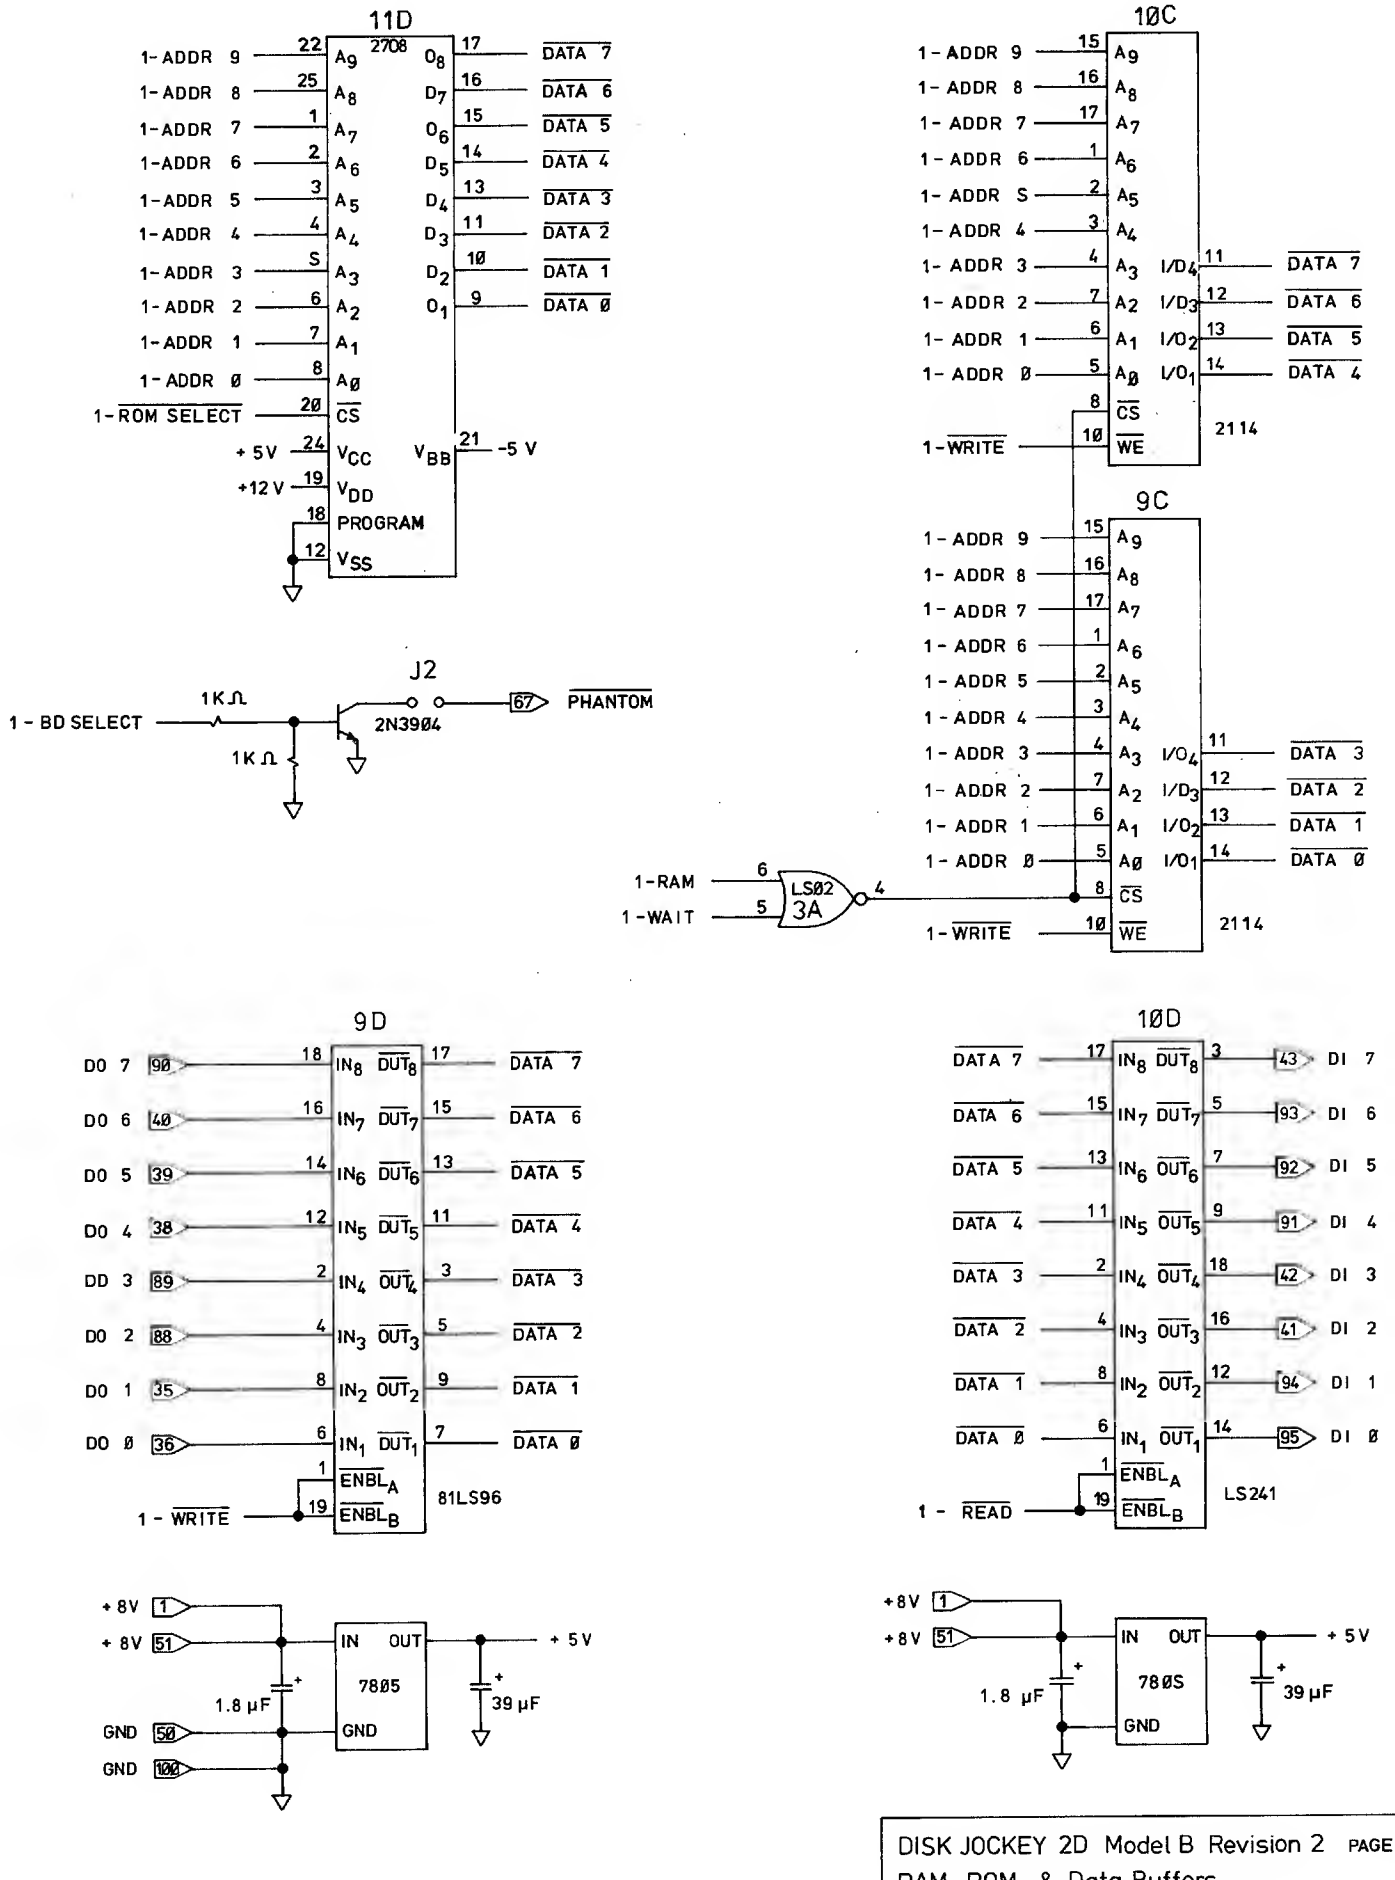

©1980 G. Morrow

DISK JOCKEY 2D Model B Revision 2 PAGE 2 of 5
RAM, ROM, & Data Buffers

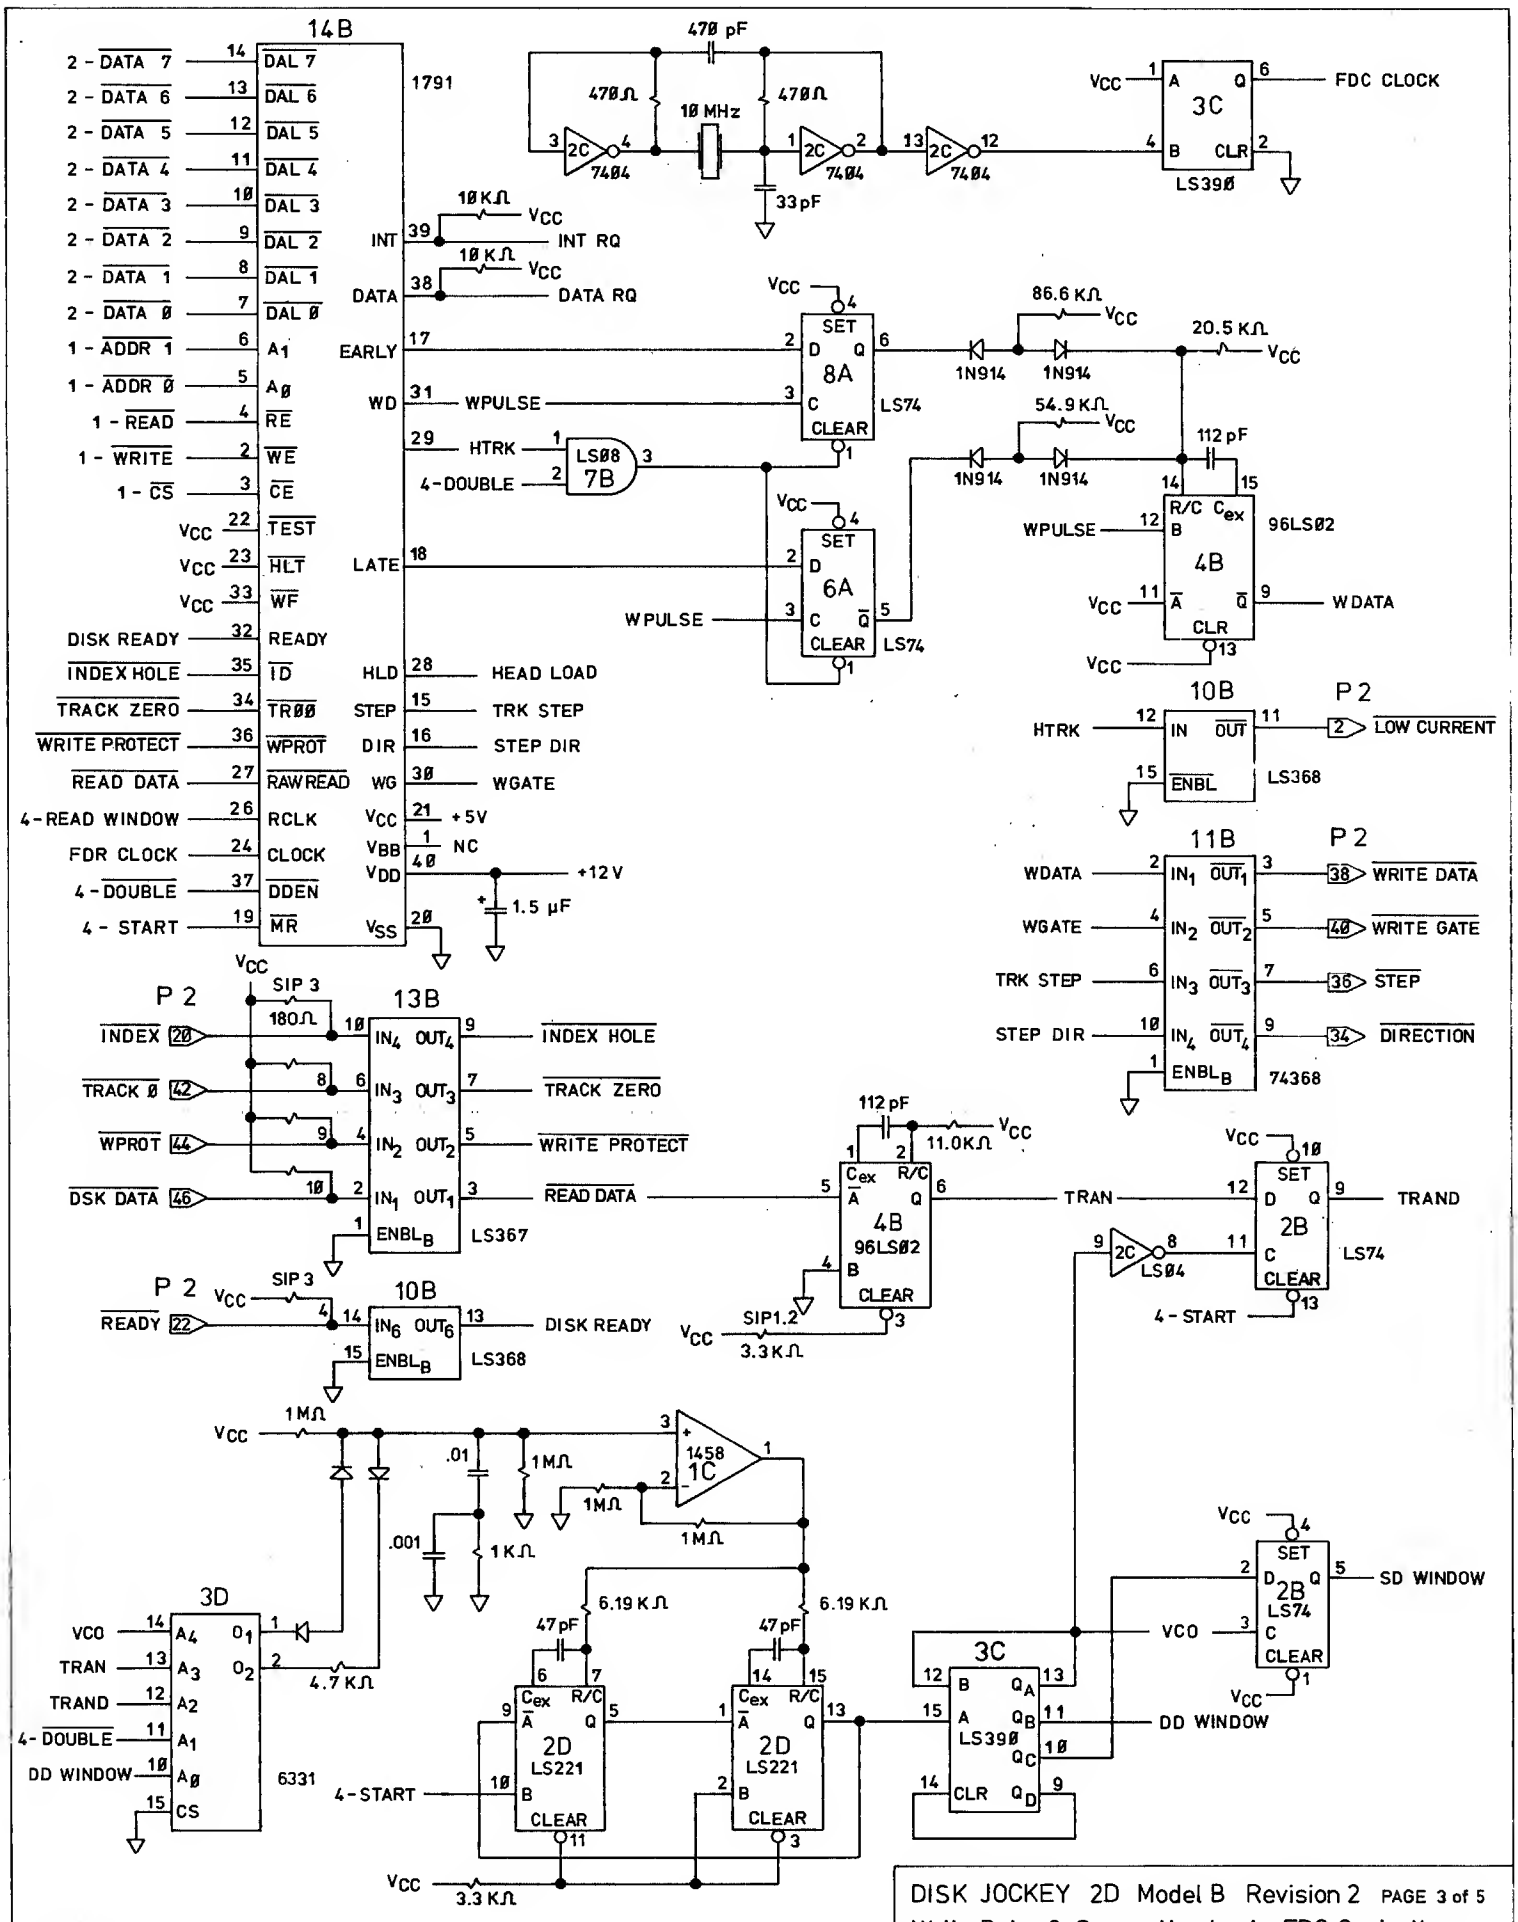

©1980 G. Morrow

DISK JOCKEY 2D Model B Revision 2 PAGE 3 of 5
Write Data & Separation Logic, FDC Controller

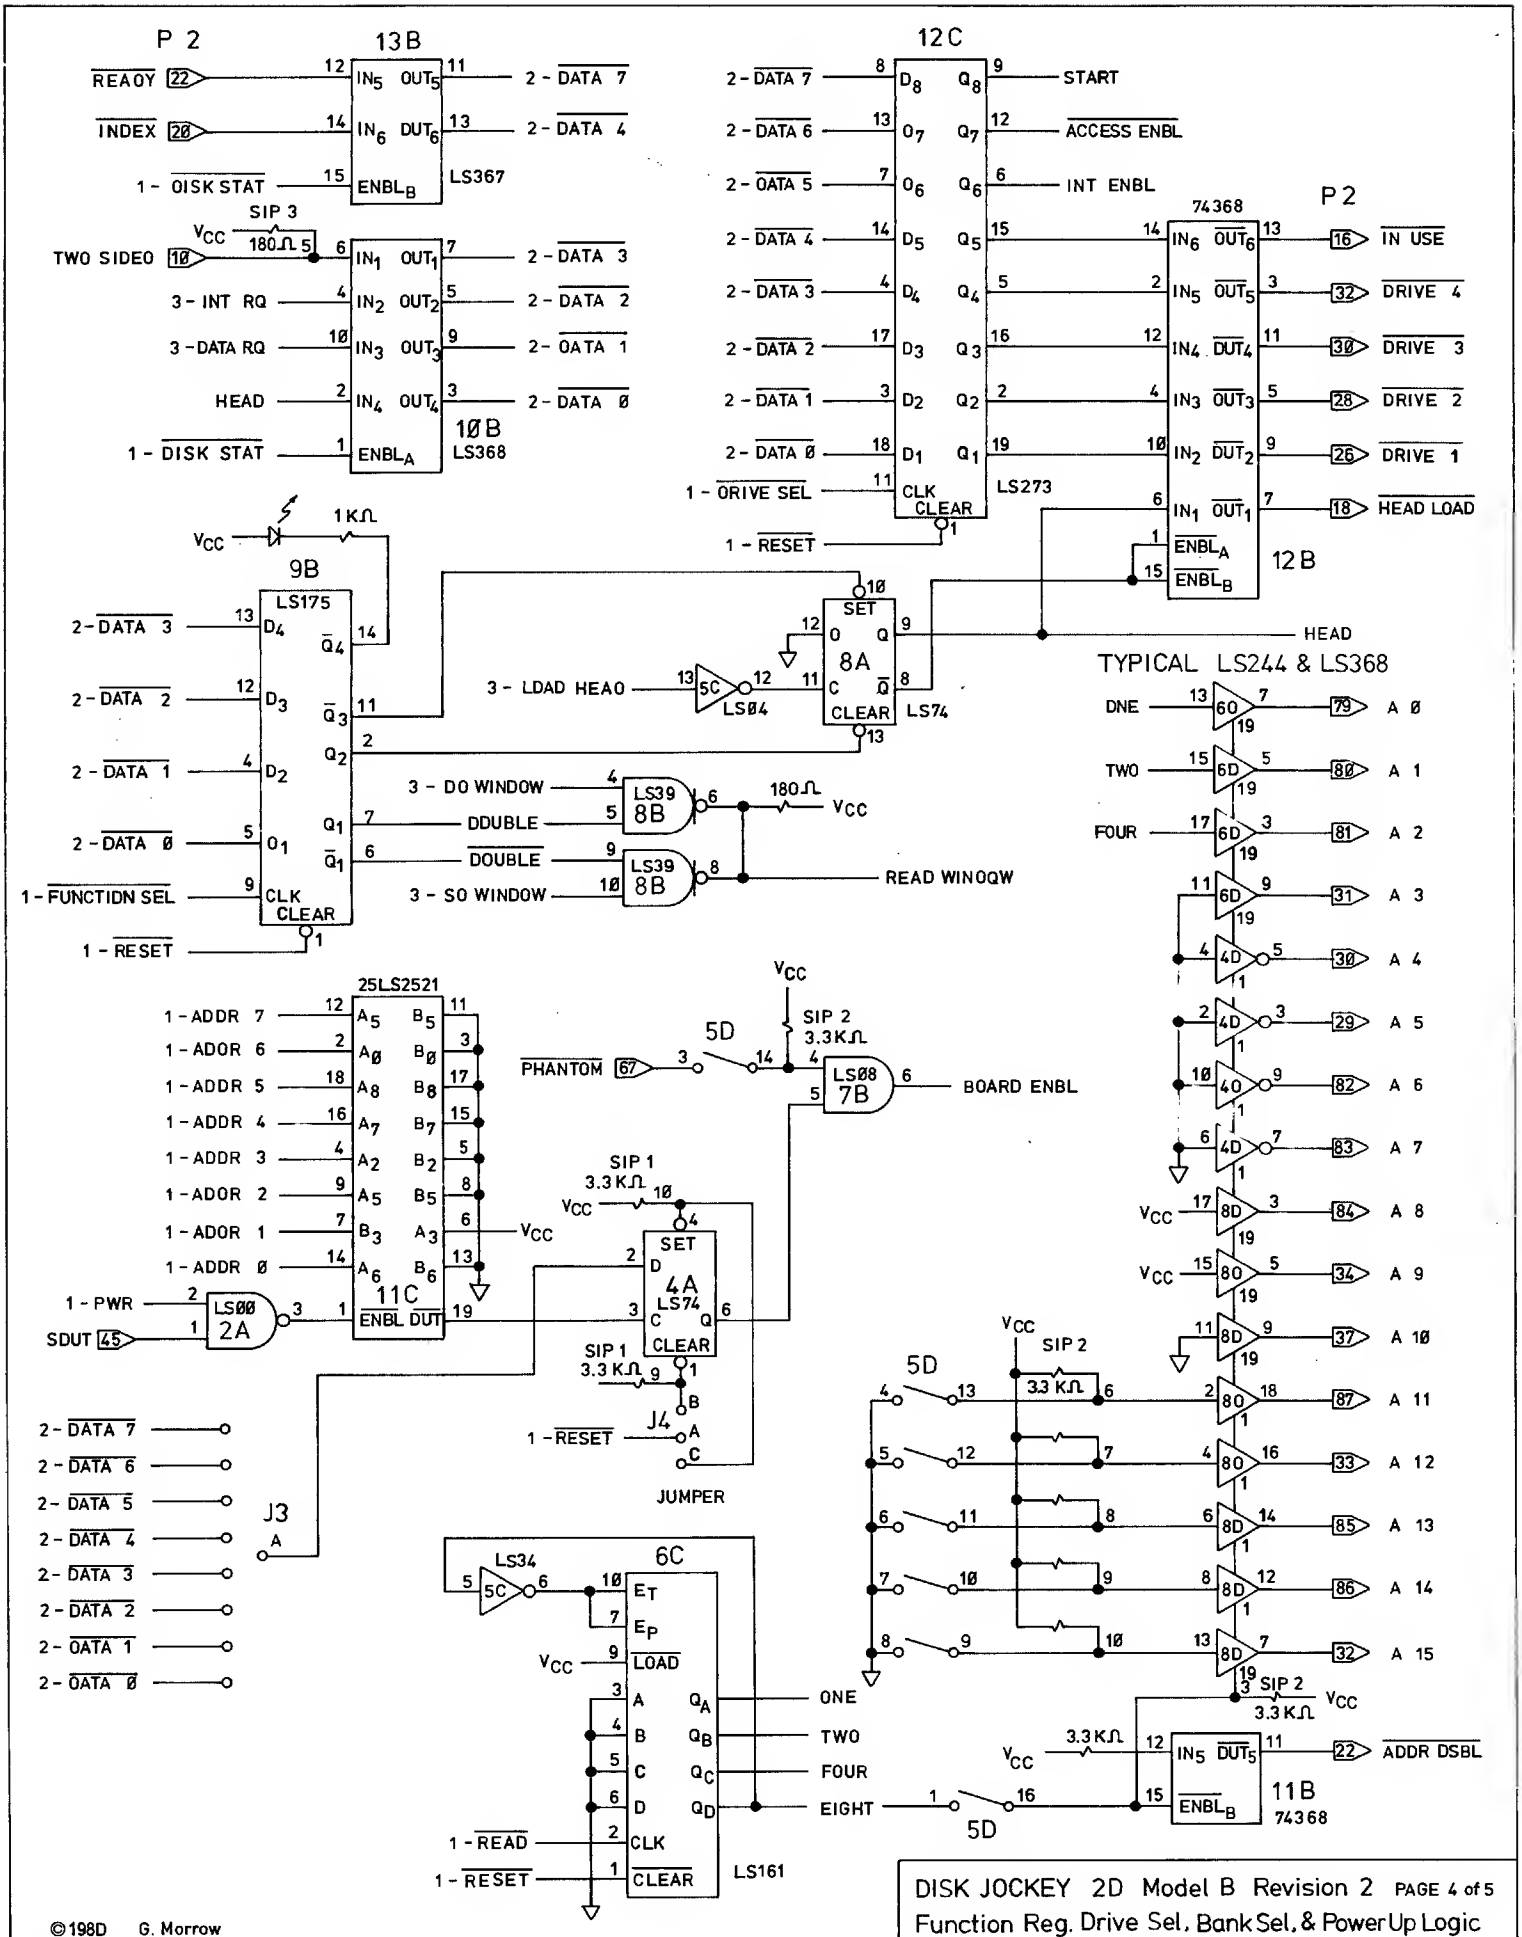
P 2
13B
READY 22
INDEX 20
1 - DISK STAT
2 - DATA 7
2 - DATA 4
LS367
SIP 3
180Ω 5
TWO SIDED 10
3 - INT RQ
3 - DATA RQ
HEAD
1 - DISK STAT
2 - DATA 3
2 - DATA 2
2 - DATA 1
2 - DATA 0
10B
LS368
12C
2 - DATA 7
2 - DATA 6
2 - DATA 5
2 - DATA 4
2 - DATA 3
2 - DATA 2
2 - DATA 1
2 - DATA 0
1 - DRIVE SEL
1 - RESET
START
ACCESS ENBL
INT ENBL
LS273
74368
P2
IN USE
DRIVE 4
DRIVE 3
DRIVE 2
DRIVE 1
HEAD LOAD
12B
1KΩ
9B
LS175
1 - FUNCTION SEL
3 - LOAD HEAD
LS04
8A
LS74
HEAD
3 - DO WINDOW
3 - SO WINDOW
LS39 8B
DDOUBLE
DOUBLE
180Ω
READ WINDOW
TYPICAL LS244 & LS368
DRIVE
TWO
FOUR
A 0
A 1
A 2
A 3
A 4
A 5
A 6
A 7
A 8
A 9
A 10
A 11
A 12
A 13
A 14
A 15
25LS2521
1 - ADDR 7
1 - ADDR 6
1 - ADDR 5
1 - ADDR 4
1 - ADDR 3
1 - ADDR 2
1 - ADDR 1
1 - ADDR 0
11C
ENBL OUT
1 - PWR
SDUT 45
LS00 2A
PHANTOM 67
5D
SIP 2
3.3KΩ
LS08 7B
BOARD ENBL
SIP 1
3.3KΩ
4A
LS74
J4
1 - RESET
JUMPER
J3
2 - DATA 7
2 - DATA 6
2 - DATA 5
2 - DATA 4
2 - DATA 3
2 - DATA 2
2 - DATA 1
2 - DATA 0
LS34
6C
LOAD
ONE
TWO
FOUR
EIGHT
1 - READ
LS161
3.3KΩ
11B
74368
ADDR DSBL
DISK JOCKEY 2D Model B Revision 2 PAGE 4 of 5
Function Reg. Drive Sel, Bank Sel, & Power Up Logic
©198D G. Morrow

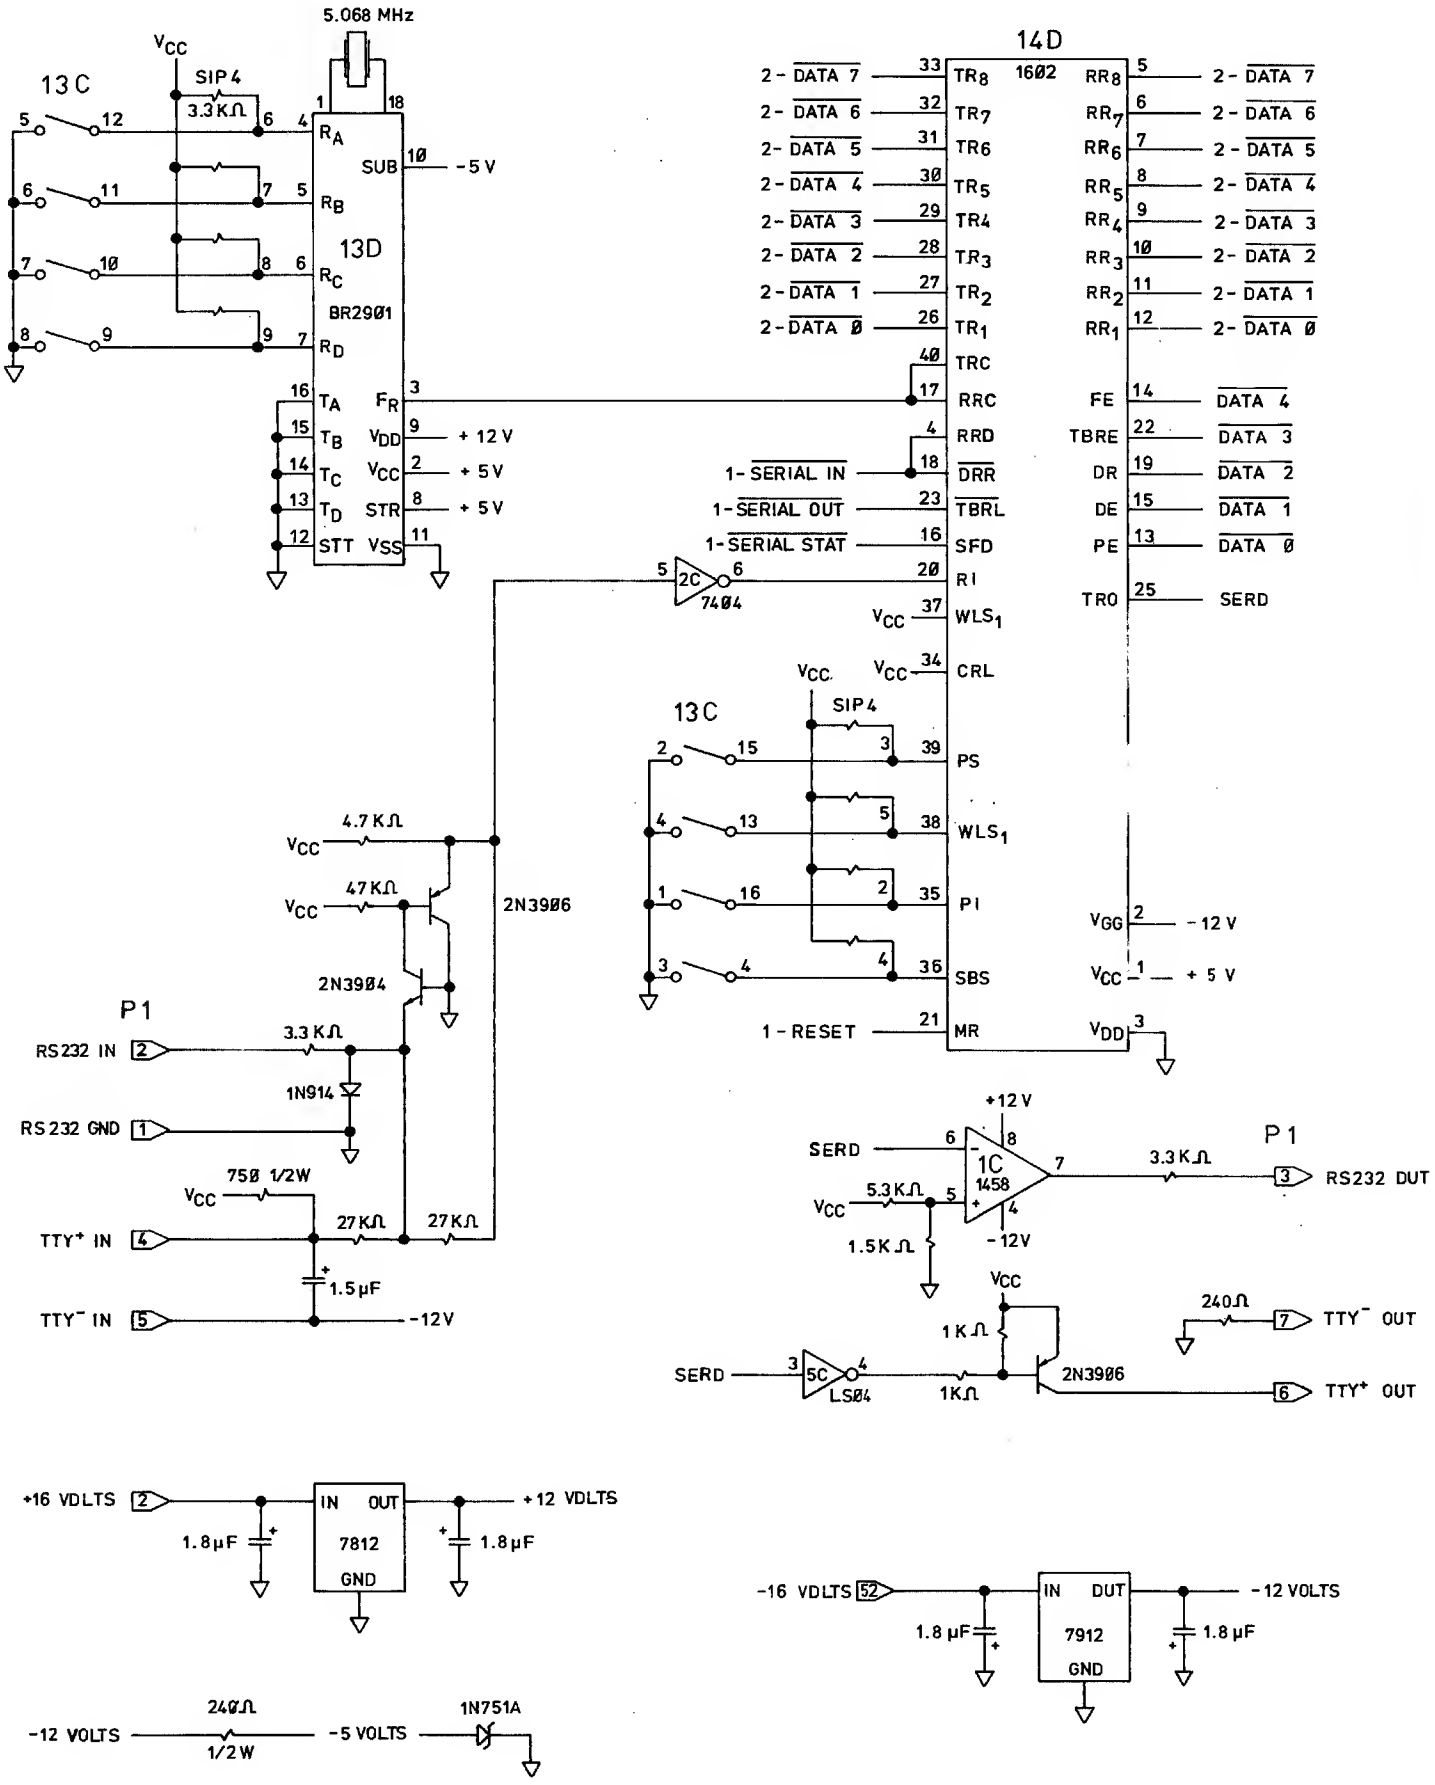

©1980 G. Morrow

DISK JOCKEY 2D Model B Revision 2

Serial Interface Logic